


1 Verify Contents



ConnectPort X2e SE



Ethernet Cable



Power Supply



Quick Start Guide

ConnectPort® X2e Smart Energy

90001262_D


2 Write Down the Serial Number

Write down the following located on the back of the **ConnectPort X2e SE** :

Serial Number: _____


EUI: _____

Install Code: _____

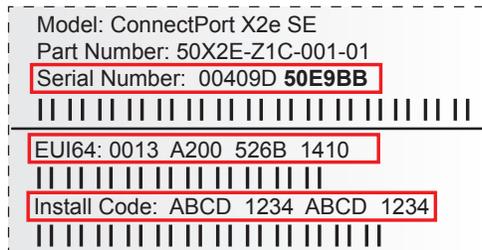


NOTE: The Serial Number is also the Ethernet MAC address, which will be needed to complete Step 4a.

NOTE: EUI and Install Code are needed in step 4 when adding the Router variant of this model to a Smart Meter (or other Coordinator).

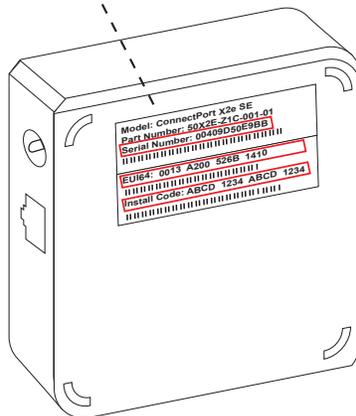

3 Connect Hardware

- Connect the Ethernet cable
- Connect the power supply
- Startup Sequence** - After plugging in the device the Power and Network LEDs will gradually turn solid green.

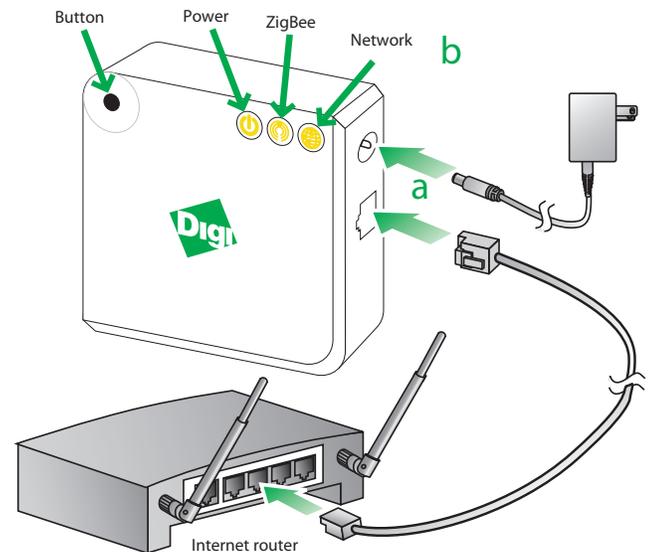

4 Online Installation

IMPORTANT: The Router variant of this model must be successfully joined to a Smart Energy network before moving on to step 4a. Please contact the Utility or owner of the Smart Meter (or other Coordinator) if unsure how to add your Router to the network. The Router must be powered ON when being added or removed on a Smart Energy network.

- Browse to www.livesmartlee.com and sign in to our secure server if you have an existing account or create an account to get started.

5 Troubleshooting

- Power

Status	Description
OFF	No power
Solid green	Device is powered

- ZigBee

Status	Description
OFF	Radio disabled
Blinking green (slow)	Searching for other ZigBee devices on the network
Blinking green (fast)	Establishing a Smart Energy network
Solid green	Connected to a Smart Energy network

- Network

Status	Description
OFF	Powered OFF
Blinking yellow (slow)	Powered ON, no Ethernet link
Blinking yellow (fast)	Ethernet link, no IP address
Solid yellow	IP address assigned
Blinking green (slow)	Attempting a connection to the iDigi server
Blinking green (fast)	iDigi server found, authenticating
Solid green	Connected to iDigi server

- Button - The button is intended for advanced configuration or as directed in the online setup.

Need Help? Call 1-877-693-7849 or visit www.digi.com/support.