

Evaluation Kit for SA60 Pin-Out

INTRODUCTION

Fast and easy breadboarding of circuits using the SA60 are possible with the EK06 evaluation kit. The amplifier may be mounted vertically with the HS20 heat sink, or horizontally. Connections are provided for required power supply bypassing recommended protection components, as well as optional current sense resistors. A large area for component mounting provides flexibility and makes a multitude of circuit configurations possible.

CAUTION

Use the supplied thermal washers or thermal grease between the power amplifier and the heat sink.

ASSEMBLY

1. On the silk screen side of the evaluation board, insert and solder the MS06 mating socket in DUT holes 1 – 12. Be sure each one is fully seated.
2. Solder components for your circuit. Be sure to include proper bypassing. See the SA60 data sheet for help in selecting these components. 1 μ F capacitors and a .10 Ω resistor have been included with the EK06 kit but may be replaced with other components as necessary. C1, not provided, should be selected for the voltage required by the application. See Apex Microtechnology Application Note 30 for guidelines in selecting this bypass capacitor. If current sense resistors are not used, the I SENSE traces on the EVAL11 board must be shorted to power ground in place of the resistors.
3. Place the TW07 thermal washer on the heat sink over the mounting hole for the DUT. Place a #6 screw through the mounting hole and thread a #6 nut onto the screw at the back of the heat sink. Do not tighten. Note that there are two sets of mounting holes on the HS20). Holes on one edge allow room between the DUT and evaluation board for the MS06 socket. The holes on the other edge are for direct through hole mounting of the DUT to the evaluation board. It is recommended that you use the MS06.
4. Mount the DUT to the HS20 by sliding under the head of the #6 screw and on top of the thermal washer. Tighten the nut to the specified 8 to 10 in-lbs. (.9 to .13 N*M). Do not over torque.
5. Install leads of the DUT into the MS06 on the evaluation board. Use #6 self-tapping screws to secure the evaluation board to the HS20 heat sink as shown in the assembly diagram (Figure 1).

PARTS LIST

Part #	Description	Quantity
HS20	Heatsink	1
EVAL11	PC Board	1
MS06	Mating Socket	1
OX7R105KWN	1 μ F Ceramic Capacitor	2
CSR07	.1 Ω 1% Resistor	2
TWO7	Thermal Washer	1 package
HS22	Heatsink	2

BEFORE YOU GET STARTED

- All Apex Microtechnology amplifiers should be handled using proper ESD precautions.
- Always use the heat sink and thermal washers included in this kit.
- Always use adequate power supply bypassing.
- Do not change connections while the circuit is powered.
- Initially set all power supplies to the minimum operating levels allowed in the device data sheet.
- Check for oscillations.
- Power ground and signal ground must be separated to avoid switching noise in the DUT.

FIGURE 1.


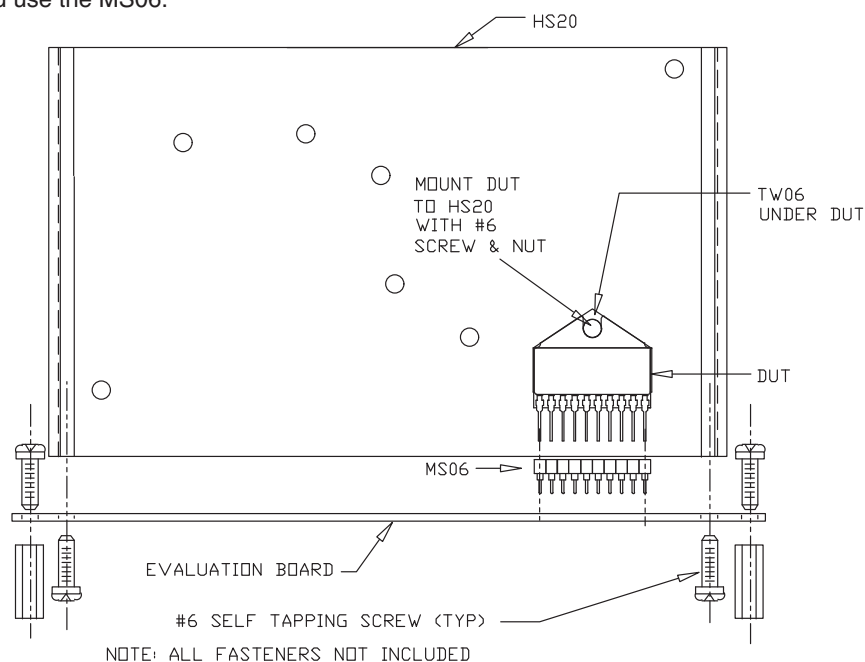


FIGURE 2.

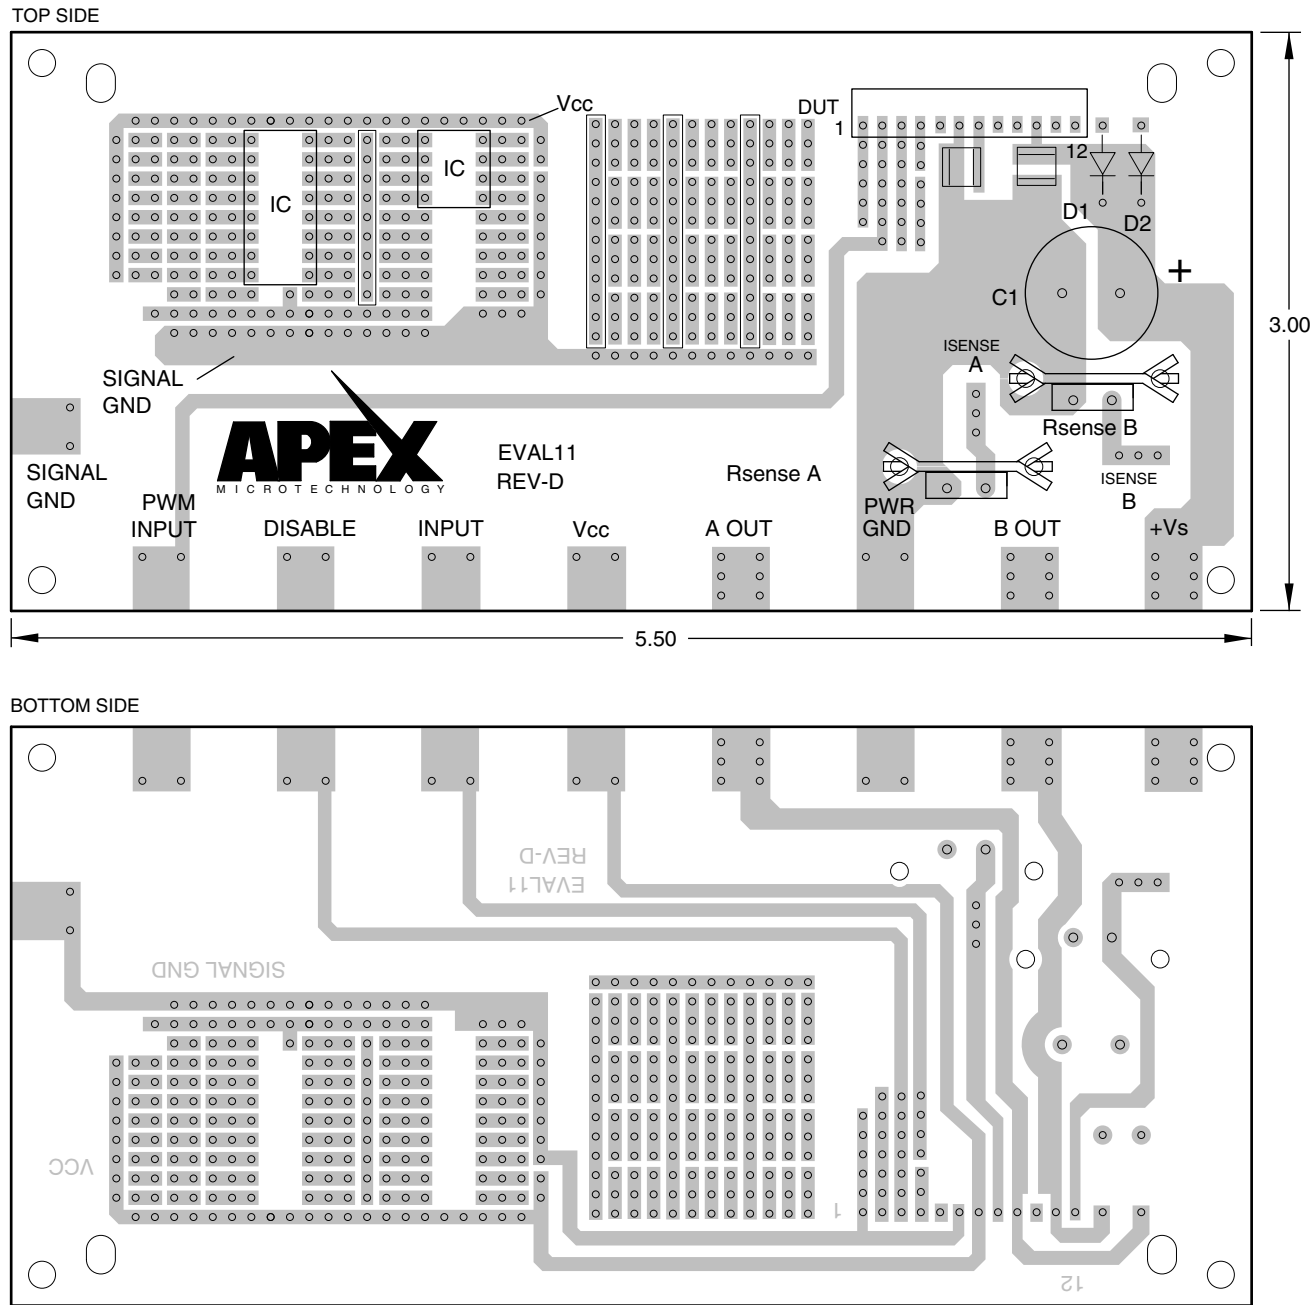

NEED TECHNICAL HELP? CONTACT APEX SUPPORT!

For all Apex Microtechnology product questions and inquiries, call toll free 800-546-2739 in North America.

For inquiries via email, please contact apex.support@apexanalog.com.

International customers can also request support by contacting their local Apex Microtechnology Sales Representative.

To find the one nearest to you, go to www.apexanalog.com

IMPORTANT NOTICE

Apex Microtechnology, Inc. has made every effort to insure the accuracy of the content contained in this document. However, the information is subject to change without notice and is provided "AS IS" without warranty of any kind (expressed or implied). Apex Microtechnology reserves the right to make changes without further notice to any specifications or products mentioned herein to improve reliability. This document is the property of Apex Microtechnology and by furnishing this information, Apex Microtechnology grants no license, expressed or implied under any patents, mask work rights, copyrights, trademarks, trade secrets or other intellectual property rights. Apex Microtechnology owns the copyrights associated with the information contained herein and gives consent for copies to be made of the information only for use within your organization with respect to Apex Microtechnology integrated circuits or other products of Apex Microtechnology. This consent does not extend to other copying such as copying for general distribution, advertising or promotional purposes, or for creating any work for resale.

APEX MICROTECHNOLOGY PRODUCTS ARE NOT DESIGNED, AUTHORIZED OR WARRANTED TO BE SUITABLE FOR USE IN PRODUCTS USED FOR LIFE SUPPORT, AUTOMOTIVE SAFETY, SECURITY DEVICES, OR OTHER CRITICAL APPLICATIONS. PRODUCTS IN SUCH APPLICATIONS ARE UNDERSTOOD TO BE FULLY AT THE CUSTOMER OR THE CUSTOMER'S RISK.

Apex Microtechnology, Apex and Apex Precision Power are trademarks of Apex Microtechnology, Inc. All other corporate names noted herein may be trademarks of their respective holders.