

LM3702/LM3703 Microprocessor Supervisory Circuits with Low Line Output and Manual Reset

Check for Samples: [LM3702](#), [LM3703](#)


FEATURES

- **Standard Reset Threshold Voltage: 3.08V**
- **Custom Reset Threshold Voltages: For Other Voltages Between 2.2V and 5.0V in 10mV Increments, Contact Texas Instruments.**
- **No External Components Required**
- **Manual-Reset Input**
- **$\overline{\text{RESET}}$ (LM3702) or $\overline{\text{RESET}}$ (LM3703) Outputs**
- **Precision Supply Voltage Monitor**
- **Factory Programmable Reset Timeout Delay**
- **Available in DSBGA Package for Minimum Footprint**
- **$\pm 0.5\%$ Reset Threshold Accuracy at Room Temperature**
- **$\pm 2\%$ Reset Threshold Accuracy Over Temperature Extremes**
- **Reset Assertion Down to 1V V_{CC} ($\overline{\text{RESET}}$ Option Only)**
- **28 μA V_{CC} Supply Current**

APPLICATIONS

- **Embedded Controllers and Processors**
- **Intelligent Instruments**
- **Automotive Systems**
- **Critical μP Power Monitoring**

Typical Application

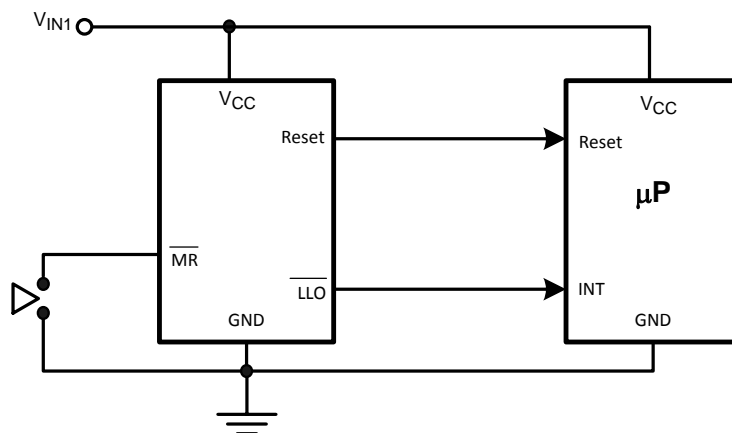

DESCRIPTION

The LM3702/LM3703 series of microprocessor supervisory circuits provide the maximum flexibility for monitoring power supplies and battery controlled functions in systems without backup batteries. The LM3702/LM3703 series are available in a 9-bump DSBGA package.

Built-in features include the following:

Reset: Reset is asserted during power-up, power-down, and brownout conditions. $\overline{\text{RESET}}$ is ensured down to V_{CC} of 1.0V.

Manual Reset Input: An input that asserts reset when pulled low.

Low Line Output: This early power failure warning indicator goes low when the supply voltage drops to a value which is 2% higher than the reset threshold voltage.




Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

All trademarks are the property of their respective owners.

Connection Diagram

Figure 1.



**Figure 2. Top View
(looking from the coating side)
DSBGA 9 Bump Package**

PIN DESCRIPTIONS

| Bump No. | Name | Function |
|------------|---------------------------|---|
| A1 | $\overline{\text{MR}}$ | Manual-Reset input. When $\overline{\text{MR}}$ is less than V_{MRT} (Manual Reset Threshold) $\overline{\text{RESET}}$ /RESET is engaged. |
| B1 | V_{CC} | Power Supply input. |
| C1 | $\overline{\text{RESET}}$ | Reset Logic Output. Pulses low for t_{RP} (Reset Timeout Period) when triggered, and stays low whenever V_{CC} is below the reset threshold or when MR is below V_{MRT} . It remains low for t_{RP} after either V_{CC} rises above the reset threshold, or after MR input rises above V_{MRT} (LM3702 only). |
| | RESET | Reset Logic Output. RESET is the inverse of $\overline{\text{RESET}}$ (LM3703 only). |
| C3 | $\overline{\text{LLO}}$ | Low-Line Logic Output. Early Power-Fail warning output. Low when V_{CC} falls below V_{LLOT} (Low-Line Output Threshold). This output can be used to generate an NMI (Non-Maskable Interrupt) to provide an early warning of imminent power-failure. |
| B3 | GND | Ground reference for all signals. |
| A2, A3, C2 | NC | No Connect. |
| B2 | NC | No Connect. Test input used at factory only. Leave floating. |

Block Diagram

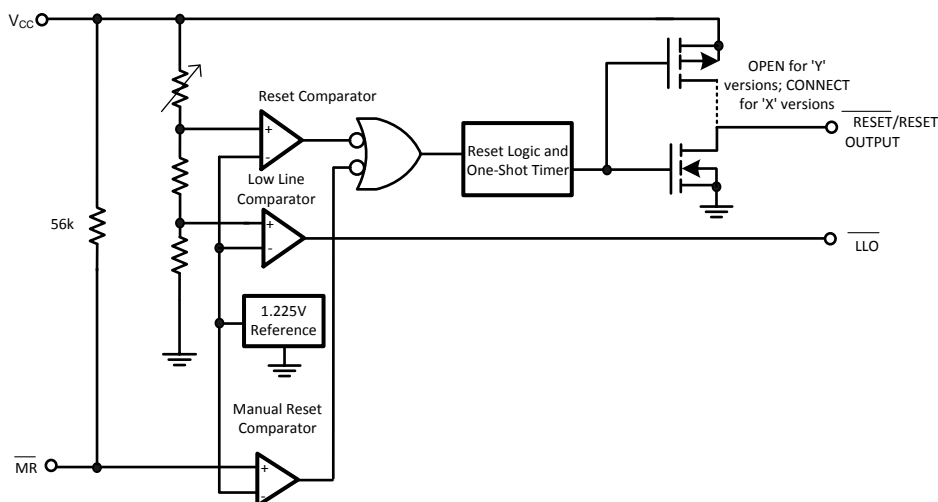


Table 1. Table Of Functions

| Part Number | Active Low Reset | Active High Reset | Output (X = totem-pole) (Y = open-drain) | Reset Timeout Period | Manual Reset | Low Line Output |
|-------------|------------------|-------------------|--|----------------------|--------------|-----------------|
| LM3702 | x | | X, Y ⁽¹⁾ | Customized | x | x |
| LM3703 | | x | X | Customized | x | x |

(1) = available upon request. Contact TI



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

ABSOLUTE MAXIMUM RATINGS⁽¹⁾⁽²⁾

| | | |
|-----------------------------------|------------------|---------------------------------|
| Supply Voltage (V _{CC}) | | –0.3V to 6.0V |
| All Other Inputs | | –0.3V to V _{CC} + 0.3V |
| ESD Ratings ⁽³⁾ | Human Body Model | 1.5kV |
| | Machine Model | 150V |
| Power Dissipation | | See ⁽⁴⁾ |

- Absolute Maximum Ratings** indicate limits beyond which damage to the device may occur. **Operating Ratings** indicate conditions for which the device is intended to be functional, but do not ensure specific performance limits. For ensured specifications and test conditions, see the Electrical Characteristics. The ensured specifications apply only for the test conditions listed. Some performance characteristics may degrade when the device is not operated under the listed conditions.
- If Military/Aerospace specified devices are required, please contact the TI Sales Office/ Distributors for availability and specifications.
- The Human Body model is a 100 pF capacitor discharged through a 1.5 kΩ resistor into each pin. The machine model is a 200pF capacitor discharged directly into each pin.
- The maximum allowable power dissipation is a function of the maximum junction temperature, T_J(MAX), the junction-to-ambient thermal resistance, θ_{J-A}, and the ambient temperature, T_A. The maximum allowable power dissipation at any ambient temperature is calculated using:

$$P(MAX) = \frac{T_J(MAX) - T_A}{\theta_{J-A}}$$

Where the value of θ_{J-A} for the DSBGA package is 220°C/W.

OPERATING RATINGS⁽¹⁾

| | |
|-------------------|-------------------------------|
| Temperature Range | –40°C ≤ T _J ≤ 85°C |
|-------------------|-------------------------------|

- Absolute Maximum Ratings** indicate limits beyond which damage to the device may occur. **Operating Ratings** indicate conditions for which the device is intended to be functional, but do not ensure specific performance limits. For ensured specifications and test conditions, see the Electrical Characteristics. The ensured specifications apply only for the test conditions listed. Some performance characteristics may degrade when the device is not operated under the listed conditions.

LM3702/LM3703 SERIES ELECTRICAL CHARACTERISTICS

Limits in the standard typeface are for T_J = 25°C and limits in **boldface type** apply over full operating range. Unless otherwise specified: V_{CC} = +2.2V to 5.5V.

| Symbol | Parameter | Conditions | Min | Typ | Max | Units |
|------------------------|--|--|--|--------------------------|--|-------|
| POWER SUPPLY | | | | | | |
| V _{CC} | Operating Voltage Range: V _{CC} | LM3702 | 1.0 | | 5.5 | V |
| | | LM3703 | 1.2 | | 5.5 | |
| I _{CC} | V _{CC} Supply Current | All inputs = V _{CC} ; all outputs floating | | 28 | 50 | μA |
| RESET THRESHOLD | | | | | | |
| V _{RST} | Reset Threshold | V _{CC} falling | –0.5 –2 | V _{RST} | +0.5 +2 | % |
| | | V _{CC} falling: T _A = 0°C to 70°C | –1.5 | | +1.5 | |
| V _{RSTH} | Reset Threshold Hysteresis | | | 0.0032•V _{RST} | | mV |
| t _{RP} | Reset Timeout Period | Reset Timeout Period = A Reset Timeout Period = B Reset Timeout Period = C Reset Timeout Period = D | 1 20 140 1120 | 1.4 28 200 1600 | 2 40 280 2240 | ms |
| t _{RD} | V _{CC} to Reset Delay | V _{CC} falling at 1mV/μs | | 20 | | μs |

LM3702/LM3703 SERIES ELECTRICAL CHARACTERISTICS (continued)

Limits in the standard typeface are for $T_J = 25^\circ\text{C}$ and limits in **boldface type** apply over full operating range. Unless otherwise specified: $V_{CC} = +2.2\text{V}$ to 5.5V .

| Symbol | Parameter | Conditions | Min | Typ | Max | Units |
|--------------------|--|--|------------------------|-------------------------|-----------------------|-------|
| RESET (LM3703) | | | | | | |
| V _{OL} | RESET | V _{CC} > 2.25V, I _{SINK} = 900μA | | | 0.3 | V |
| | | V _{CC} > 2.7V, I _{SINK} = 1.2mA | | | 0.3 | |
| | | V _{CC} > 4.5V, I _{SINK} = 3.2mA | | | 0.4 | |
| V _{OH} | RESET | V _{CC} > 1.2V, I _{SOURCE} = 50μA | 0.8 V _{CC} | | | V |
| | | V _{CC} > 1.8V, I _{SOURCE} = 150μA | 0.8 V _{CC} | | | |
| | | V _{CC} > 2.25V, I _{SOURCE} = 300μA | 0.8 V _{CC} | | | |
| | | V _{CC} > 2.7V, I _{SOURCE} = 500μA | 0.8 V _{CC} | | | |
| | | V _{CC} > 4.5V, I _{SOURCE} = 800μA | V _{CC} - 1.5V | | | |
| I _{LKG} | Output Leakage Current | V _{RESET} = 5.5V | | | 1.0 | μA |
| RESET (LM3702) | | | | | | |
| V _{OL} | RESET | V _{CC} > 1.0V, I _{SINK} = 50μA | | | 0.3 | V |
| | | V _{CC} > 1.2V, I _{SINK} = 100μA | | | 0.3 | |
| | | V _{CC} > 2.25V, I _{SINK} = 900μA | | | 0.3 | |
| | | V _{CC} > 2.7V, I _{SINK} = 1.2mA | | | 0.3 | |
| | | V _{CC} > 4.5V, I _{SINK} = 3.2mA | | | 0.4 | |
| V _{OH} | RESET | V _{CC} > 2.25V, I _{SOURCE} = 300μA | 0.8 V _{CC} | | | V |
| | | V _{CC} > 2.7V, I _{SOURCE} = 500μA | 0.8 V _{CC} | | | |
| | | V _{CC} > 4.5V, I _{SOURCE} = 800μA | V _{CC} - 1.5V | | | |
| MR | | | | | | |
| V _{MRT} | MR Input Threshold | MR, Low | | | 0.8 | V |
| | | MR, High | 2.0 | | | |
| V _{MRTH} | MR Threshold Hysteresis | MR falling: V _{CC} = V _{RST MAX} to 5.5V | | 0.0032•V _{RST} | | mV |
| R _{MR} | MR Pull-up Resistance | | 35 | 56 | 75 | kΩ |
| t _{MD} | MR to Reset Delay | | | 12 | | μS |
| t _{MR} | MR Pulse Width | | 25 | | | μS |
| LLO | | | | | | |
| V _{OL} | LLO Output Voltage | V _{CC} > 2.25V, I _{SINK} = 900μA | | | 0.3 | V |
| | | V _{CC} > 2.7V, I _{SINK} = 1.2mA | | | 0.3 | |
| | | V _{CC} > 4.5V, I _{SINK} = 3.2mA | | | 0.4 | |
| V _{OH} | | V _{CC} > 2.25V, I _{SOURCE} = 300μA | 0.8 V _{CC} | | | V |
| | | V _{CC} > 2.7V, I _{SOURCE} = 500μA | 0.8 V _{CC} | | | |
| | | V _{CC} > 4.5V, I _{SOURCE} = 800μA | V _{CC} - 1.5V | | | |
| LLO OUTPUT | | | | | | |
| V _{LLOT} | LLO Output Threshold (V _{LLO} - V _{RST} , V _{CC} falling) | | 1.01•V _{RST} | 1.02•V _{RST} | 1.03•V _{RST} | V |
| V _{LLOTH} | Low-Line Comparator Hysteresis | | | 0.0032•V _{RST} | | mV |
| t _{CD} | Low-Line Comparator Delay | V _{CC} falling at 1mV/μs | | 20 | | μs |

TYPICAL PERFORMANCE CHARACTERISTICS

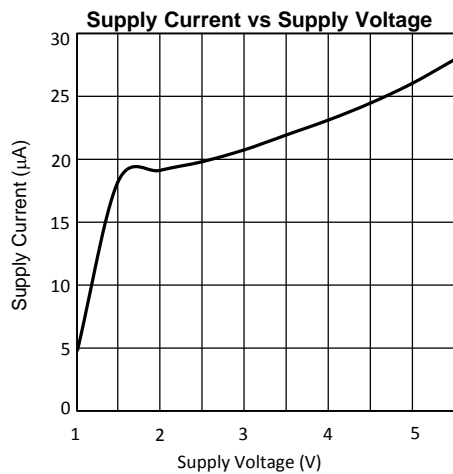


Figure 3.

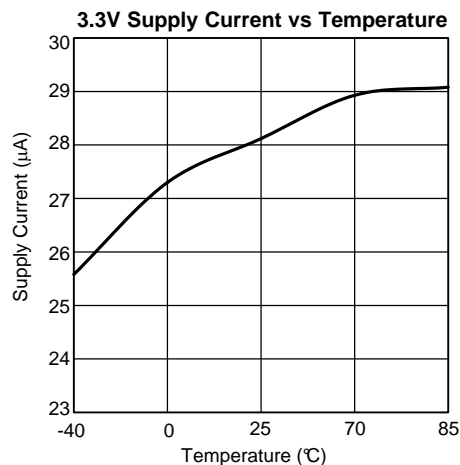


Figure 4.

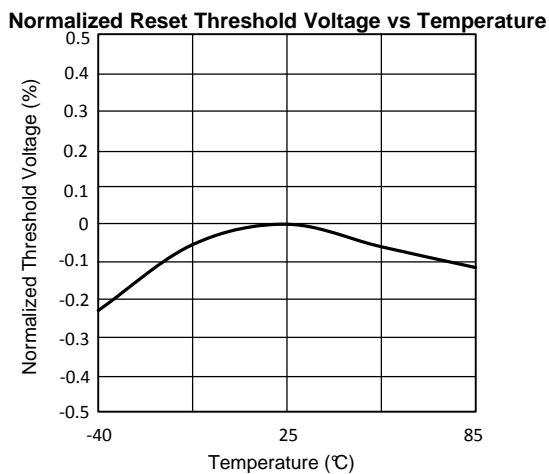


Figure 5.

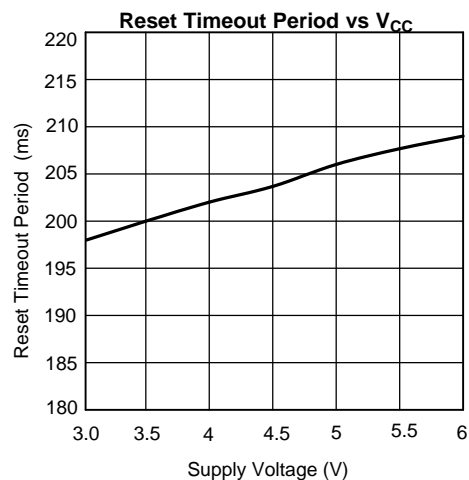


Figure 6.

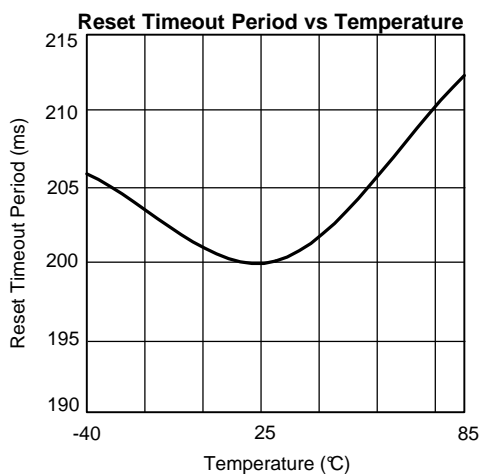


Figure 7.

**Max. Transient Duration vs Reset Comparator Overdrive
($V_{CC} = 3.3V$)**

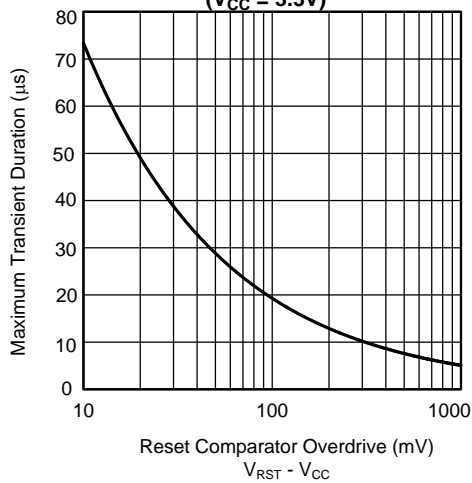
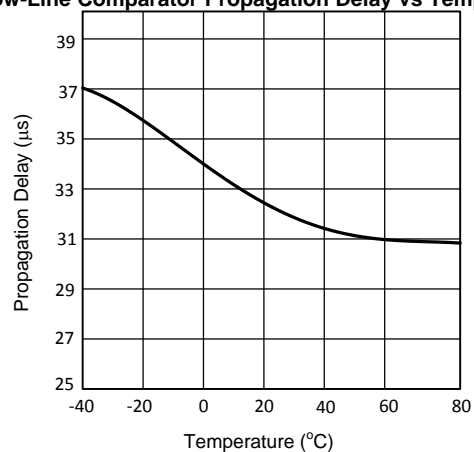


Figure 8.

TYPICAL PERFORMANCE CHARACTERISTICS (continued)**Low-Line Comparator Propagation Delay vs Temperature****Figure 9.**

CIRCUIT INFORMATION

RESET OUTPUT

The Reset input of a μP initializes the device into a known state. The LM3702/LM3703 microprocessor supervisory circuits assert a forced reset output to prevent code execution errors during power-up, power-down, and brownout conditions.

$\overline{\text{RESET}}$ is ensured valid for $V_{\text{CC}} > 1\text{V}$. Once V_{CC} exceeds the reset threshold, an internal timer maintains the output for the reset timeout period. After this interval, reset goes high. The LM3702 offers an active-low $\overline{\text{RESET}}$; The LM3703 offers an active-high RESET.

Any time V_{CC} drops below the reset threshold (such as during a brownout), the reset activates. When V_{CC} again rises above the reset threshold, the internal timer starts. Reset holds until V_{CC} exceeds the reset threshold for longer than the reset timeout period. After this time, reset releases.

The Manual Reset input ($\overline{\text{MR}}$) will initiate a forced reset also. See the [MANUAL RESET INPUT \(\$\overline{\text{MR}}\$ \)](#) section.

RESET THRESHOLD

The LM3702/LM3703 family is available with a reset voltage of 3.08V. Other reset thresholds in the 2.20V to 5.0V range, in steps of 10 mV, are available; contact TI for details.

MANUAL RESET INPUT ($\overline{\text{MR}}$)

Many μP -based products require a manual reset capability, allowing the operator to initiate a reset. The $\overline{\text{MR}}$ input is fully debounced and provides an internal 56 k Ω pull-up. When the $\overline{\text{MR}}$ input is pulled below V_{MRT} (1.225V) for more than 25 μs , reset is asserted after a typical delay of 12 μs . Reset remains active as long as $\overline{\text{MR}}$ is held low, and releases after the reset timeout period expires after $\overline{\text{MR}}$ rises above V_{MRT} . Use $\overline{\text{MR}}$ with digital logic to assert or to daisy chain supervisory circuits. It may be used as another low-line comparator by adding a buffer.

LOW-LINE OUTPUT ($\overline{\text{LLO}}$)

The low-line output comparator is typically used to provide a non-maskable interrupt to a μP when V_{CC} begins falling. $\overline{\text{LLO}}$ monitors V_{CC} and goes low when V_{CC} falls below V_{LLOT} (typically $1.02 \cdot V_{\text{RST}}$) with hysteresis of $0.0032 \cdot V_{\text{RST}}$.

SPECIAL PRECAUTIONS FOR THE DSBGA PACKAGE

As with most integrated circuits, the LM3702 and LM3703 are sensitive to exposure from visible and infrared (IR) light radiation. Unlike a plastic encapsulated IC, the DSBGA package has very limited shielding from light, and some sensitivity to light reflected from the surface of the PC board or long wavelength IR entering the die from the side may be experienced. This light could have an unpredictable affect on the electrical performance of the IC. Care should be taken to shield the device from direct exposure to bright visible or IR light during operation.

DSBGA MOUNTING

The DSBGA package requires specific mounting techniques which are detailed in TI Application Note AN-1112 ([SNVA009](#)). Referring to the section **Surface Mount Technology (SMT) Assembly Considerations**, it should be noted that the pad style which must be used with the 9-pin package is the NSMD (non-solder mask defined) type.

For best results during assembly, alignment ordinals on the PC board may be used to facilitate placement of the DSBGA device.

Timing Diagrams

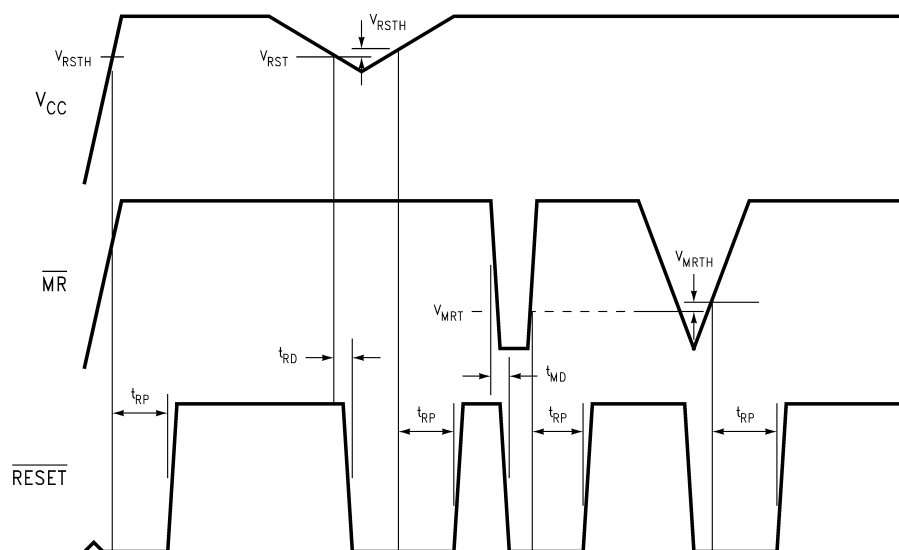


Figure 10. LM3702 Reset Time with \overline{MR}

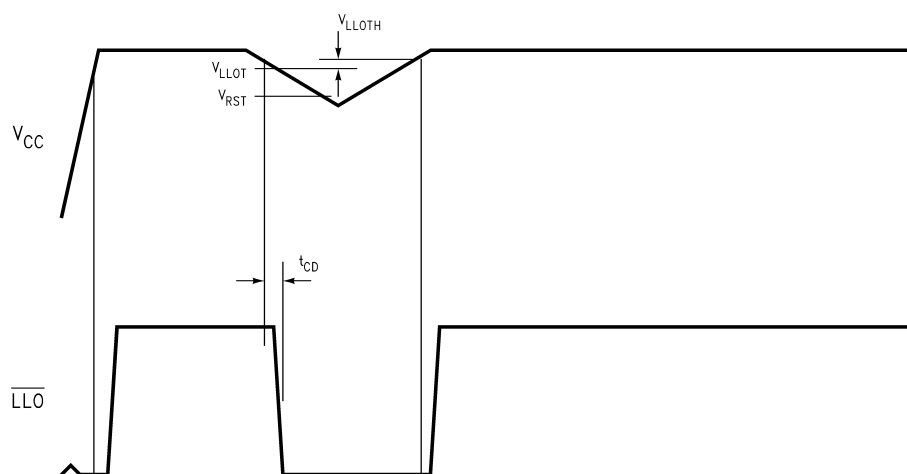


Figure 11. \overline{LLO} Output

Typical Application Circuits

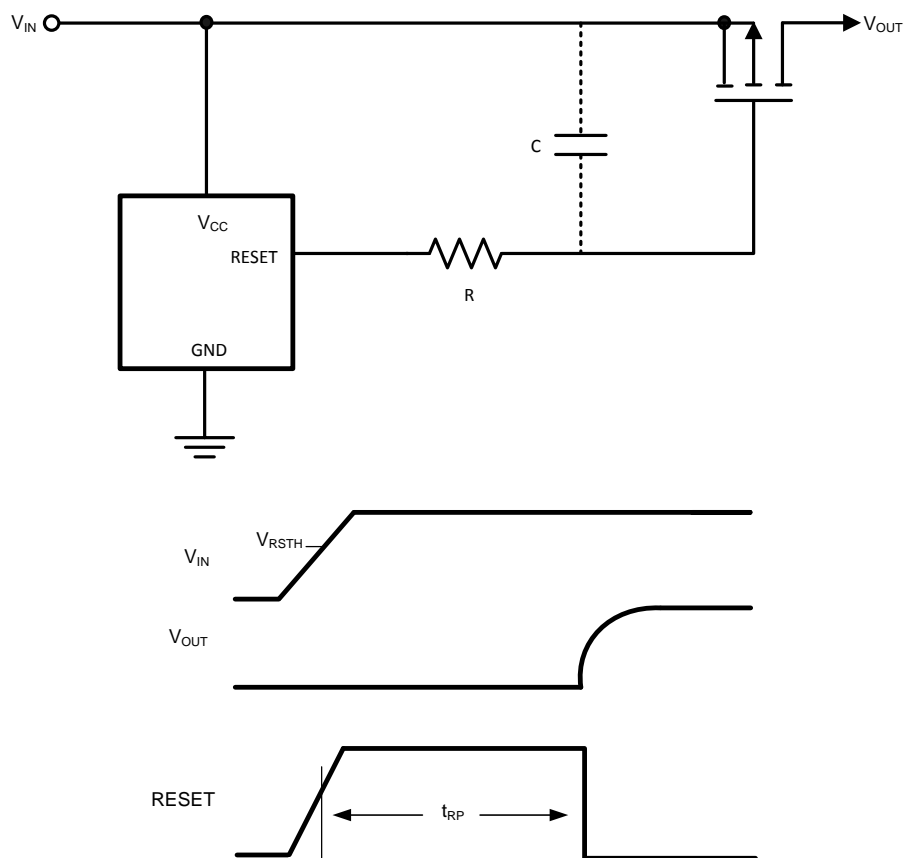


Figure 12. LM3703 Power-On Delay

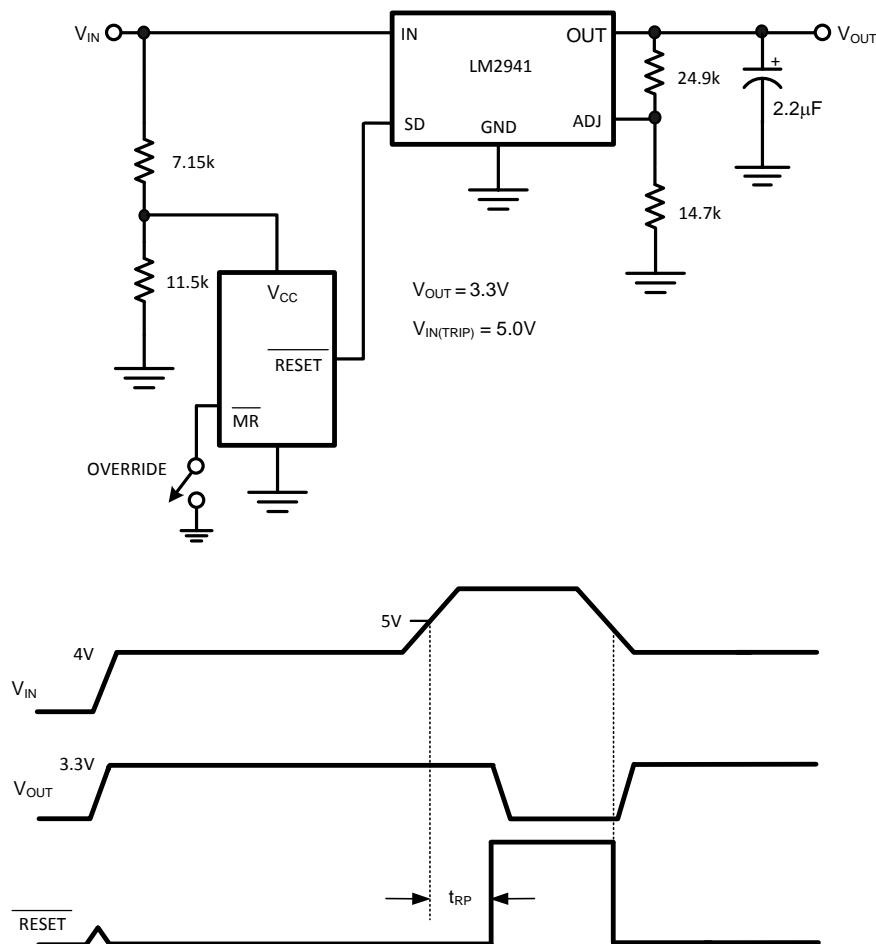


Figure 13. Regulator/Switch with Long-Term Overvoltage Lockout Prevents Overdissipation in Linear Regulator

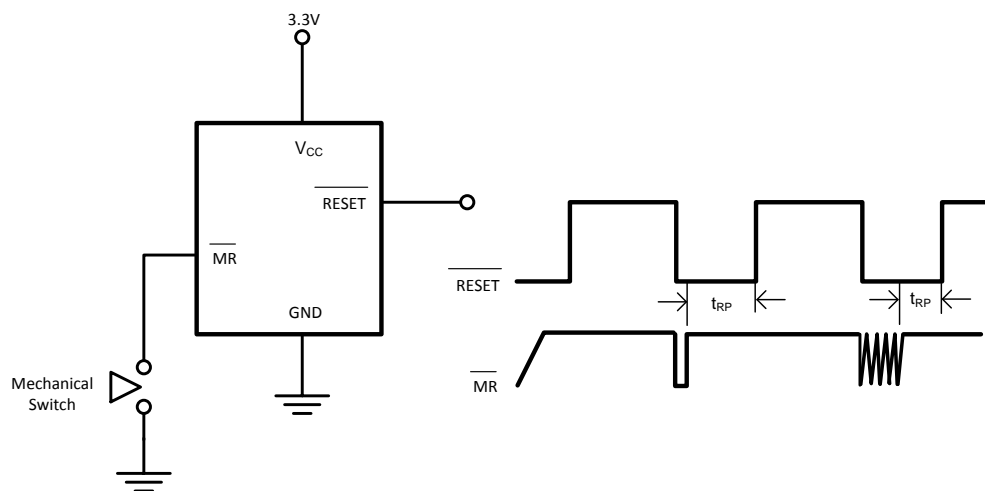


Figure 14. Switch Debouncer

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products

| | |
|------------------------------|--|
| Audio | www.ti.com/audio |
| Amplifiers | amplifier.ti.com |
| Data Converters | dataconverter.ti.com |
| DLP® Products | www.dlp.com |
| DSP | dsp.ti.com |
| Clocks and Timers | www.ti.com/clocks |
| Interface | interface.ti.com |
| Logic | logic.ti.com |
| Power Mgmt | power.ti.com |
| Microcontrollers | microcontroller.ti.com |
| RFID | www.ti-rfid.com |
| OMAP Applications Processors | www.ti.com/omap |
| Wireless Connectivity | www.ti.com/wirelessconnectivity |

Applications

| | |
|-------------------------------|--|
| Automotive and Transportation | www.ti.com/automotive |
| Communications and Telecom | www.ti.com/communications |
| Computers and Peripherals | www.ti.com/computers |
| Consumer Electronics | www.ti.com/consumer-apps |
| Energy and Lighting | www.ti.com/energy |
| Industrial | www.ti.com/industrial |
| Medical | www.ti.com/medical |
| Security | www.ti.com/security |
| Space, Avionics and Defense | www.ti.com/space-avionics-defense |
| Video and Imaging | www.ti.com/video |

TI E2E Community

e2e.ti.com