

SI-3000KF Series

Low Current Consumption, Low Dropout Voltage

Features

- Compact full-mold package (equivalent to TO220)
- Output current: 1.0A
- Low dropout voltage: $V_{DIF} \leq 0.5V$ (at $I_o = 1.0A$)
- High ripple rejection: 75dB
- Low circuit current at output OFF: $I_q (OFF) \leq 1\mu A$
- Built-in overcurrent and thermal protection circuits

Applications

- Secondary stabilized power supply (local power supply)

Recommended Operating Conditions

Parameter	Symbol	Ratings	Unit
		SI-3010KF	
Input Voltage Range	V_{IN}	2.4 ^{*2} to 27 ^{*1}	V
Output Current Range	I_o	0 to 1.0 ^{*1}	A
Output Voltage Variable Range	V_oADJ	1.1 to 16	V
Operating Ambient Temperature	T_{op}	−30 to +85	°C
Operating Junction Temperature	T_j	−20 to +100	°C

*1: V_{IN} (max) and I_o (max) are restricted by the relationship P_D (max) = $(V_{IN} - V_o) \times I_o = 16.6W$.

*2: Refer to the Dropout Voltage parameter.

Electrical Characteristics

Parameter		Symbol	Ratings			Unit
			SI-3010KF			
			min.	typ.	max.	
Reference Voltage		V _{ADJ}	0.98	1.00	1.02	V
		Conditions	V _{IN} =7V, I _o =0.01A, V _C =2V, V _O =5A			
Line Regulation		ΔV _{OLINE}			30	mV
		Conditions	V _{IN} =6 to 15V, I _o =0.01A, V _C =2V, V _O =5A			
Load Regulation		ΔV _{OLOAD}			75	mV
		Conditions	V _{IN} =7V, I _o =0 to 1A, V _C =2V, V _O =5A			
Dropout Voltage		V _{DIF}			0.3	V
		Conditions	I _o =0.5A, V _C =2V, V _O =5V			
					0.5	
		Conditions	I _o =1.0A, V _C =2V, V _O =5V			
Quiescent Circuit Current		I _q			600	μA
		Conditions	V _{IN} =7V, I _o =0A, V _C =2V			
Circuit Current at Output OFF		I _q (OFF)			1	μA
		Conditions	V _{IN} =7V, V _C =0V			
Temperature Coefficient of Output Voltage		ΔV _O /ΔT _a		±0.5		mV/°C
		Conditions	V _{IN} =7V, I _o =0.01A, V _C =2V, T _J =0 to 100°C, V _O =2.5V			
Ripple Rejection		R _{REJ}		75		dB
		Conditions	V _{IN} =7V, I _o =0.1A, V _C =2V, f=100 to 120Hz, V _O =5V			
Overcurrent Protection Starting Current ^{*3}		I _{S1}	1.1			A
		Conditions	V _{IN} =7V, V _C =2V			
V _C Terminal	Control Voltage (Output ON) ^{*4}	V _C , I _H	2			V
		Conditions	V _{IN} =7V			
	Control Voltage (Output OFF)	V _C , I _L			0.8	V
		Conditions	V _{IN} =7V			
	Control Current (Output ON)	I _C , I _H			40	μA
		Conditions	V _{IN} =7V, V _C =2V			
Control Current (Output OFF)	I _C , I _L	−5	0		μA	
	Conditions	V _{IN} =7V, V _C =0V				
Input Overvoltage Shutdown Voltage		V _{OVP}	33			V
		Conditions	I _o =0.01A			


*3: I_{S1} is specified at the 5% drop point of output voltage V_o on the condition that V_{IN} = overcurrent protection starting current, I_o = 10 mA.

*4: Output is OFF when the output control terminal V_c is open. Each input level is equivalent to LS-TTL level. Therefore, the device can be driven directly by LS-TTLs.


*5: SI-3000KFE cannot be used in the following applications because the built-in foldback-type overcurrent protection may cause errors during start-up stage.

(1) Constant current load (2) Positive and negative power supply (3) Series-connected power supply (4) V_o adjustment by raising ground voltage


Block Diagram

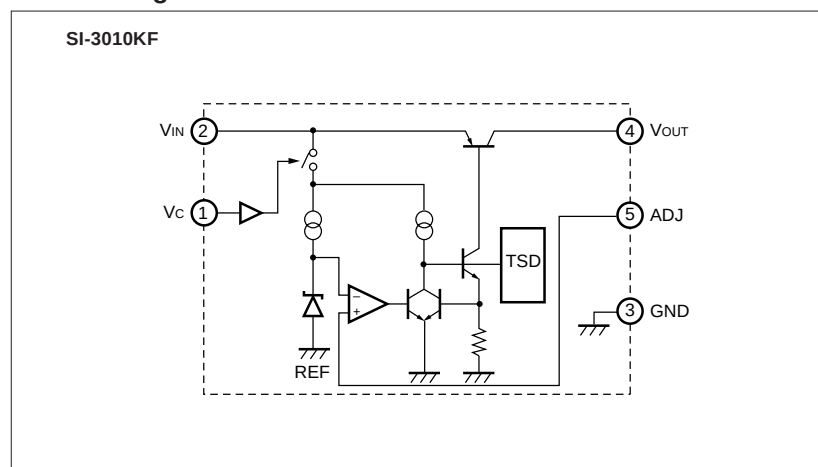

Ta-PD Characteristics

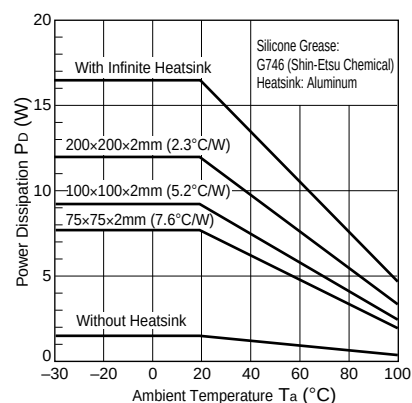


Typical Connection Diagram

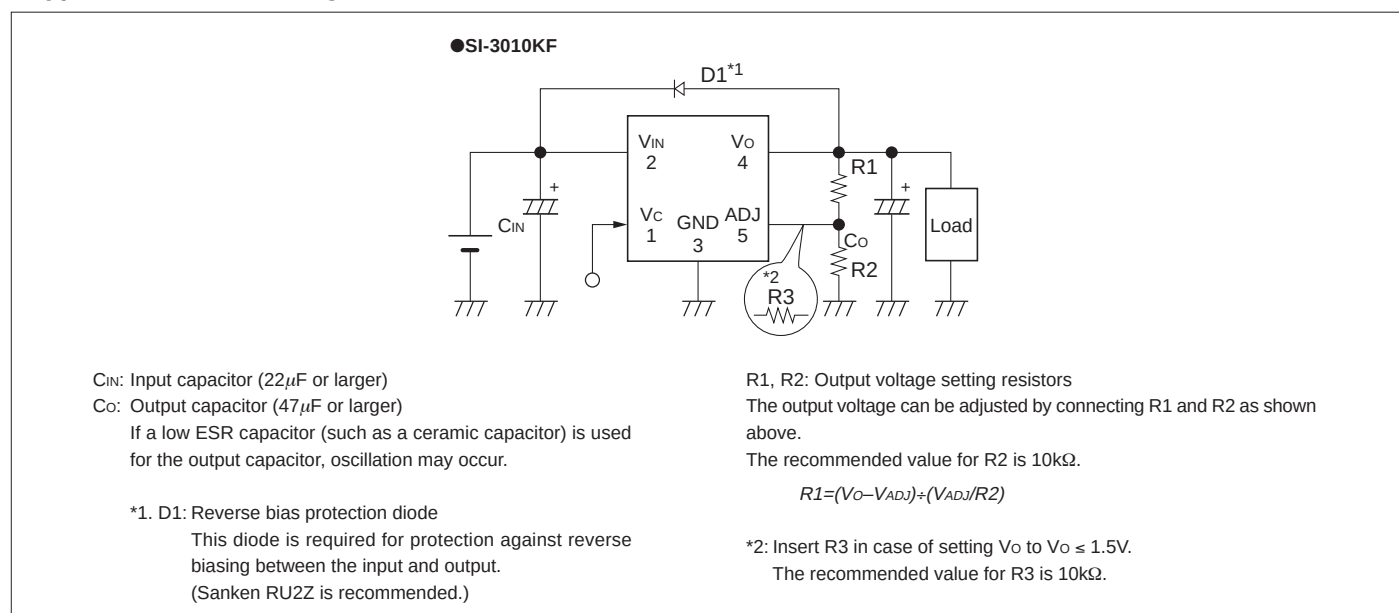

External Dimensions (TO220F-5)

(Unit : mm)

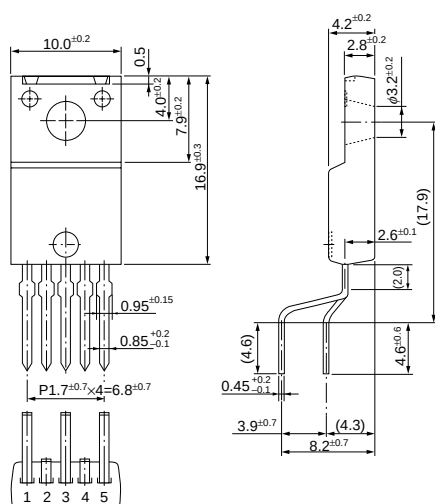

Pin Assignment

- ① V_c
- ② V_{IN}
- ③ GND
- ④ V_{out}
- ⑤ ADJ

Plastic Mold Package Type

Flammability: UL 94V-0

Product Mass: Approx. 2.3 g