

## Two-Channel SATA 6-Gb/s Redriver

Check for Samples: [SN75LVCP601](#)

### FEATURES

- 1.5-, 3-, or 6-Gbps Two-Channel Redriver
- Integrated Output Squelch
- Programmable Rx/Tx Equalization and De-Emphasis Width Control
- Power-Save Feature Lowers Power by >80% in Auto Low-Power Mode
- Low Power
  - <220 mW Typ.
  - <50 mW (in Auto Low-Power Mode)
  - <5 mW (in Standby Mode)
- Excellent Jitter and Loss Compensation Capability to Over 24-Inch (61-cm) FR4 Trace
- 20-Pin 4-mm × 4-mm QFN Package
- High Protection Against ESD Transient
  - HBM: 10,000 V
  - CDM: 1,500 V
  - MM: 200 V
- Pin-Compatible to LVCP412A and MAX4951

### APPLICATIONS

- Notebooks, Desktops, Docking Stations, Servers, and Workstations

### DESCRIPTION

The SN75LVCP601 is a dual-channel, single-lane SATA redriver and signal conditioner supporting data rates up to 6 Gbps. The device complies with SATA physical link 2m and 3i specifications. The SN75LVCP601 operates from a single 3.3-V supply and has 100-Ω line termination with a self-biasing feature, making the device suitable for ac coupling. The inputs incorporate an out-of-band (OOB) detector, which automatically squelches the output while maintaining a stable common-mode voltage compliant to the SATA link. The device design also handles spread-spectrum clocking (SSC) transmission per the SATA specification.

The SN75LVCP601 handles interconnect losses at both its input and output. The input stage of each channel offers selectable equalization settings that are programmable to match the loss in the channel. The differential outputs provide selectable de-emphasis to compensate for the expected distortion that the SATA signal experiences. The level of equalization and de-emphasis settings depends on the length of interconnect and its characteristics. The setting of signal control pins EQ1, EQ2, DE1, and DE2 controls both equalization and de-emphasis levels.

The device is hot-plug capable (requires the use of ac-coupling capacitors at differential inputs and outputs), preventing device damage under device *hot*-insertion, such as async signal plug or removal, unpowered plug or removal, powered plug or removal, or surprise plug or removal.

### ORDERING INFORMATION<sup>(1)</sup>

PART NUMBER	PART MARKING	PACKAGE
SN75LVCP601RTJR	LVC601	20-pin RTJ, reel (large)
SN75LVCP601RTJT	LVC601	20-pin RTJ, reel (small)

(1) For the most-current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI Web site at [www.ti.com](http://www.ti.com).



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of the Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 2010–2013, Texas Instruments Incorporated



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.


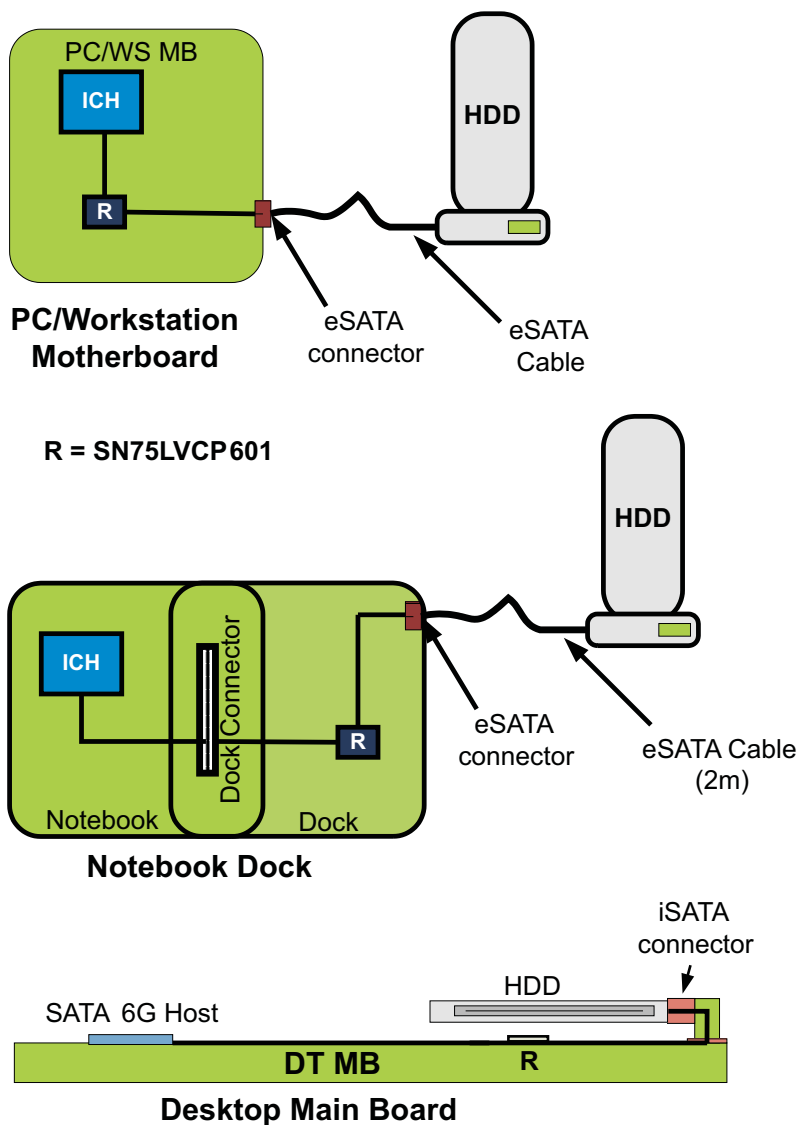


Figure 1. Typical Application

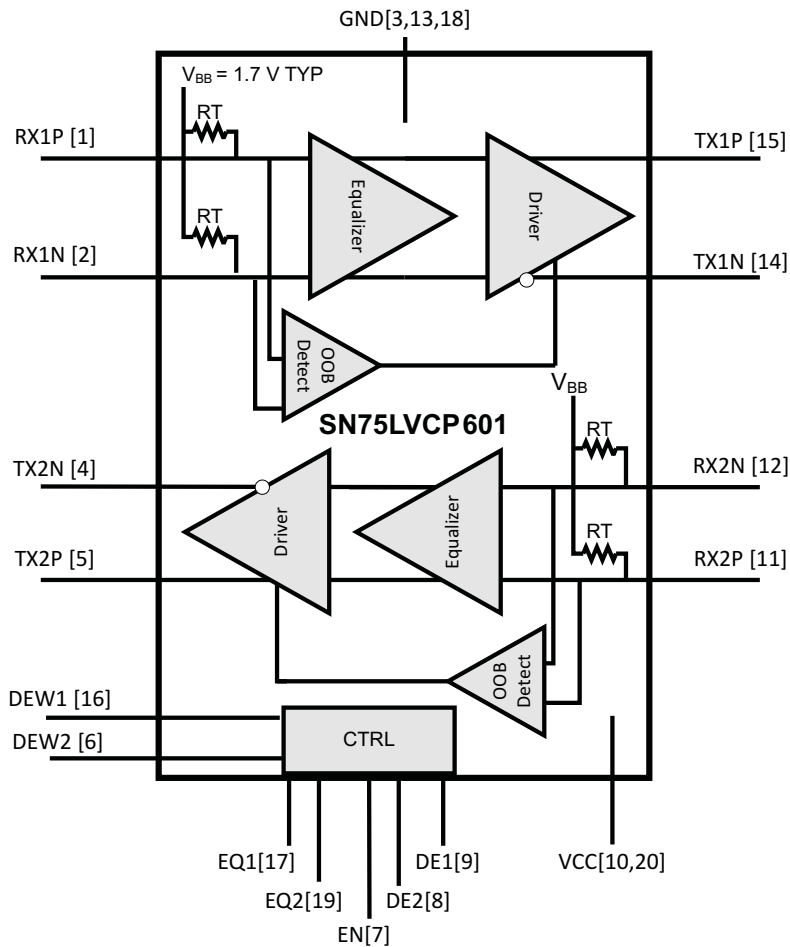

**Figure 2. Data Flow Block Diagram**


**PIN TABLE**

NAME	PIN	DESCRIPTION	NAME	PIN	DESCRIPTION
RX1P	1	Input 1, non-inverting	RX2P	11	Input 2, non-inverting
RX1N	2	Input 1, inverting	RX2N	12	Input 2, inverting
GND	3	Ground	GND	13	Ground
TX2N	4	Output 2, inverting	TX1N	14	Output 1, inverting
TX2P	5	Output 2, non-inverting	TX1P	15	Output 1, non-inverting
DEW2 <sup>(1)</sup>	6	De-emphasis width cntrl.-CH 2	DEW1 <sup>(1)</sup>	16	De-emphasis width cntrl.-CH 1
EN <sup>(1)</sup>	7	Enable	EQ1 <sup>(2)</sup>	17	EQ control CH 1
DE2 <sup>(2)</sup>	8	De-emphasis CH2	GND	18	Ground
DE1 <sup>(2)</sup>	9	De-emphasis CH1	EQ2 <sup>(2)</sup>	19	EQ control CH 2
Vcc	10	3.3-V supply	Vcc	20	3.3-V supply

(1) DEW1, DEW2, and EN tied to Vcc via internal PU resistor

(2) DE1, DE2, EQ1, EQ2 connect to Vcc / 2 via internal resistor

## PACKAGE PINOUT

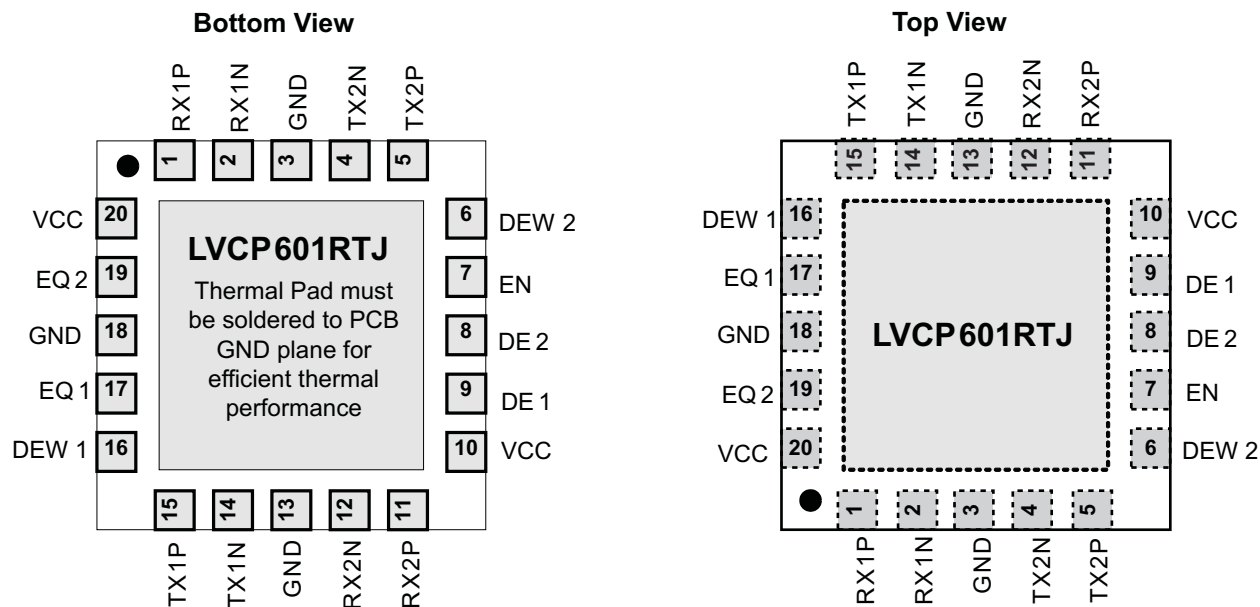

## PIN FUNCTIONS

PIN		PIN TYPE	DESCRIPTION
NO.	NAME		
HIGH-SPEED DIFFERENTIAL I/O			
2	RX1N	I, CML	Non-inverting and inverting CML differential input for CH 1 and CH 2. These pins connect to an internal voltage bias via a dual-termination resistor circuit.
1	RX1P	I, CML	
12	RX2N	I, CML	
11	RX2P	I, CML	
14	TX1N	O, VML	Non-inverting and inverting VML differential output for CH 1 and CH 2. These pins connect internally to voltage bias via termination resistors.
15	TX1P	O, VML	
4	TX2N	O, VML	
5	TX2P	O, VML	
CONTROL PINS			
7	EN	I, LVCMOS	Device enable/disable pin, internally pulled to V <sub>CC</sub> . See <a href="#">Table 2</a> .
8, 9	DE1, DE2 <sup>(1)</sup>	I, LVCMOS	Selects de-emphasis settings for CH 1 and CH 2 per <a href="#">Table 1</a> . Internally tied to V <sub>CC</sub> / 2
17, 19	EQ1, EQ2 <sup>(1)</sup>	I, LVCMOS	Selects equalization settings for CH 1 and CH 2 per <a href="#">Table 1</a> . Internally tied to V <sub>CC</sub> / 2
16, 6	DEW1, DEW2	I, LVCMOS	De-emphasis width control for CH 1 and CH 2. See <a href="#">Table 2</a> .
POWER			
10, 20	Vcc	Power	Positive supply should be 3.3 V ± 10%.
3, 13, 18	GND	Power	Supply ground


- (1) Internally biased to V<sub>cc</sub>/2 with >200-kΩ pullup/pulldown. When 3-state pins are left as NC, board leakage at the pin pad must be <1 μA; otherwise, drive to V<sub>cc</sub>/2 to assert mid-level state.

**Table 1. Tx/Rx EQ and DE Pulse-Duration Settings**


DE1 or DE2	CH1 or CH2 De-Emphasis dB (at 6Gbps)	EQ1 or EQ2	CH1 or CH2 Equalization dB (at 6Gbps)
NC ( <i>default</i> )	–4	NC ( <i>default</i> )	0
0	0	0	7
1	–2	1	14
DEW1 or DEW2	Device Function → DE Width for CH1/CH2		
0	De-emphasis pulse duration, short		
1 ( <i>default</i> )	De-emphasis pulse duration, long		

**Table 2. Control Pin Settings**

EN	Device Function → Standby Mode
0	Device in standby mode
1 ( <i>default</i> )	Device enabled

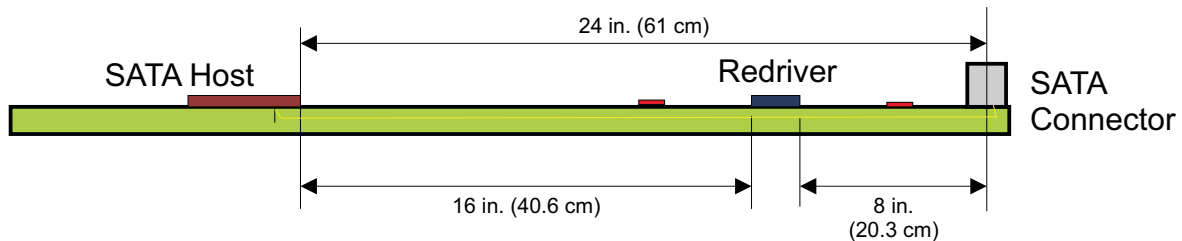

### Redriver on Motherboard

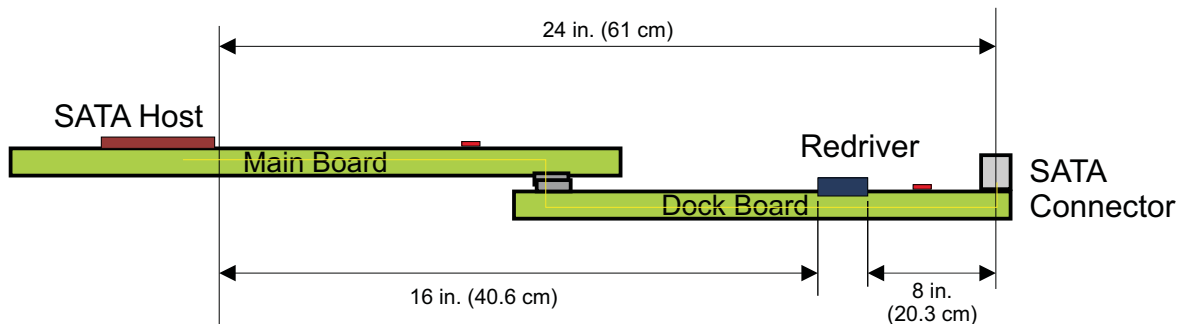


### Redriver on Dock Board

NOTE: \*Suggested trace-length values are values based on TI spice simulations (done over programmable limits of input EQ and output de-emphasis) to meet SATA loss and jitter spec.

Actual trace length supported by the LVCP601 may be more or less than suggested values and depends on board layout, trace widths, and number of connectors used in the SATA signal path.

**Figure 3. Trace Length Example\* for LVCP601**

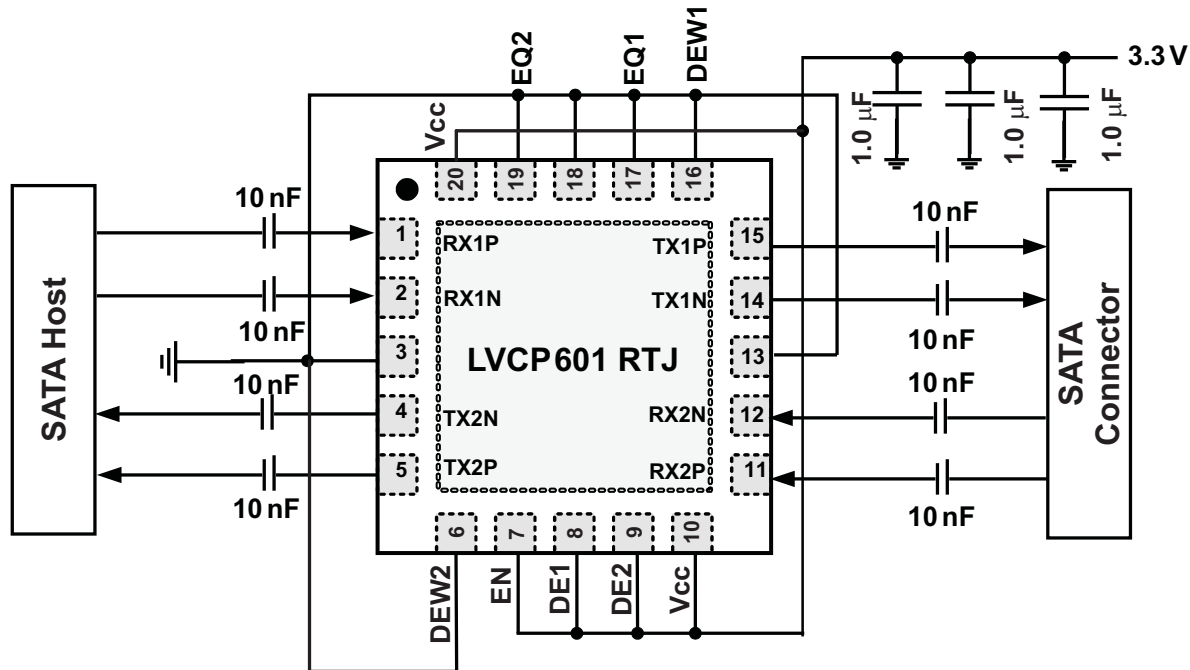

- (1) Place supply capacitors close to device pin.
- (2) With no external control is implemented, one can leave EN open or tie it to the supply .
- (3) Output de-emphasis setting is for –2 dB, EQ for 7 dB, and DE duration for SATA I/II/III operation for both channels.
- (4) Actual EQ/DE duration settings depend on device placement relative to host and SATA connector.

**Figure 4. Typical Device Implementation**

## OPERATION DESCRIPTION

### INPUT EQUALIZATION

Each differential input of the SN75LVCP601 has programmable equalization in its front stage. [Table 1](#) shows the equalization. The input equalizer design recovers a signal even when no eye is present at the receiver, and effectively supports FR4 trace at the input anywhere from 4 in. (10.2 cm) to 20 in. (50.8 cm) at SATA 6G speed.

### OUTPUT DE-EMPHASIS

The SN75LVCP601 provides the de-emphasis settings shown in [Table 1](#). De-emphasis control is independent for each channel, controlled by the DE1 and DE2 pin settings as shown in [Table 1](#). The reference for the de-emphasis settings available in the device is the transition bit amplitude for each given configuration; this transition bit amplitude is different at 0 dB than the –2-dB and –4-dB settings by design. DEW1 and DEW2 control the DE durations for channels one and two, respectively. [Table 1](#) lists the recommended settings for these control pins. Output de-emphasis is capable of supporting FR4 trace at the output anywhere from 2 in. (5.1 cm) to 12 in. (30.5 cm) at SATA 3G/6G speed.

### LOW-POWER MODE

There are two low-power modes supported by the SN75LVCP601, listed as follows:

1. Standby mode (triggered by the EN pin, EN = 0 V)
  - The enable (EN) pin controls the low-power mode. Pulling this pin LOW puts the device in standby mode within 2 µs (max). In this mode, the device drives all its active components to their quiescent level, and differential outputs Hi-Z (open). Maximum power dissipation in this mode is 5 mW. Exiting from this mode to normal operation requires a maximum latency of 5 µs.
2. Auto low-power mode (triggered when a given channel is in the electrically idle state for more than 100 µs and EN = Vcc)

- The device enters and exits low-power mode by actively monitoring the input signal (VIDp-p) level on each of its channels independently. When the input signal on either or both channels is in the electrically idle state, that is, VIDp-p < 50 mV and stays in this state for >100  $\mu$ s, the associated channel enters into the low-power state. In this state, output of the associated channel goes to VCM and the device selectively shuts off some circuitry to lower power by >80% of its normal operating power. Exit time from the auto low-power mode is <50 ns.

## Out-of-Band (OOB) SUPPORT

The squelch detector circuit within the device enables full detection of OOB signaling as specified in the SATA specification. The device does not detect differential signal amplitude at the receiver input of 50 mVpp or less an activity, and hence does not passed it to the output. The device detects differential signal amplitude of 150 mVp-p or more as an activity and therefore passes it to the output, providing an indication of the activity. Squelch circuit ON or OFF time is 5 ns, maximum. While in squelch mode, outputs are held to VCM.

## DEVICE POWER

The design of SN75LVCP601 is for operation from a single 3.3-V supply. Always practice proper power-supply sequencing procedure. Apply Vcc first, before application of any input signals to the device. The power-down sequence is in reverse order.

## ABSOLUTE MAXIMUM RATINGS

over operating free-air temperature range (unless otherwise noted) <sup>(1)</sup>

		VALUE	UNIT
Supply voltage range <sup>(2)</sup>	V <sub>CC</sub>	–0.5 to 4	V
Voltage range	Differential I/O	–0.5 to 4	V
	Control I/O	–0.5 to V <sub>CC</sub> + 0.5	V
Electrostatic discharge	Human-body model <sup>(3)</sup>	±10,000	V
	Charged-device model <sup>(4)</sup>	±1500	V
	Machine model <sup>(5)</sup>	±200	V
Continuous power dissipation		See Thermal Table	

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any conditions beyond those indicated under *Recommended Operating Conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) All voltage values, except differential voltages, are with respect to the network ground terminal.
- (3) Tested in accordance with JEDEC Standard 22, Test Method A114-B.
- (4) Tested in accordance with JEDEC Standard 22, Test Method C101-A.
- (5) Tested in accordance with JEDEC Standard 22, Test Method A115-A.

## THERMAL INFORMATION

THERMAL METRIC <sup>(1)</sup>		SN75LVCP601	UNITS
		QFN	
		20 PINS	
$\theta_{JA}$	Junction-to-ambient thermal resistance <sup>(2)</sup>	38	°C/W
$\theta_{JCTop}$	Junction-to-case (top) thermal resistance <sup>(3)</sup>	40	°C/W
$\theta_{JB}$	Junction-to-board thermal resistance <sup>(4)</sup>	10	°C/W
$\psi_{JT}$	Junction-to-top characterization parameter <sup>(5)</sup>	0.5	°C/W

- (1) For more information about traditional and new thermal metrics, see the *IC Package Thermal Metrics* application report, [SPRA953](#).
- (2) The junction-to-ambient thermal resistance under natural convection is obtained in a simulation on a JEDEC-standard, high-K board, as specified in JESD51-7, in an environment described in JESD51-2a.
- (3) The junction-to-case (top) thermal resistance is obtained by simulating a cold plate test on the package top. No specific JEDEC-standard test exists, but a close description can be found in the ANSI SEMI standard G30-88.
- (4) The junction-to-board thermal resistance is obtained by simulating in an environment with a ring cold plate fixture to control the PCB temperature, as described in JESD51-8.
- (5) The junction-to-top characterization parameter,  $\psi_{JT}$ , estimates the junction temperature of a device in a real system and is extracted from the simulation data for obtaining  $\theta_{JA}$ , using a procedure described in JESD51-2a (sections 6 and 7).

**THERMAL INFORMATION (continued)**

THERMAL METRIC <sup>(1)</sup>		SN75LVCP601	UNITS
		QFN	
		20 PINS	
$\Psi_{JB}$	Junction-to-board characterization parameter <sup>(6)</sup>	0.9	°C/W
$\theta_{JCbott}$	Junction-to-case (bottom) thermal resistance <sup>(7)</sup>	15.2	°C/W
$P_D$	Device power dissipation in active mode	215 to 288	mW
$P_{SD}$	Device power dissipation under standby mode	5	mW

- (6) The junction-to-board characterization parameter,  $\Psi_{JB}$ , estimates the junction temperature of a device in a real system and is extracted from the simulation data for obtaining  $\theta_{JA}$ , using a procedure described in JESD51-2a (sections 6 and 7).
- (7) The junction-to-case (bottom) thermal resistance is obtained by simulating a cold plate test on the exposed (power) pad. No specific JEDEC standard test exists, but a close description can be found in the ANSI SEMI standard G30-88.

**RECOMMENDED OPERATING CONDITIONS**

(Typical values for all parameters are at  $V_{CC} = 3.3V$  and  $T_A = 25^\circ C$ . All temp limits are specified by design)

PARAMETER		CONDITIONS	MIN	TYP	MAX	UNITS
$V_{CC}$	Supply voltage		3	3.3	3.6	V
$C_{COUPLING}$	Coupling capacitor			12		nF
	Operating free-air temperature		0		85	°C

**ELECTRICAL CHARACTERISTICS**

over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
<b>DEVICE PARAMETERS</b>						
$P_D$	Power dissipation in active mode	DEWx = EN = V <sub>CC</sub> , EQx = DEx = NC, K28.5 pattern at 6 Gbps, V <sub>ID</sub> = 700 mV <sub>p-p</sub>		215	288	mW
$P_{SD}$	Power dissipation in standby mode	EN = 0 V, DEWx = EQx = DEx = NC, K28.5 pattern at 6 Gbps, V <sub>ID</sub> = 700 mV <sub>p-p</sub>			5	mW
$I_{CC}$	Active-mode supply current	EN = 3.3 V, DEWx = 0 V, EQx = DEx = NC, K28.5 pattern at 6 Gbps, V <sub>ID</sub> = 700 mV <sub>p-p</sub>		65	80	mA
$I_{CC\_ALP}$	Active power-save mode $I_{CC}$	When device is enabled and auto low-power conditions are met		6.5	10	mA
$I_{CC\_STDBY}$	Standby mode supply current	EN = 0 V			1	mA
	Maximum data rate			1	6	Gbps
$t_{PDelay}$	Propagation delay	Measured using K28.5 pattern. See Figure 8.		323	400	ps
AutoLP <sub>ENTRY</sub>	Auto low-power entry time	Electrical idle at input; see Figure 9.	80	105	130	μs
AutoLP <sub>EXIT</sub>	Auto low-power exit time	After first signal activity; see Figure 9.		42	50	ns
$t_{ENB}$	Device enable time	EN 0 → 1			5	μs
$t_{DIS}$	Device disable time	EN 1 → 0			2	μs



## ELECTRICAL CHARACTERISTICS (continued)

over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
OUT-OF-BAND (OOB)						
V <sub>OOB</sub>	Input OOB threshold	f = 750 MHz	50	78	150	mVpp
D <sub>VdiffOOB</sub>	OOB differential delta				25	mV
D <sub>VCMOOB</sub>	OOB common-mode delta				50	mV
t <sub>OOB1</sub>	OOB mode enter	See <a href="#">Figure 9</a> .		3	5	ns
t <sub>OOB2</sub>	OOB mode exit			3	5	ns
CONTROL LOGIC						
V <sub>IH</sub>	Input high voltage	For all control pins	1.4			V
V <sub>IL</sub>	Input low voltage				0.5	V
V <sub>INHYS</sub>	Input hysteresis			115		mV
I <sub>IH</sub>	High-level input current	EQx, DEx = Vcc			30	μA
		EN, DEWx = Vcc			1	
I <sub>IL</sub>	Low-level input current	EQx, DEx = GND	−30			μA
		EN, DEWx = GND	−10			
RECEIVER AC/DC						
Z <sub>DIFFRX</sub>	Differential-input impedance		85	100	115	Ω
Z <sub>SERX</sub>	Single-ended input impedance		40			Ω
V <sub>CMRX</sub>	Common-mode voltage			1.8		V
R <sub>LDiffRX</sub>	Differential-mode return loss (RL)	f = 150 MHz–300 MHz	18	28		dB
		f = 300 MHz–600 MHz	14	17		
		f = 600 MHz–1.2 GHz	10	12		
		f = 1.2 GHz–2.4 GHz	8	9		
		f = 2.4 GHz–3 GHz	3	9		
R <sub>XDiffRLSlope</sub>	Differential-mode RL slope	f = 300 MHz–6 GHz (See <a href="#">Figure 5</a> .)		−13		dB/dec
R <sub>LCMRX</sub>	Common-mode return loss	f = 150 MHz–300 MHz	5	10		dB
		f = 300 MHz–600 MHz	5	17		
		f = 600 MHz–1.2 GHz	2	23		
		f = 1.2 GHz–2.4 GHz	1	16		
		f = 2.4 GHz–3 GHz	1	12		
V <sub>diffRX</sub>	Differential input voltage PP	f = 1.5 GHz and 3 GHz	120		1600	mVppd
I <sub>B<sub>RX</sub></sub>	Impedance balance	f = 150 MHz–300 MHz	30	41		dB
		f = 300 MHz–600 MHz	30	38		
		f = 600 MHz–1.2 GHz	20	32		
		f = 1.2 GHz–2.4 GHz	10	26		
		f = 2.4 GHz–3 GHz	10	25		
		f = 3 GHz–5 GHz	4	20		
		f = 5 GHz–6.5 GHz	4	17		
t <sub>20-80RX</sub>	Rise/fall time	Rise times and fall times measured between 20% and 80% of the signal. SATA 6-Gbps speed measured 1 in, (2.5 cm) from device pin	62		75	ps
t <sub>skewRX</sub>	Differential skew	Difference between the single-ended midpoint of the RX+ signal rising or falling edge, and the single-ended midpoint of the RX− signal falling or rising edge			30	ps

**ELECTRICAL CHARACTERISTICS (continued)**

over operating free-air temperature range (unless otherwise noted)


PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
<b>TRANSMITTER AC/DC</b>						
$Z_{diffTX}$	Pair differential impedance		85	100	122	$\Omega$
$Z_{SETX}$	Single-ended impedance		40			$\Omega$
$V_{TXtrans}$	Sequencing transient voltage	Transient voltages on the serial data bus during power sequencing (lab load)	–1.2		1.2	V
$RL_{DiffTX}$	Differential-mode return loss	$f = 150\text{ MHz} - 300\text{ MHz}$	14	24		dB
		$f = 300\text{ MHz} - 600\text{ MHz}$	8	19		
		$f = 600\text{ MHz} - 1.2\text{ GHz}$	6	14		
		$f = 1.2\text{ GHz} - 2.4\text{ GHz}$	6	10		
		$f = 2.4\text{ GHz} - 3\text{ GHz}$	3	10		
$TX_{DiffRLSlope}$	Differential-mode RL slope	$f = 300\text{ MHz} - 3\text{ GHz}$ (See <a href="#">Figure 5.</a> )		–13		dB/dec
$RL_{CMTX}$	Common-mode return loss	$f = 150\text{ MHz} - 300\text{ MHz}$	5	20		dB
		$f = 300\text{ MHz} - 600\text{ MHz}$	5	19		
		$f = 600\text{ MHz} - 1.2\text{ GHz}$	2	17		
		$f = 1.2\text{ GHz} - 2.4\text{ GHz}$	1	12		
		$f = 2.4\text{ GHz} - 3.0\text{ GHz}$	1	11		
$IB_{TX}$	Impedance balance	$f = 150\text{ MHz} - 300\text{ MHz}$	30	41		dB
		$f = 300\text{ MHz} - 600\text{ MHz}$	30	38		
		$f = 600\text{ MHz} - 1.2\text{ GHz}$	20	33		
		$f = 1.2\text{ GHz} - 2.4\text{ GHz}$	10	24		
		$f = 2.4\text{ GHz} - 3\text{ GHz}$	10	26		
		$f = 3\text{ GHz} - 5\text{ GHz}$	4	22		
		$f = 5\text{ GHz} - 6.5\text{ GHz}$	4	21		
DE	Output de-emphasis (relative to transition bit)	$f = 3\text{ GHz}$ , DE1 or DE2 = 0		0		dB
		$f = 3\text{ GHz}$ , DE1 or DE2 = 1		–2		
		$f = 3\text{ GHz}$ , DE1 or DE2 = NC		–4		
$Diff_{VppTX\_DE}$	Differential output-voltage swing dc level	$f = 3\text{ GHz}$ , DE1 or DE2 = 0		550		mV
		$f = 3\text{ GHz}$ , DE1 or DE2 = 1		830		
		$f = 3\text{ GHz}$ , DE1 or DE2 = NC		630		
$t_{DE}$	De-emphasis duration	DEW1 or DEW2 = 0		94		ps
		DEW1 or DEW2 = 1		215		
$VCM_{AC\_TX}$	TX AC CM voltage	At 1.5 GHz		20	50	mVppd
		At 3 GHz		12	26	dBmV (rms)
		At 6 GHz		13	30	
$VCM_{TX}$	Common-mode voltage			1.8		V
$t_{20-80TX}$	Rise/fall time	Rise times and fall times measured between 20% and 80% of the signal. At 6Gbps under no load conditions	42	55	75	ps
$t_{skewTX}$	Differential skew	Difference between the single-ended mid-point of the TX+ signal rising or falling edge, and the single-ended mid-point of the TX- signal falling or rising edge.		6	20	ps
$TxR/F_{imb}$	TX rise-fall imbalance	At 3 Gbps		6%	20%	
$TxAmp_{imb}$	TX amplitude imbalance			2%	10%	

## ELECTRICAL CHARACTERISTICS (continued)


over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
<b>TRANSMITTER JITTER</b>						
DJ <sub>TX</sub>	Deterministic jitter <sup>(1)</sup> at CP in Figure 6	VID = 500 mVpp, UI = 333 ps, K28.5 control character		0.06	0.19	Ulp-p
RJ <sub>TX</sub>	Residual random jitter <sup>(1)</sup>	VID = 500 mVpp, UI = 333 ps, K28.7 control character		0.01	2	ps-rms
DJ <sub>TX</sub>	Deterministic jitter <sup>(1)</sup> at CP in Figure 6	VID = 500 mVpp, UI = 167 ps, K28.5 control character		0.08	0.34	Ulp-p
RJ <sub>TX</sub>	Residual random jitter <sup>(1)</sup>	VID = 500 mVpp, UI = 167 ps, K28.7 control character		0.09	2	ps-rms

(1)  $TJ = (14.1 \times RJ_{SD} + DJ)$ , where  $RJ_{SD}$  is one standard deviation value of RJ Gaussian distribution. Jitter measurement is at the SATA connector and includes jitter generated at the package connection on the printed circuit board, and at the board interconnect as shown in Figure 6.

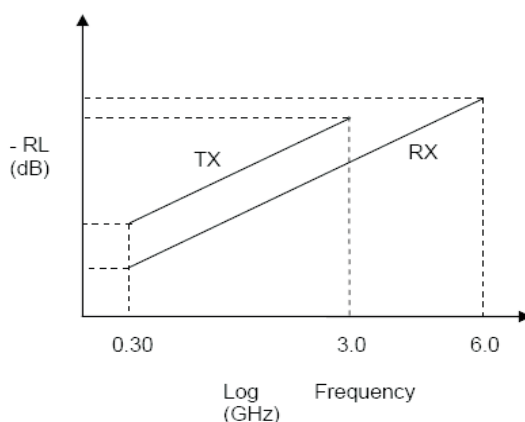

**Figure 5. TX, RX Differential Return Loss Limits**

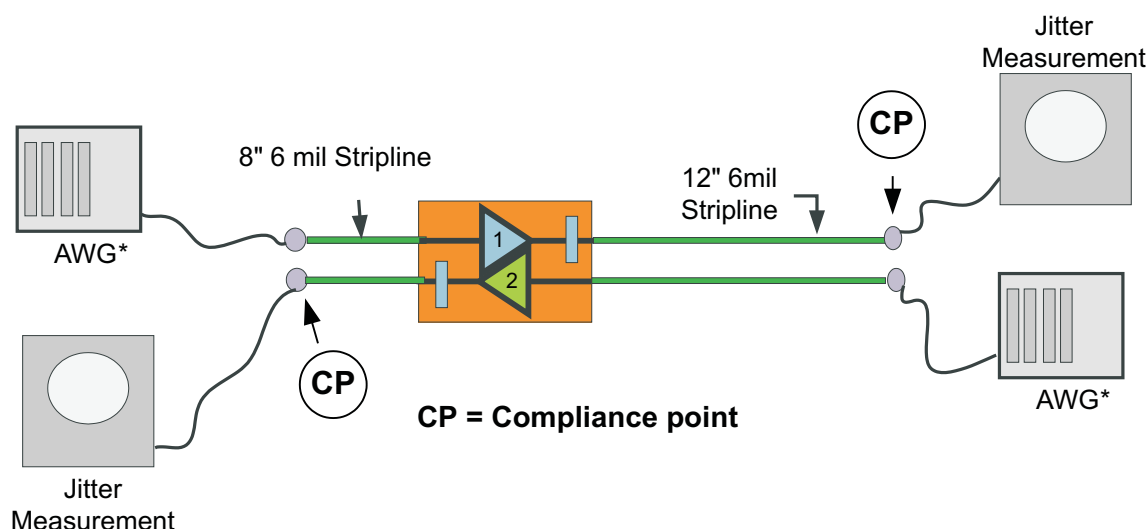

**Figure 6. Jitter Measurement Test Condition**

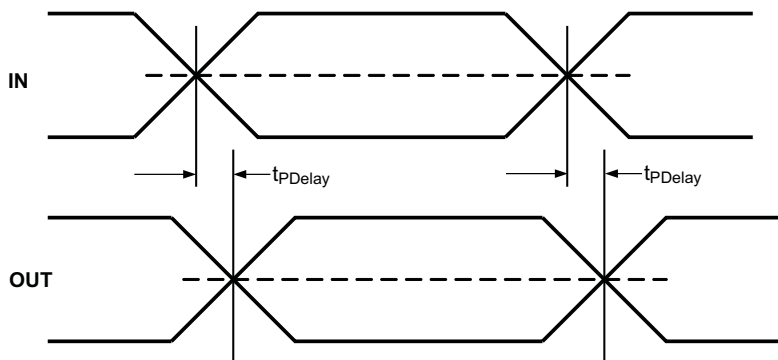


Figure 7. Propagation Delay Timing Diagram

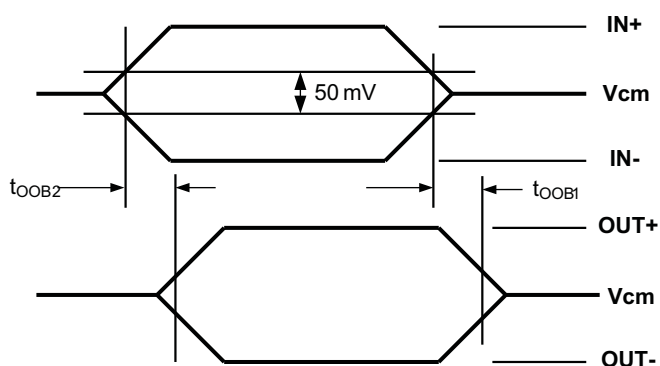


Figure 8. OOB Enter and Exit Timing

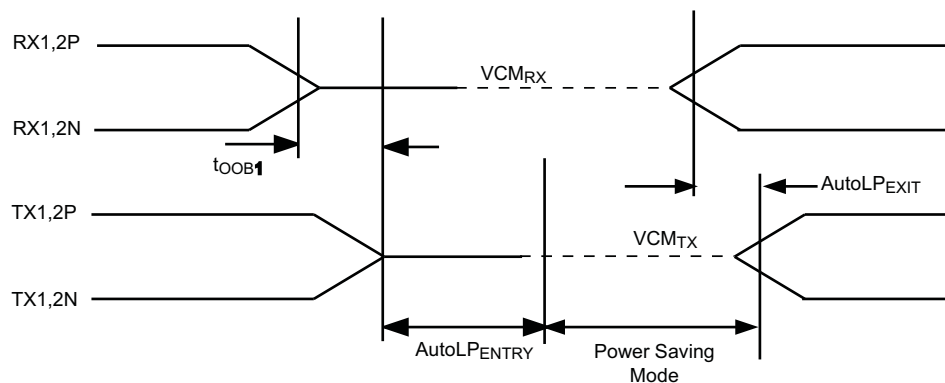


Figure 9. Auto Low-Power Mode Enter and Exit Timing


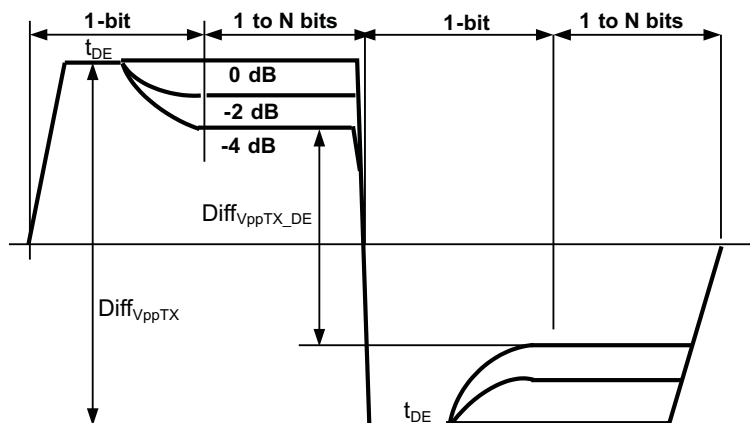


Figure 10. TX Differential Output

### SN75LVCP601 TYPICAL PERFORMANCE CURVE

- Input signal characteristics
  - Data rate = 6 Gbps, 3 Gbps, 1.5 Gbps
  - Amplitude = 500 mVp-p
  - Data pattern = K28.5
- SN75LVCP601 device setup
  - Temperature = 25°C
  - Voltage = 3.3 V
  - De-emphasis duration = 117 ps (short)
  - Equalization and de-emphasis set to optimize performance at 6 Gbps

### With LVCP601

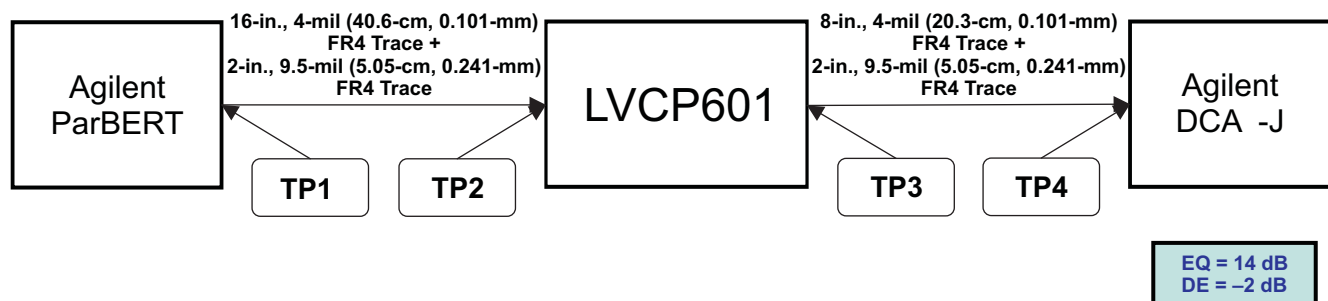

### Without LVCP601

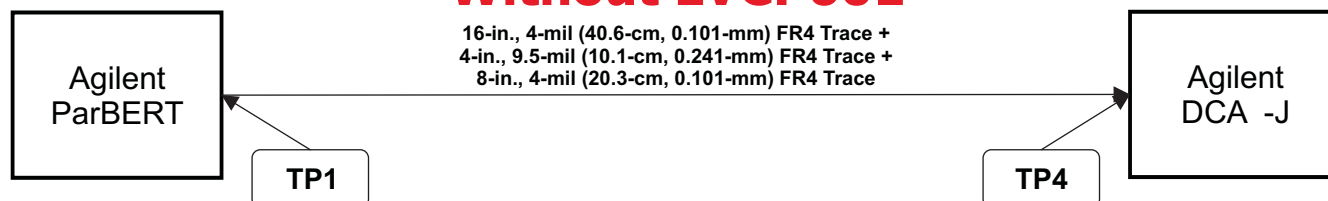












Figure 11. Performance Curve Measurement Setup

**SN75LVCP601 TYPICAL PERFORMANCE CURVE (continued)**

Test Point	TJ (1e-12) ps	DJ (δ-δ) ps	RJ (rms) ps	Eye Amplitude mV	Eye Width ps	Eye Opening mV	Eye Diagram
TP1	29.0	3.3	1.88	412.4	159.2	350.52	
TP2	91.8	65.4	1.93	240	28.9	81.24	
TP3	42.0	15.9	1.91	788.8	141.3	623.02	
TP4 <b>With</b> LVCP601	39.0	12.7	1.92	557.1	149.7	459.62	
TP4 <b>Without</b> LVCP601	56.7	29.8	2.00	165.4	101	13.24	

**Figure 12. Jitter and VOD Results: Case 1 at 6 Gbps**

Test Point	TJ (1e-12) ps	DJ (δ-δ) ps	RJ (rms) ps	Eye Amplitude mV	Eye Width ps	Eye Opening mV	Eye Diagram
TP1	29.7	3.8	1.89	430.9	326	392.84	
TP2	72.7	46.8	1.89	314.9	237	222.36	
TP3	39.6	12.8	1.96	714.5	321	611.62	
TP4 <b>With</b> LVCP601	47.9	20.3	1.99	615.3	305.0	463.42	
TP4 <b>Without</b> LVCP601	128.6	101.8	1.96	258.8	118	122.26	

**Figure 13. Jitter and VOD Results: Case 2 at 3 Gbps**

# SN75LVCP601 TYPICAL PERFORMANCE CURVE (continued)

Test Point	TJ (1e-12) ps	DJ (δ-δ) ps	RJ (rms) ps	Eye Amplitude mV	Eye Width ps	Eye Opening mV	Eye Diagram
TP1	34.3	3.4	2.26	448	659	417.28	
TP2	67.5	38.6	2.11	363.4	589	318.48	
TP3	44.9	13.2	2.31	753.1	649	604.02	
TP4 With LVCP601	57.3	21.5	2.62	672.8	632.0	442.42	
TP4 Without LVCP601	113.3	81.9	2.30	322.8	493	217.46	

Figure 14. Jitter and VOD Results: Case 3 at 1.5 Gbps

## TYPICAL CHARACTERISTICS

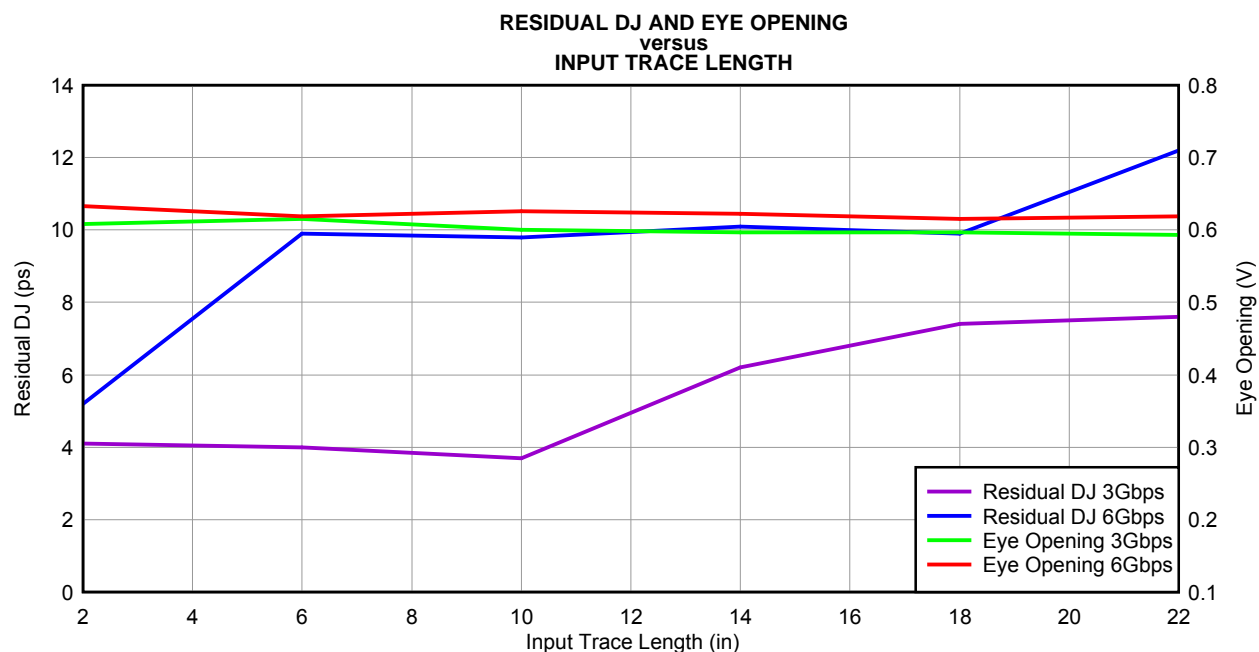


Figure 15.

G001

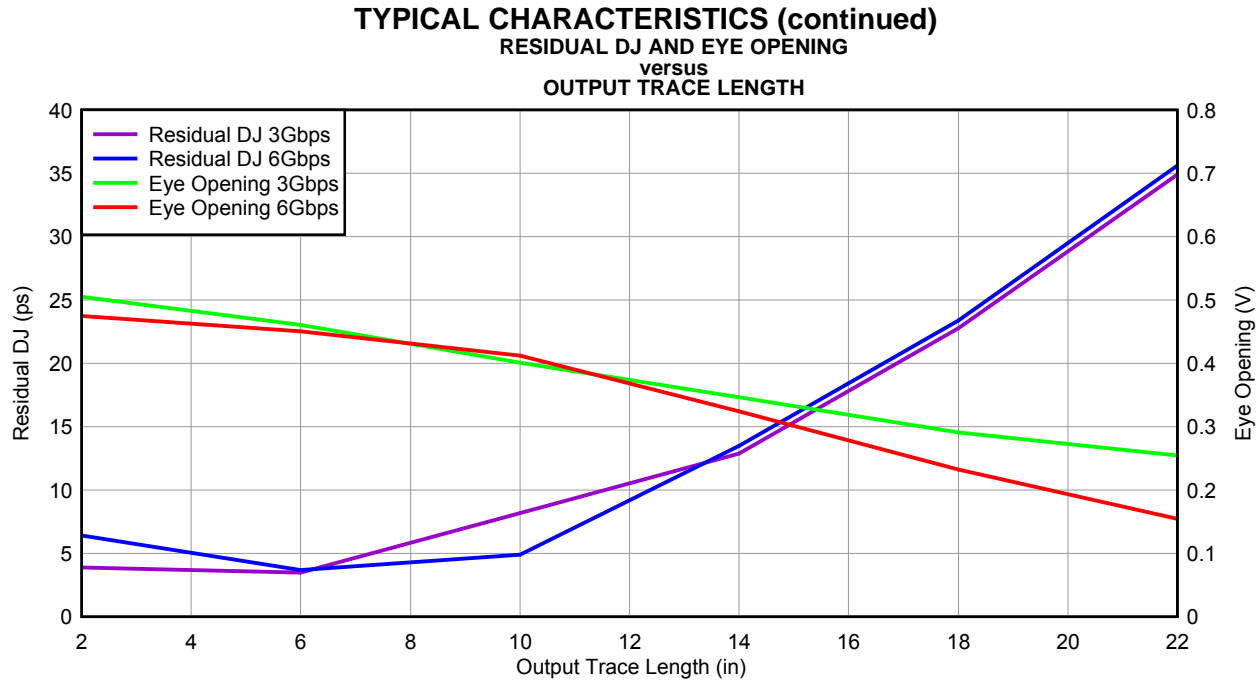


Figure 16.

G002

**REVISION HISTORY**

Changes from Revision C (October 2012) to Revision D	Page
• Corrected formatting of the Differential output-voltage swing dc level section of the Electrical Characteristics table .....	10
<hr/>	
Changes from Revision B (February 2012) to Revision C	Page
• Deleted setting recommendations on pulse durations for DEW1 and DEW2 .....	5
• Revised text of the Output Ed-Emphasis section .....	6
• Deleted Diff <sub>VppTX</sub> row .....	10
• Inserted Diff <sub>VppTX_DE</sub> row .....	10
• Changed <a href="#">Figure 10</a> caption .....	13
<hr/>	
Changes from Revision A (October 2011) to Revision B	Page
• Changed pin type from CML to VML for pins 4, 5, 14, 15 .....	4
<hr/>	
Changes from Original (June 2010) to Revision A	Page
• Changed pin EN number From: 4 To: 7 .....	4



## PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
SN75LVCP601RTJR	ACTIVE	QFN	RTJ	20	3000	Green (RoHS & no Sb/Br)	CU NIPDAU   Call TI	Level-2-260C-1 YEAR	0 to 85	LVC601	<a href="#">Samples</a>
SN75LVCP601RTJT	ACTIVE	QFN	RTJ	20	250	Green (RoHS & no Sb/Br)	CU NIPDAU   Call TI	Level-2-260C-1 YEAR	0 to 85	LVC601	<a href="#">Samples</a>

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**TAPE AND REEL INFORMATION**


\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN75LVCP601RTJR	QFN	RTJ	20	3000	330.0	12.4	4.25	4.25	1.15	8.0	12.0	Q2
SN75LVCP601RTJT	QFN	RTJ	20	250	180.0	12.4	4.25	4.25	1.15	8.0	12.0	Q2

## TAPE AND REEL BOX DIMENSIONS




\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN75LVCP601RTJR	QFN	RTJ	20	3000	367.0	367.0	35.0
SN75LVCP601RTJT	QFN	RTJ	20	250	210.0	185.0	35.0

RTJ (S-PWQFN-N20)

PLASTIC QUAD FLATPACK NO-LEAD

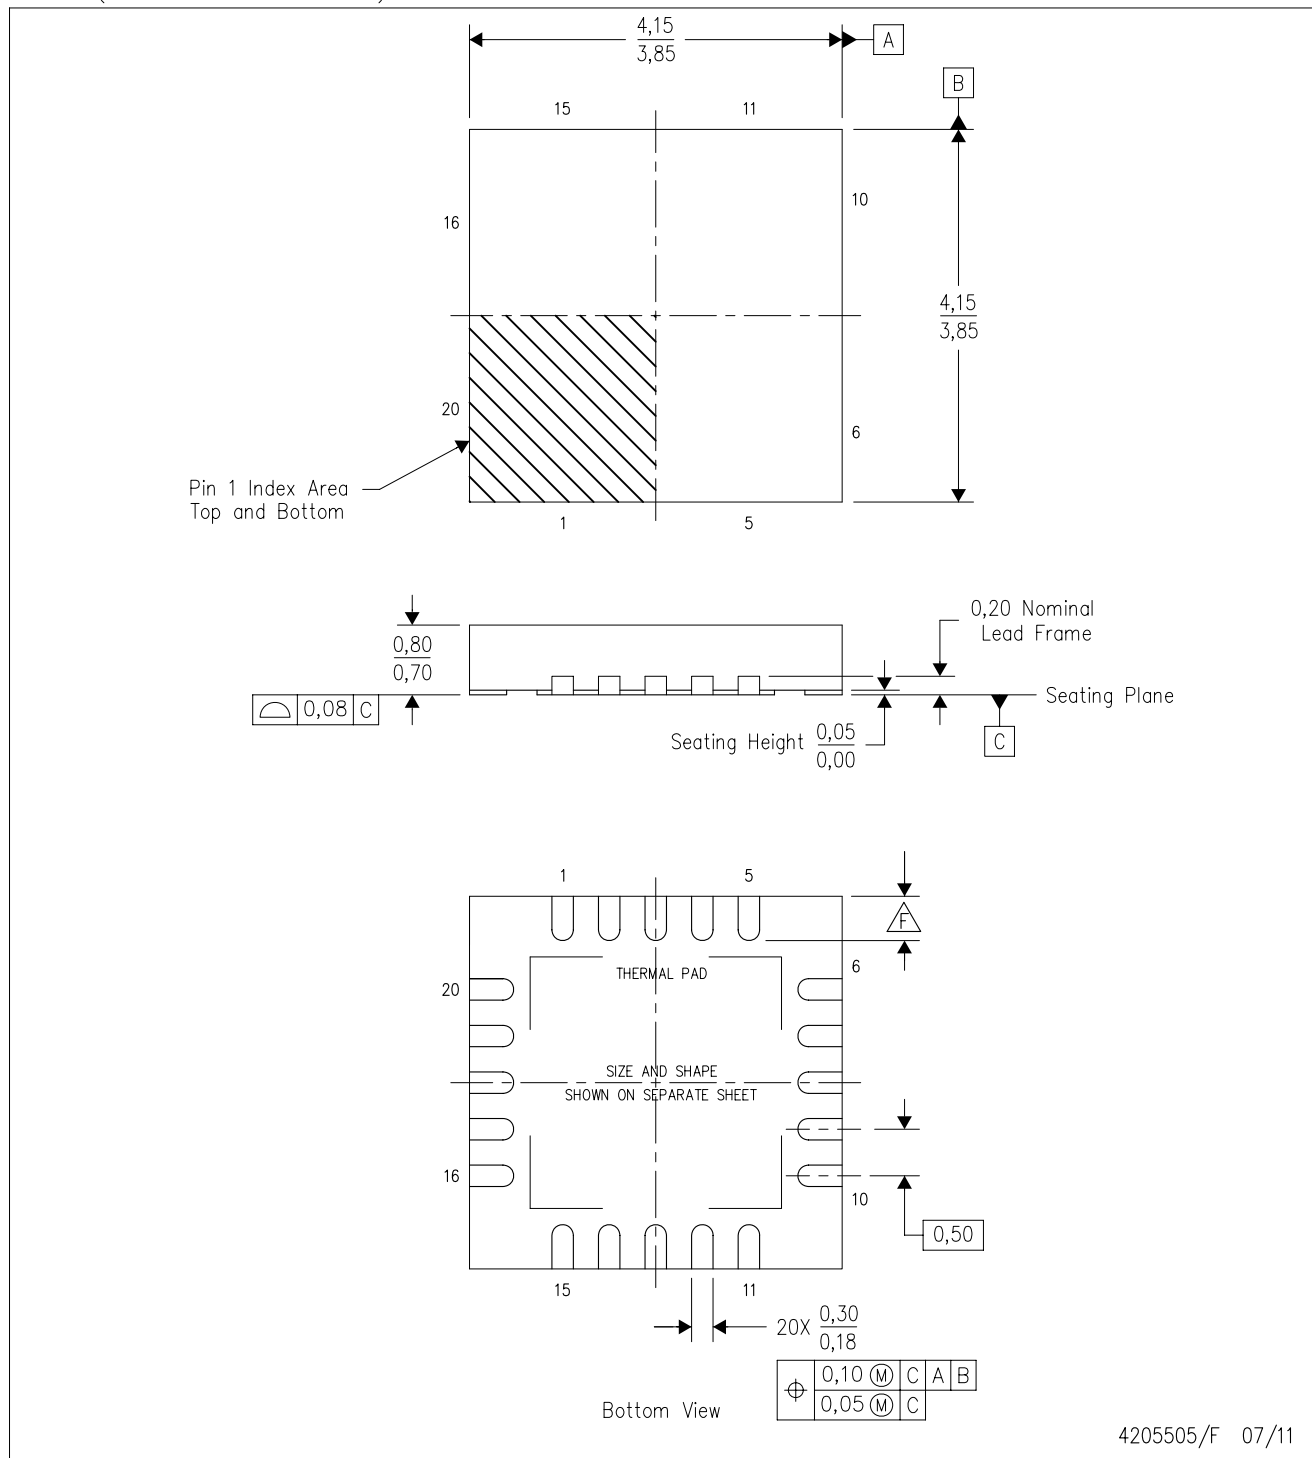

4205505/F 07/11

- NOTES:
- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5-1994.
  - B. This drawing is subject to change without notice.
  - C. QFN (Quad Flatpack No-Lead) package configuration.
  - D. The package thermal pad must be soldered to the board for thermal and mechanical performance.
  - E. See the additional figure in the Product Data Sheet for details regarding the exposed thermal pad features and dimensions.
  - △ Check thermal pad mechanical drawing in the product datasheet for nominal lead length dimensions.

RTJ (S-PWQFN-N20)


PLASTIC QUAD FLATPACK NO-LEAD

## THERMAL INFORMATION

This package incorporates an exposed thermal pad that is designed to be attached directly to an external heatsink. The thermal pad must be soldered directly to the printed circuit board (PCB). After soldering, the PCB can be used as a heatsink. In addition, through the use of thermal vias, the thermal pad can be attached directly to the appropriate copper plane shown in the electrical schematic for the device, or alternatively, can be attached to a special heatsink structure designed into the PCB. This design optimizes the heat transfer from the integrated circuit (IC).

For information on the Quad Flatpack No-Lead (QFN) package and its advantages, refer to Application Report, QFN/SON PCB Attachment, Texas Instruments Literature No. SLUA271. This document is available at [www.ti.com](http://www.ti.com).

The exposed thermal pad dimensions for this package are shown in the following illustration.

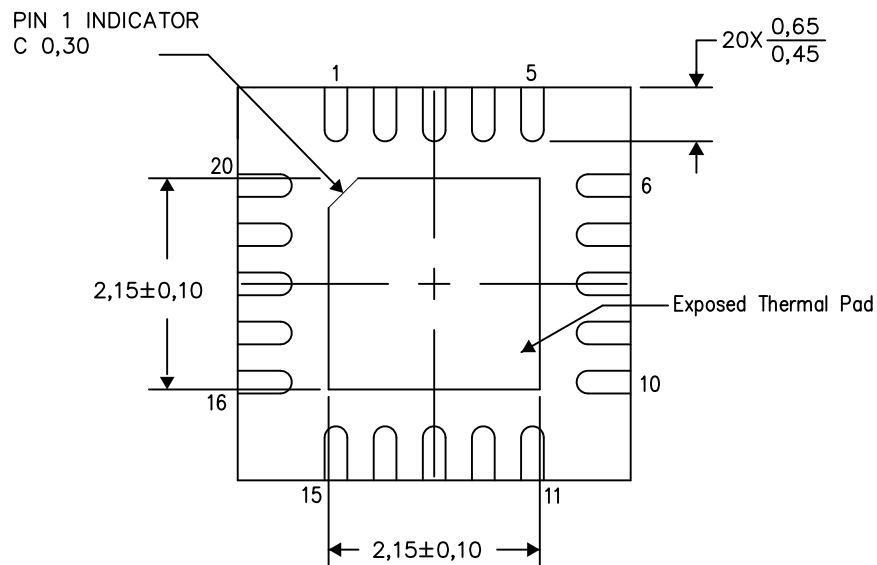

Bottom View


Exposed Thermal Pad Dimensions

4206256-3/S 08/13

NOTE: All linear dimensions are in millimeters

RTJ (S-PWQFN-N20)

PLASTIC QUAD FLATPACK NO-LEAD

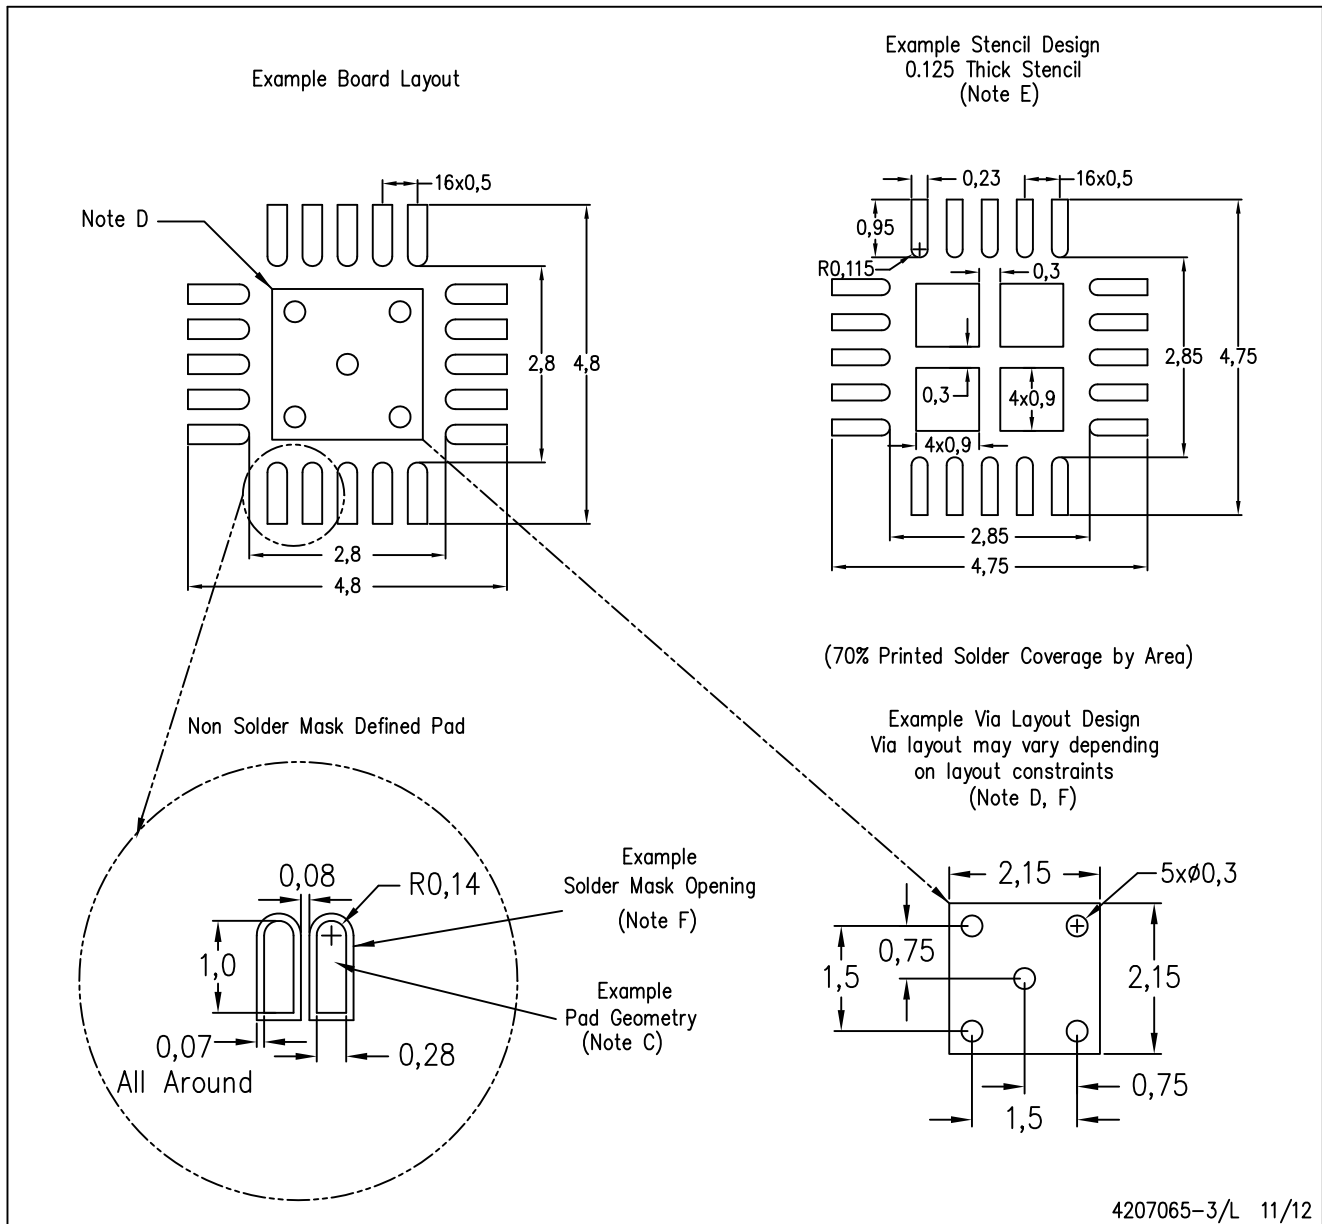

- NOTES:
- All linear dimensions are in millimeters.
  - This drawing is subject to change without notice.
  - Publication IPC-7351 is recommended for alternate designs.
  - This package is designed to be soldered to a thermal pad on the board. Refer to Application Note, Quad Flat-Pack Packages, Texas Instruments Literature No. SLUA271, and also the Product Data Sheets for specific thermal information, via requirements, and recommended board layout. These documents are available at [www.ti.com](http://www.ti.com) <<http://www.ti.com>>.
  - Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC 7525 for stencil design considerations.
  - Customers should contact their board fabrication site for recommended solder mask tolerances and via tenting recommendations for vias placed in the thermal pad.

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

### Products

Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>
Amplifiers	<a href="http://amplifier.ti.com">amplifier.ti.com</a>
Data Converters	<a href="http://dataconverter.ti.com">dataconverter.ti.com</a>
DLP® Products	<a href="http://www.dlp.com">www.dlp.com</a>
DSP	<a href="http://dsp.ti.com">dsp.ti.com</a>
Clocks and Timers	<a href="http://www.ti.com/clocks">www.ti.com/clocks</a>
Interface	<a href="http://interface.ti.com">interface.ti.com</a>
Logic	<a href="http://logic.ti.com">logic.ti.com</a>
Power Mgmt	<a href="http://power.ti.com">power.ti.com</a>
Microcontrollers	<a href="http://microcontroller.ti.com">microcontroller.ti.com</a>
RFID	<a href="http://www.ti-rfid.com">www.ti-rfid.com</a>
OMAP Applications Processors	<a href="http://www.ti.com/omap">www.ti.com/omap</a>
Wireless Connectivity	<a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a>

### Applications

Automotive and Transportation	<a href="http://www.ti.com/automotive">www.ti.com/automotive</a>
Communications and Telecom	<a href="http://www.ti.com/communications">www.ti.com/communications</a>
Computers and Peripherals	<a href="http://www.ti.com/computers">www.ti.com/computers</a>
Consumer Electronics	<a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>
Energy and Lighting	<a href="http://www.ti.com/energy">www.ti.com/energy</a>
Industrial	<a href="http://www.ti.com/industrial">www.ti.com/industrial</a>
Medical	<a href="http://www.ti.com/medical">www.ti.com/medical</a>
Security	<a href="http://www.ti.com/security">www.ti.com/security</a>
Space, Avionics and Defense	<a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a>
Video and Imaging	<a href="http://www.ti.com/video">www.ti.com/video</a>

### TI E2E Community

[e2e.ti.com](http://e2e.ti.com)