

## AGC AMPLIFIER

### FEATURES

- Low-Distortion Automatic Gain Control (AGC) Amplifier
- 5-V Power Supply
- 8-Pin Mini Small-Outline Package (MSOP)
- Wide Gain Control Range


### APPLICATIONS

- Digital TVs
- Digital CATVs
- Digital Set-Top Boxes (STBs)

### DESCRIPTION

The SN761643 is an automatic gain control (AGC) amplifier for the TV tuner system of a digital TV, CATV, or STB. The circuit consists of three stages of controlled-gain amplification, followed by a fixed-gain output amplifier.

The device is packaged in an 8-pin MSOP suitable for surface mounting.



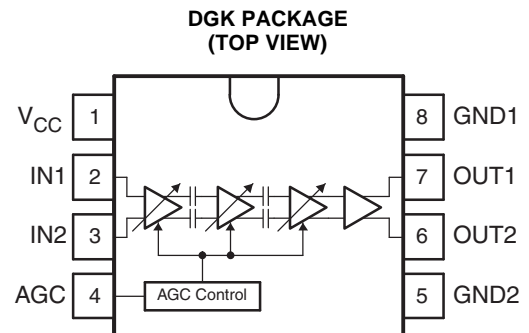


This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.




Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

TERMINAL FUNCTIONS

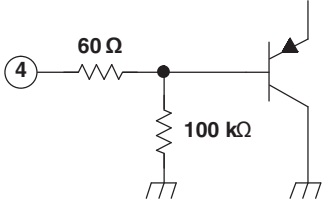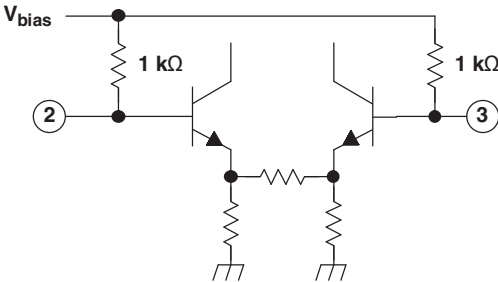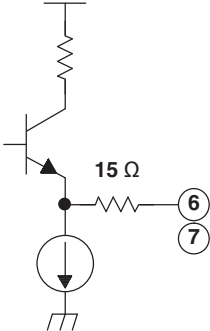TERMINAL		I/O	EQUIVALENT CIRCUIT	DESCRIPTION
NAME	NO.			
AGC	4	I		Gain control voltage input
GND1	8			Power amplifier ground
GND2	5	–		Pre-amplifier ground
IN1 IN2	2 3	I		AGC amplifier input
OUT1 OUT2	7 6	O		AGC amplifier output
V <sub>CC</sub>	1	–		5-V power supply

Correct Use

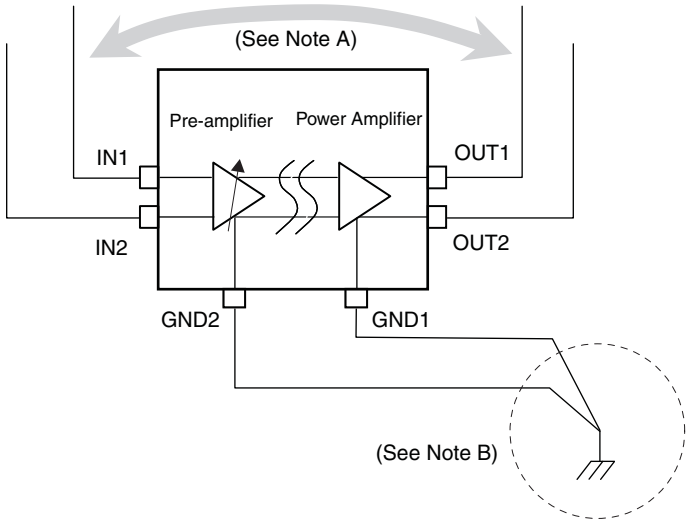

- A. Be careful to keep enough isolation between input and output line.
- B. Form a ground pattern as widely as possible. GND1 and GND2 should not have common impedance.

## ABSOLUTE MAXIMUM RATINGS<sup>(1)</sup>

over operating free-air temperature range (unless otherwise noted)

			MIN	MAX	UNIT
V <sub>CC</sub>	Supply voltage range <sup>(2)</sup>	V <sub>CC</sub> (pin 1)	–0.4	6.5	V
V <sub>I</sub>	Input voltage range <sup>(2)</sup>	AGC (pin 4)	–0.4	V <sub>CC</sub>	V
P <sub>D</sub>	Continuous total dissipation <sup>(3)</sup>			477	mW
T <sub>JC</sub>	Maximum junction temperature			150	°C

(1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

(2) Voltage values are with respect to the GND of the circuit.

(3) At T<sub>A</sub> ≤ 25°C. For T<sub>A</sub> > 25°C, the derating factor is 3.82 mW/°C.

## RECOMMENDED OPERATING CONDITIONS

			MIN	NOM	MAX	UNIT
V <sub>CC</sub>	Supply voltage		4.5	5	5.5	V
T <sub>OP</sub>	Operating free-air temperature		–20		85	°C

## DC ELECTRICAL CHARACTERISTICS

V<sub>CC</sub> = 5 V, T<sub>A</sub> = 25°C (unless otherwise noted)







PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
I <sub>CC</sub>	Supply current		28		mA
I <sub>IAGC</sub>	Input current (AGC)		30	60	μA
V <sub>AGC</sub> MAX	AGC maximum gain control voltage		3	V <sub>CC</sub>	V
V <sub>AGC</sub> MIN	AGC minimum gain control voltage		0	0.2	V

## AC ELECTRICAL CHARACTERISTICS

V<sub>CC</sub> = 5 V, T<sub>A</sub> = 25°C, parameters measured in test circuit (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
G <sub>MAX1</sub>	Maximum gain 1	V <sub>AGC</sub> = 3 V, f <sub>IN</sub> = 44 MHz, V <sub>IN</sub> = −60 dBm, differential out, see <a href="#">Figure 10</a>	57	61	65	dB
G <sub>MIN1</sub>	Minimum gain 1	V <sub>AGC</sub> = 0 V, f <sub>IN</sub> = 44 MHz, V <sub>IN</sub> = −60 dBm, differential out, see <a href="#">Figure 10</a>	−7	−4	−1	dB
G <sub>MAX2</sub>	Maximum gain 2	V <sub>AGC</sub> = 3 V, f <sub>IN</sub> = 44 MHz, V <sub>IN</sub> = −60 dBm, see <a href="#">Figure 1</a> and <a href="#">Figure 11</a>	51	55	59	dB
G <sub>MIN2</sub>	Minimum gain 2	V <sub>AGC</sub> = 0 V, f <sub>IN</sub> = 44 MHz, V <sub>IN</sub> = −60 dBm, see <a href="#">Figure 1</a> and <a href="#">Figure 11</a>	−13	−10	−7	dB
GCR	Gain control range	V <sub>AGC</sub> = 0 V to 3 V		65		dB
V <sub>OUT</sub>	Output voltage	Single-ended output, see <a href="#">Figure 3</a>		2.1		Vp-p
NF	Noise figure	Maximum gain, see <a href="#">Figure 2</a>		11		dB
IM3	Third-order intermodulation distortion	f <sub>IN1</sub> = 43.5 MHz, f <sub>IN2</sub> = 44.5 MHz, Maximum gain, V <sub>OUT</sub> = −2 dBm/tone, 1Vp-p See <a href="#">Figure 5</a> and <a href="#">Figure 12</a>		−50		dBc
IIP3	Input intercept point	Minimum gain		11		dBm
r <sub>IN</sub>	Input resistance (IN1, IN2)			1		kΩ
r <sub>OUT</sub>	Output resistance (OUT1, OUT2)			25		Ω

## TYPICAL CHARACTERISTICS

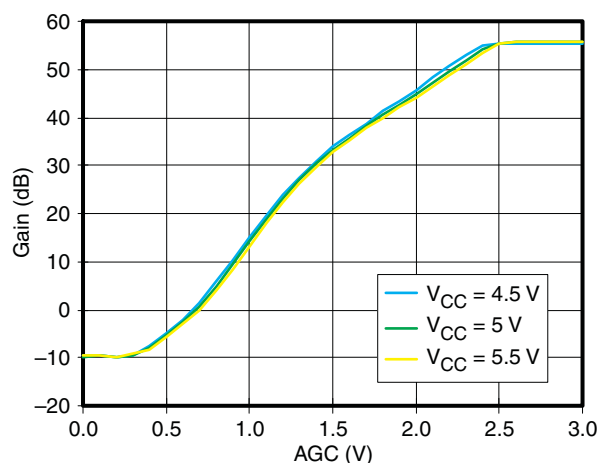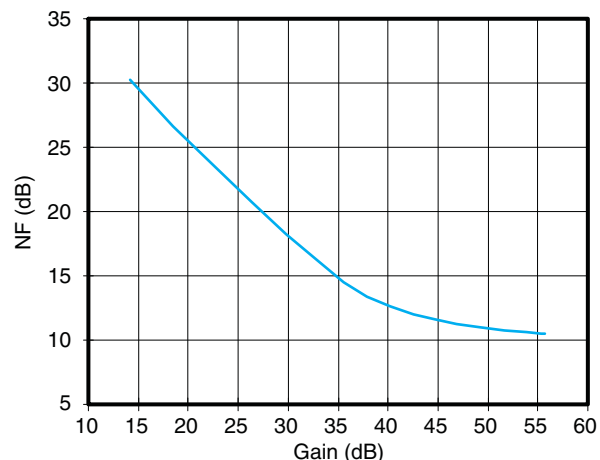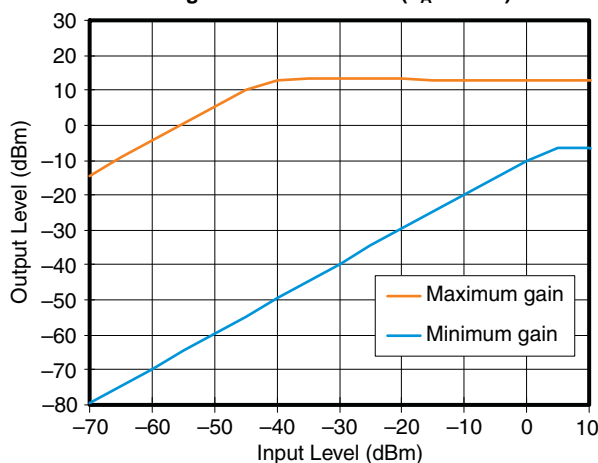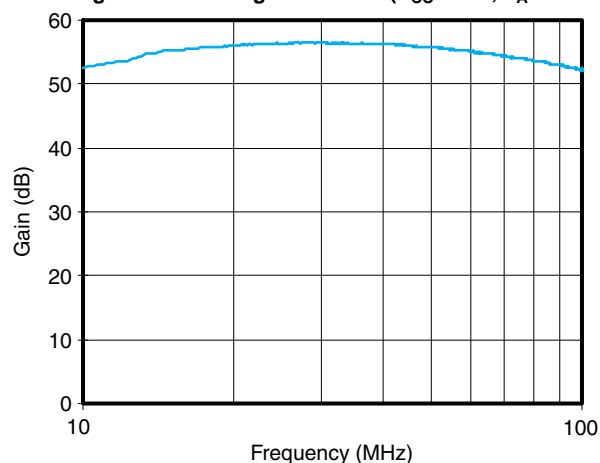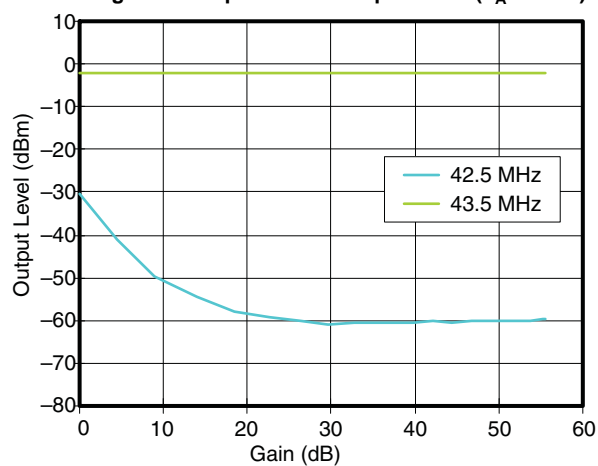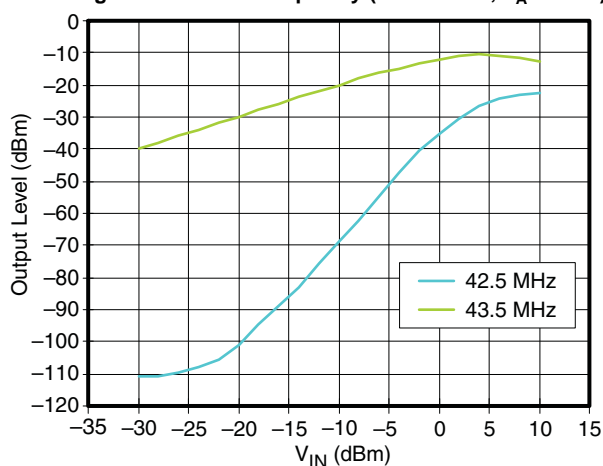Figure 1. Gain vs AGC ( $T_A = 25^\circ\text{C}$ )Figure 2. Noise Figure vs Gain ( $V_{CC} = 5\text{ V}$ ,  $T_A = 25^\circ\text{C}$ )Figure 3. Output Level vs Input Level ( $T_A = 25^\circ\text{C}$ )Figure 4. Gain vs Frequency (Gain = Max,  $T_A = 25^\circ\text{C}$ )Figure 5. IM3 vs Gain ( $V_{CC} = 5\text{ V}$ ,  $T_A = 25^\circ\text{C}$ )Figure 6. IM3 (Gain = Min,  $V_{CC} = 5\text{ V}$ ,  $T_A = 25^\circ\text{C}$ )

### TYPICAL CHARACTERISTICS (continued)

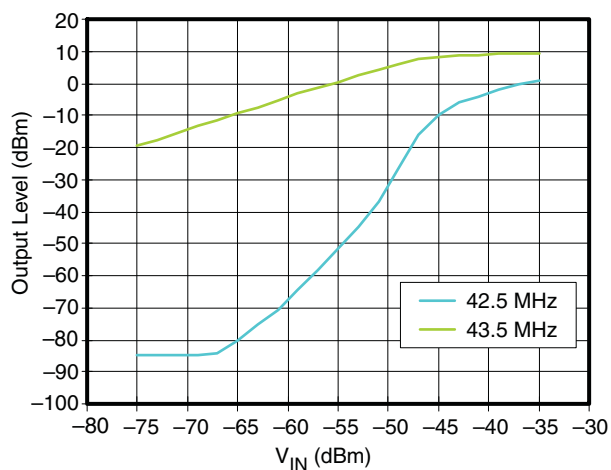


Figure 7. IM3 (Gain = Max,  $V_{CC} = 5$  V,  $T_A = 25^\circ\text{C}$ )

### S-Parameter

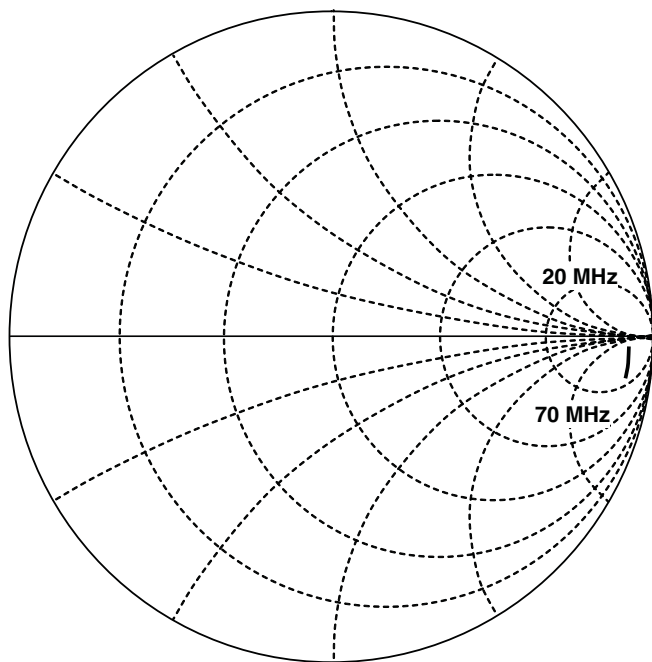


Figure 8. IN1

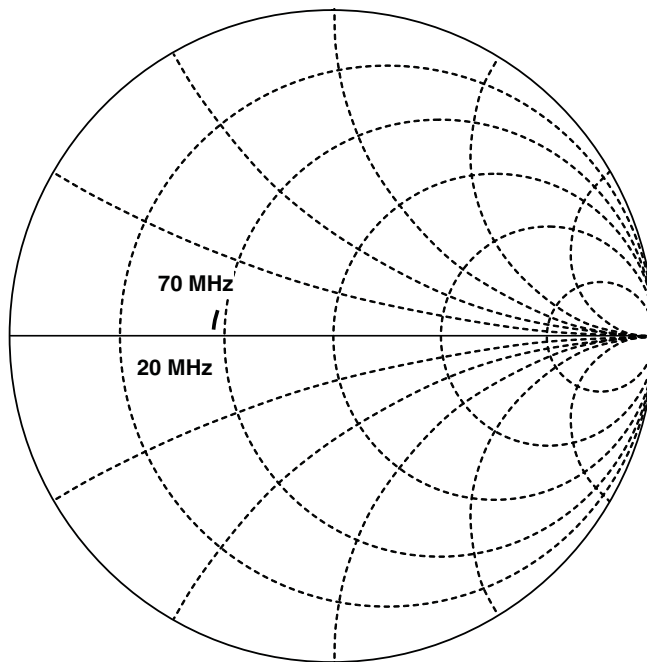


Figure 9. OUT1

## APPLICATION INFORMATION

### Test Circuits

This application information is advisory, and a performance check is required for actual application circuits.

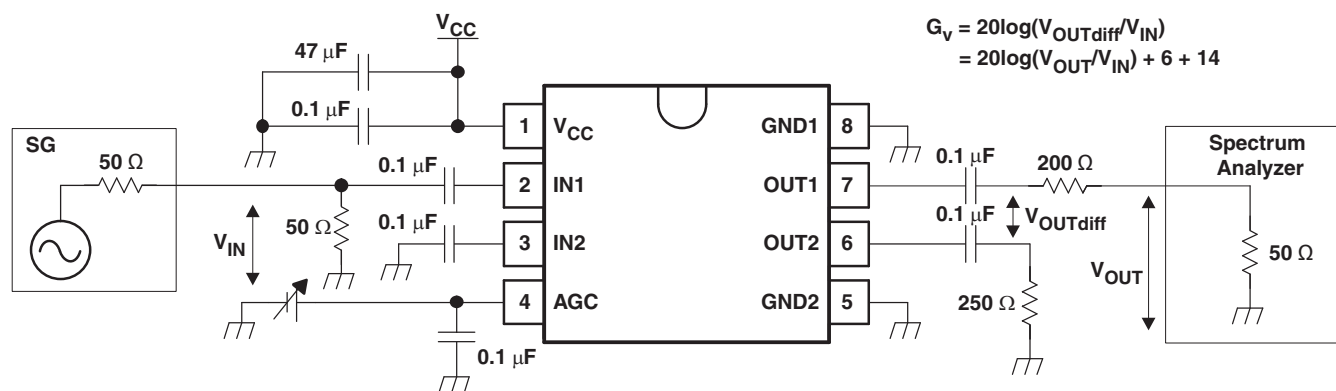


Figure 10. Measurement Circuit for Gain and Output Voltage 1

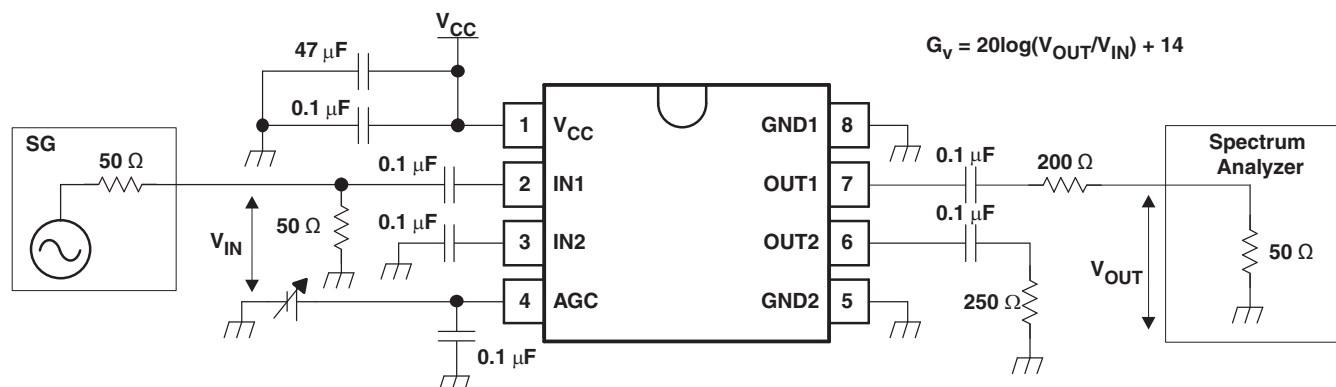


Figure 11. Measurement Circuit for Gain and Output Voltage 2

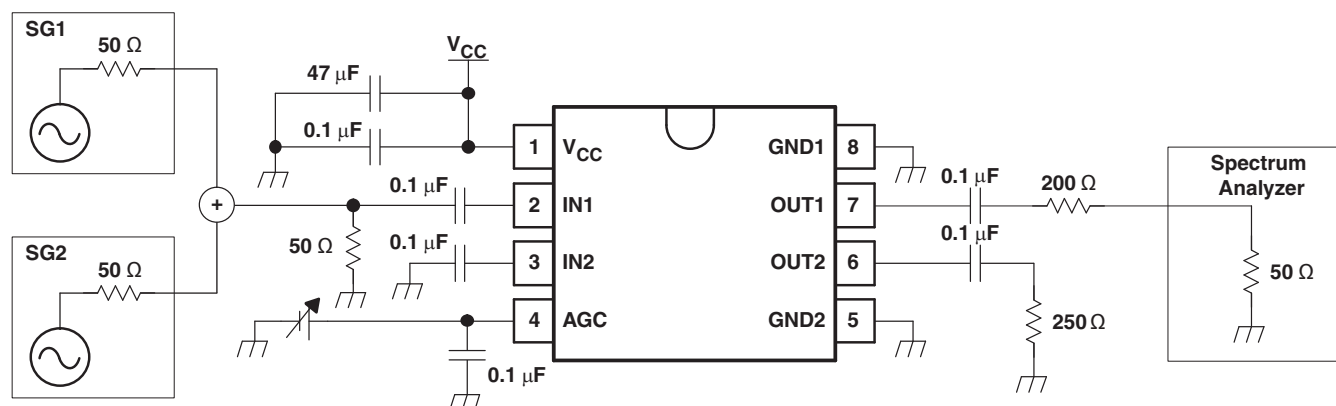


Figure 12. Measurement Circuit for IM3 and IIP3

**TAPE AND REEL INFORMATION**


\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN761643DGKR	VSSOP	DGK	8	0	330.0	12.4	5.3	3.4	1.4	8.0	12.0	Q1

## TAPE AND REEL BOX DIMENSIONS




\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN761643DGKR	VSSOP	DGK	8	0	367.0	367.0	35.0



## DGK (S-PDSO-G8)

## PLASTIC SMALL-OUTLINE PACKAGE

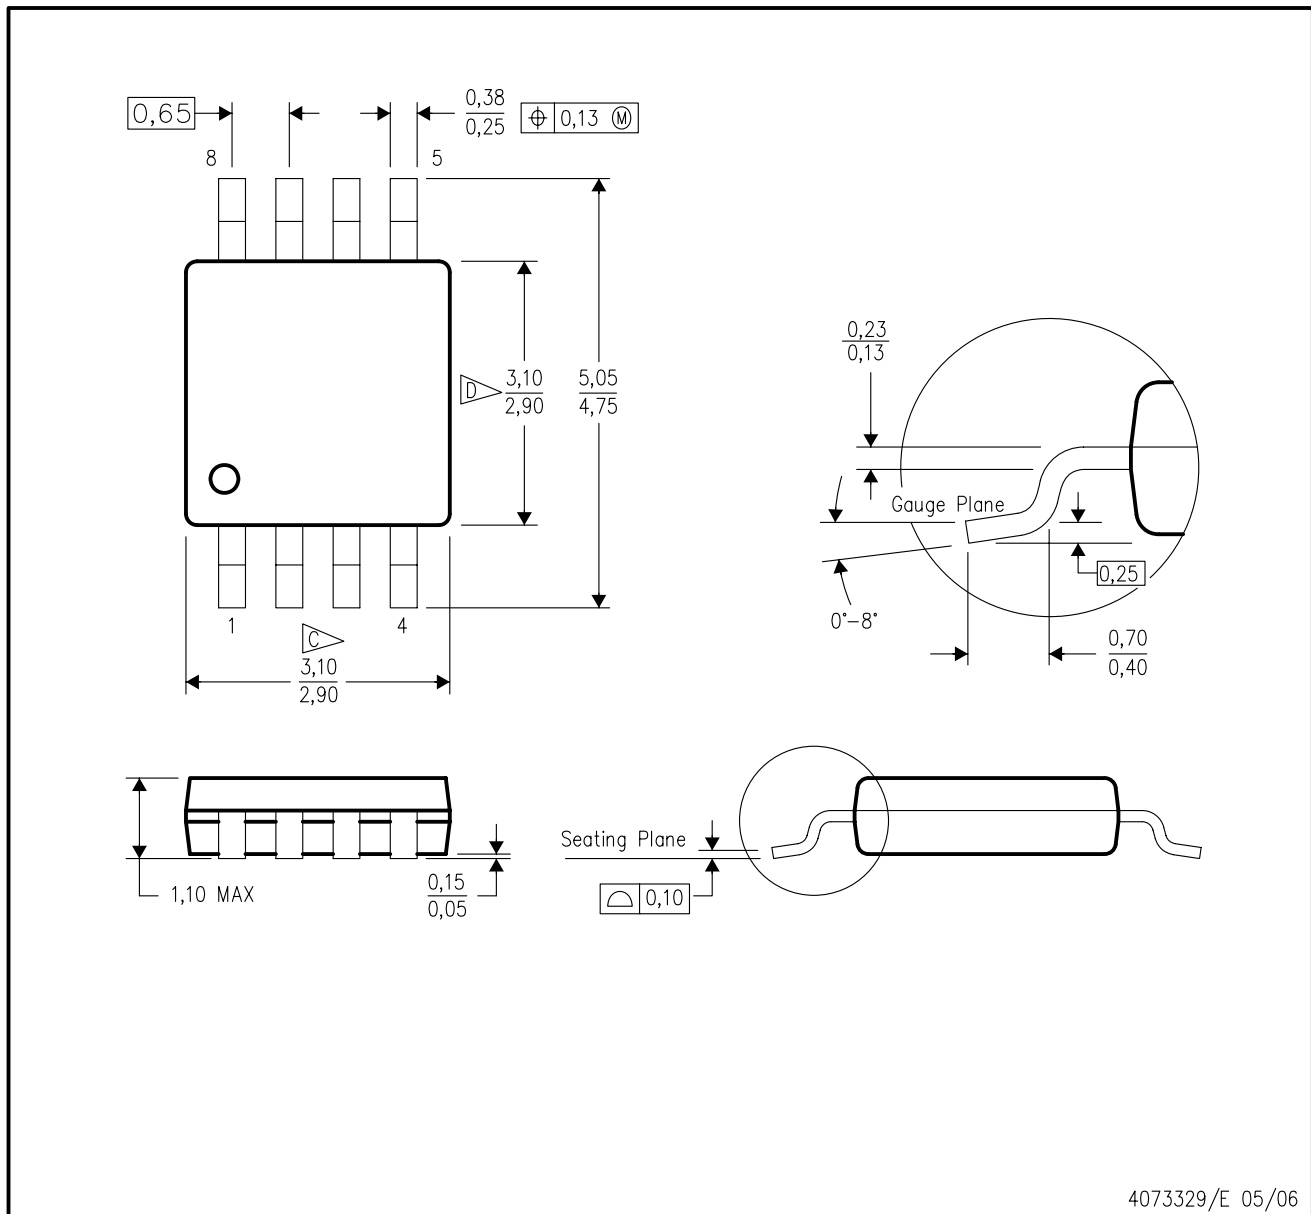

4073329/E 05/06

- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 per end.
  - D. Body width does not include interlead flash. Interlead flash shall not exceed 0.50 per side.
  - E. Falls within JEDEC MO-187 variation AA, except interlead flash.

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

### Products

Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>
Amplifiers	<a href="http://amplifier.ti.com">amplifier.ti.com</a>
Data Converters	<a href="http://dataconverter.ti.com">dataconverter.ti.com</a>
DLP® Products	<a href="http://www.dlp.com">www.dlp.com</a>
DSP	<a href="http://dsp.ti.com">dsp.ti.com</a>
Clocks and Timers	<a href="http://www.ti.com/clocks">www.ti.com/clocks</a>
Interface	<a href="http://interface.ti.com">interface.ti.com</a>
Logic	<a href="http://logic.ti.com">logic.ti.com</a>
Power Mgmt	<a href="http://power.ti.com">power.ti.com</a>
Microcontrollers	<a href="http://microcontroller.ti.com">microcontroller.ti.com</a>
RFID	<a href="http://www.ti-rfid.com">www.ti-rfid.com</a>
OMAP Applications Processors	<a href="http://www.ti.com/omap">www.ti.com/omap</a>
Wireless Connectivity	<a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a>

### Applications

Automotive and Transportation	<a href="http://www.ti.com/automotive">www.ti.com/automotive</a>
Communications and Telecom	<a href="http://www.ti.com/communications">www.ti.com/communications</a>
Computers and Peripherals	<a href="http://www.ti.com/computers">www.ti.com/computers</a>
Consumer Electronics	<a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>
Energy and Lighting	<a href="http://www.ti.com/energy">www.ti.com/energy</a>
Industrial	<a href="http://www.ti.com/industrial">www.ti.com/industrial</a>
Medical	<a href="http://www.ti.com/medical">www.ti.com/medical</a>
Security	<a href="http://www.ti.com/security">www.ti.com/security</a>
Space, Avionics and Defense	<a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a>
Video and Imaging	<a href="http://www.ti.com/video">www.ti.com/video</a>

### TI E2E Community

[e2e.ti.com](http://e2e.ti.com)