

500-mA, HIGH-EFFICIENCY MicroSiP™ STEP-DOWN CONVERTER (PROFILE <1mm)

Check for Samples: [TPS82690](#), [TPS82695](#), [TPS82697](#)

FEATURES

- Total Solution Size <6.7 mm²
- 95% Efficiency at 4MHz Operation
- 24μA Quiescent Current
- High Duty-Cycle Operation
- *Best in Class* Load and Line Transient
- ±2% Total DC Voltage Accuracy
- Automatic PFM/PWM Mode Switching
- Low Ripple Light-Load PFM Mode
- Excellent AC Load Regulation
- Internal Soft Start, 130-μs Start-Up Time
- Integrated Active Power-Down Sequencing (Optional)
- Current Overload and Thermal Shutdown Protection
- Sub 1-mm Profile Solution

APPLICATIONS

- LDO Replacement
- Cell Phones, Smart-Phones
- PoL Applications

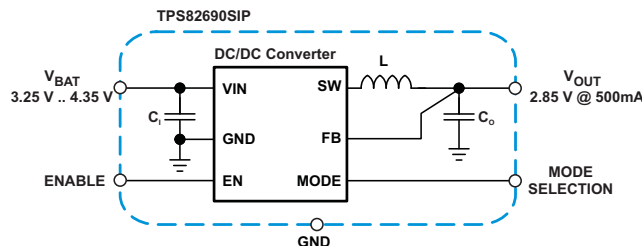


Figure 1. Typical Application

DESCRIPTION

The TPS8269xSiP device is a complete 500mA, DC/DC step-down power supply intended for low-power applications. Included in the package are the switching regulator, inductor and input/output capacitors. No additional components are required to finish the design.

The TPS8269xSiP is based on a high-frequency synchronous step-down dc-dc converter optimized for battery-powered portable applications. The MicroSiP™ DC/DC converter operates at a regulated 4-MHz switching frequency and enters the power-save mode operation at light load currents to maintain high efficiency over the entire load current range.

The PFM mode extends the battery life by reducing the quiescent current to 24μA (typ) during light load operation. For noise-sensitive applications, the device has PWM spread spectrum capability providing a lower noise regulated output, as well as low noise at the input. These features, combined with high PSRR and AC load regulation performance, make this device suitable to replace a linear regulator to obtain better power conversion efficiency.

The TPS8269xSiP is packaged in a compact (2.3mm x 2.9mm) and low profile (1.0mm) BGA package suitable for automated assembly by standard surface mount equipment.

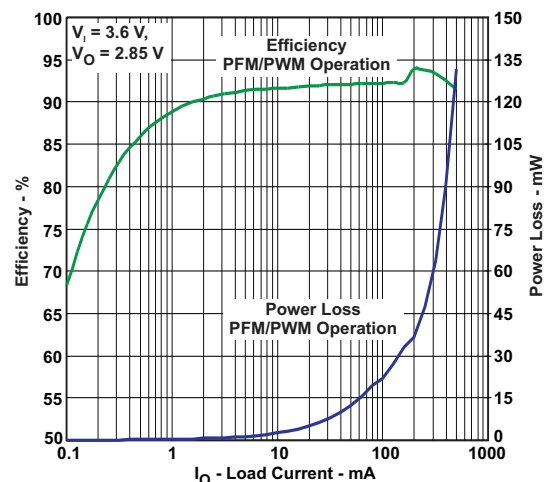


Figure 2. Efficiency vs. Load Current



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

MicroSiP, MicroSiP are trademarks of Texas Instruments.

UNLESS OTHERWISE NOTED this document contains PRODUCTION DATA information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 2011–2012, Texas Instruments Incorporated



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

ORDERING INFORMATION⁽¹⁾

| T _A | PART NUMBER | OUTPUT VOLTAGE ⁽²⁾ | DEVICE SPECIFIC FEATURE | ORDERING ⁽³⁾ | PACKAGE MARKING |
|----------------|-------------------------|-------------------------------|-------------------------|-------------------------|-----------------|
| -40°C to 85°C | TPS82695 | 2.5V | | TPS82695SIP | UF |
| | TPS82690 ⁽⁴⁾ | 2.85V | | TPS82690SIP | RC |
| | TPS82696 ⁽⁴⁾ | 2.9V | | TPS82696SIP | |
| | TPS82697 ⁽⁴⁾ | 2.8V | | TPS82697SIP | |

- (1) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI website at www.ti.com.
- (2) Internal tap points are available to facilitate output voltages in 25mV increments.
- (3) The SIP package is available in tape and reel. Add a R suffix (e.g. TPS82690SIPR) to order quantities of 3000 parts. Add a T suffix (e.g. TPS82690SIPR) to order quantities of 250 parts.
- (4) Product preview. [Contact TI factory for more information](#)

ABSOLUTE MAXIMUM RATINGS

over operating free-air temperature range (unless otherwise noted)⁽¹⁾

| | | UNIT |
|---------------------------|--|----------------------------------|
| V _I | Voltage at VIN ⁽²⁾⁽³⁾ | –0.3 V to 6 V |
| | Voltage at VOUT ⁽³⁾ | –0.3 V to 3.6 V |
| | Voltage at EN, MODE ⁽³⁾ | –0.3 V to V _I + 0.3 V |
| I _O | Peak output current | 500 mA |
| | Power dissipation | Internally limited |
| T _A | Operating temperature range ⁽⁴⁾ | –40°C to 85°C |
| T _{INT} (max) | Maximum internal operating temperature | 125°C |
| T _{stg} | Storage temperature range | –55°C to 125°C |
| ESD rating ⁽⁵⁾ | Human body model | 2 kV |
| | Charge device model | 1 kV |
| | Machine model | 200 V |

- (1) Stresses beyond those listed under *absolute maximum ratings* may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under *recommended operating conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) Operation above 4.35V input voltage for extended periods may affect device reliability. See *input capacitor selection* section for more details.
- (3) All voltage values are with respect to network ground terminal.
- (4) In applications where high power dissipation and/or poor package thermal resistance is present, the maximum ambient temperature may have to be derated. Maximum ambient temperature (T_{A(max)}) is dependent on the maximum operating temperature (T_{INT(max)}), the maximum power dissipation of the device in the application (P_{D(max)}), and the junction-to-ambient thermal resistance of the part/package in the application (θ_{JA}), as given by the following equation: T_{A(max)} = T_{J(max)} – (θ_{JA} × P_{D(max)}). To achieve optimum performance, it is recommended to operate the device with a maximum internal temperature of 105°C.
- (5) The human body model is a 100-pF capacitor discharged through a 1.5-kΩ resistor into each pin. The machine model is a 200-pF capacitor discharged directly into each pin.

THERMAL INFORMATION

| THERMAL METRIC ⁽¹⁾ | | TPS82690/95/97 | UNITS |
|-------------------------------|---|----------------|-------|
| | | SIP (8-Pins) | |
| θ_{JA} | Junction-to-ambient (top) thermal resistance | 125 | °C/W |
| | Junction-to-ambient (bottom) thermal resistance | 70 | |
| θ_{JCTop} | Junction-to-case (top) thermal resistance | – | |
| θ_{JB} | Junction-to-board thermal resistance | – | |
| ψ_{JT} | Junction-to-top characterization parameter | – | |
| ψ_{JB} | Junction-to-board characterization parameter | – | |
| θ_{JCbott} | Junction-to-case (bottom) thermal resistance | – | |

(1) For more information about traditional and new thermal metrics, see the *IC Package Thermal Metrics* application report, [SPRA953](#).

RECOMMENDED OPERATING CONDITIONS

| | | MIN | NOM | MAX | UNIT |
|-------|--|-----|-----|---------------------|------|
| V_I | Input voltage range | 2.3 | | 4.35 ⁽¹⁾ | V |
| I_O | Output current range | 0 | | 500 | mA |
| | Additional output capacitance (PFM/PWM operation) ⁽²⁾ | | 0 | 5 | μF |
| | Additional output capacitance (PWM operation) ⁽²⁾ | | 0 | 8 | μF |
| T_A | Ambient temperature | –40 | | +85 | °C |
| T_J | Operating junction temperature | –40 | | +125 | °C |

(1) Operation above 4.35V input voltage for extended periods may affect device reliability. See *input capacitor selection* section for more details.

(2) In certain applications larger capacitor values can be tolerable, see *output capacitor selection* section for more details.

ELECTRICAL CHARACTERISTICS

Minimum and maximum values are at $V_I = 2.3V$ to $4.35V$, $V_O = 2.5V$, $EN = 1.8V$, AUTO mode and $T_A = -40^{\circ}C$ to $85^{\circ}C$; Circuit of Parameter Measurement Information section (unless otherwise noted). Typical values are at $V_I = 3.6V$, $V_O = 2.5V$, $EN = 1.8V$, AUTO mode and $T_A = 25^{\circ}C$ (unless otherwise noted).

| PARAMETER | | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|------------------|--|----------------------------------|--|-----|------|------|------|
| SUPPLY CURRENT | | | | | | | |
| I _O | Operating quiescent current | TPS82690 | I _O = 0mA. Device not switching | | 24 | 50 | μA |
| | | | I _O = 0mA, PWM mode | | 4.5 | | mA |
| I _{SD} | Shutdown current | TPS8269X | EN = GND | | 0.5 | 5 | μA |
| UVLO | Undervoltage lockout threshold | TPS82690 TPS82695 TPS82697 | | | 2.05 | 2.1 | V |
| | | TPS82696 | | | 2.1 | 2.15 | V |
| PROTECTION | | | | | | | |
| | Thermal shutdown | TPS8269X | | | 140 | | °C |
| | Thermal shutdown hysteresis | | | | 10 | | °C |
| I _{LIM} | Peak input current limit | TPS8269X | | | 750 | | mA |
| I _{SC} | Input current limit under short-circuit conditions | TPS8269X | V _O shorted to ground | | 15 | | mA |
| ENABLE, MODE | | | | | | | |
| V _{IH} | High-level input voltage | TPS8269X | | 1.0 | | | V |
| V _{IL} | Low-level input voltage | | | | | 0.4 | V |
| | Input leakage current | | Input connected to GND or VIN | | 0.01 | 1.5 | μA |
| OSCILLATOR | | | | | | | |
| f _{SW} | Oscillator frequency | TPS8269X | I _O = 0mA. PWM operation. T _A = 25°C | 3.6 | 4 | 4.4 | MHz |

ELECTRICAL CHARACTERISTICS (continued)

Minimum and maximum values are at $V_I = 2.3V$ to $4.35V$, $V_O = 2.5V$, $EN = 1.8V$, AUTO mode and $T_A = -40^\circ C$ to $85^\circ C$; Circuit of Parameter Measurement Information section (unless otherwise noted). Typical values are at $V_I = 3.6V$, $V_O = 2.5V$, $EN = 1.8V$, AUTO mode and $T_A = 25^\circ C$ (unless otherwise noted).

| PARAMETER | | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|---------------|--|----------------------------------|---|-----------------------|-----------|-----------------------|------------------|
| OUTPUT | | | | | | | |
| $V_{(OUT)}$ | Regulated DC output voltage | TPS82690 TPS82697 | $3.25V \leq V_I \leq 4.35V$, $0mA \leq I_O \leq 500mA$ PFM/PWM operation | $0.98 \times V_{NOM}$ | V_{NOM} | $1.04 \times V_{NOM}$ | V |
| | | | $3.25V \leq V_I \leq 4.35V$, $0mA \leq I_O \leq 500mA$ Additional output capacitor, $C_O = 4.7\mu F$ 6.3V 0402 (muRata GRM155R60J475M) PFM/PWM operation | $0.98 \times V_{NOM}$ | V_{NOM} | $1.03 \times V_{NOM}$ | V |
| | | | $3.25V \leq V_I \leq 5.5V$, $0mA \leq I_O \leq 500mA$ PFM/PWM operation | $0.98 \times V_{NOM}$ | V_{NOM} | $1.05 \times V_{NOM}$ | V |
| | | | $3.25V \leq V_I \leq 5.5V$, $0mA \leq I_O \leq 500mA$ PWM operation | $0.98 \times V_{NOM}$ | V_{NOM} | $1.02 \times V_{NOM}$ | V |
| | | TPS82695 | $3.0V \leq V_I \leq 4.35V$, $0mA \leq I_O \leq 500mA$ PFM/PWM operation | $0.98 \times V_{NOM}$ | V_{NOM} | $1.04 \times V_{NOM}$ | V |
| | | | $3.0V \leq V_I \leq 5.5V$, $0mA \leq I_O \leq 500mA$ PFM/PWM operation | $0.97 \times V_{NOM}$ | V_{NOM} | $1.05 \times V_{NOM}$ | V |
| | | | $3.0V \leq V_I \leq 5.5V$, $0mA \leq I_O \leq 500mA$ PWM operation | $0.98 \times V_{NOM}$ | V_{NOM} | $1.02 \times V_{NOM}$ | V |
| | | TPS82696 | $3.25V \leq V_I \leq 5.5V$, $0mA \leq I_O \leq 500mA$ PFM/PWM operation | $0.97 \times V_{NOM}$ | V_{NOM} | $1.05 \times V_{NOM}$ | V |
| | | | $3.25V \leq V_I \leq 4.35V$, $0mA \leq I_O \leq 500mA$ Additional output capacitor, $C_O = 4.7\mu F$ 6.3V 0402 (muRata GRM155R60J475M) PFM/PWM operation | $0.97 \times V_{NOM}$ | V_{NOM} | $1.04 \times V_{NOM}$ | V |
| | | | $3.25V \leq V_I \leq 5.5V$, $0mA \leq I_O \leq 500mA$ PWM operation | $0.97 \times V_{NOM}$ | V_{NOM} | $1.03 \times V_{NOM}$ | V |
| | Line regulation | TPS8269X | $V_I = V_O + 0.5V$ (min 3.25V) to 5.5V, $I_O = 200mA$ | | 0.18 | | %/V |
| | Load regulation | | $I_O = 0mA$ to 500 mA. PWM operation | | -0.0002 | | %/mA |
| | Feedback input resistance | TPS8269X | | | 480 | | k Ω |
| $r_{DS(on)}$ | Input-to-output On-resistance | TPS8269X | $V_I = 3.25V$. Device not switching | | 390 | | m Ω |
| ΔV_O | Power-save mode ripple voltage | TPS8269X | $I_O = 1mA$ | | 70 | | mV _{PP} |
| | | | $I_O = 1mA$ Additional output capacitor, $C_O = 4.7\mu F$ 6.3V 0402 (muRata GRM155R60J475M) | | 35 | | mV _{PP} |
| | Start-up time | TPS82690 TPS82696 TPS82697 | $I_O = 0mA$, Time from active EN to V_O | | 130 | | μs |
| | | | Time from active EN to full load current operation permitted | | 350 | | μs |
| r_{DIS} | Discharge resistor for power-down sequence | TPS8269X | | | 100 | 150 | Ω |

SIP-8 (TOP VIEW)

| | | | | |
|------|------|------|------|-----|
| VOUT | (A1) | (A2) | (A3) | VIN |
| MODE | (B1) | (B2) | (B1) | EN |
| GND | (C1) | (C2) | (C3) | GND |

SIP-8 (BOTTOM VIEW)


| | | | | |
|-----|------|------|------|------|
| VIN | (A3) | (A2) | (A1) | VOUT |
| EN | (B3) | (B2) | (B1) | MODE |
| GND | (C3) | (C2) | (C1) | GND |

| TERMINAL | | I/O | DESCRIPTION |
|----------|------------|-----|---|
| NAME | NO. | | |
| VOUT | A1 | O | Power output pin. Apply output load between this pin and GND. |
| VIN | A2, A3 | I | The VIN pins supply current to the TPS8269xSIP's internal regulator. |
| EN | B2 | I | This is the enable pin of the device. Connecting this pin to ground forces the converter into shutdown mode. Pulling this pin to V_I enables the device. This pin must not be left floating and must be terminated. |
| MODE | B1 | I | This is the mode selection pin of the device. This pin must not be left floating and must be terminated. |
| | | | MODE = LOW: The device is operating in regulated frequency pulse width modulation mode (PWM) at high-load currents and in pulse frequency modulation mode (PFM) at light load currents. |
| | | | MODE = HIGH: Low-noise mode enabled, regulated frequency PWM operation forced. |
| GND | C1, C2, C3 | – | Ground pin. |

The diagram shows the internal architecture of the DC/DC converter. Key components include:

- Input Stage:** VIN is connected to the Undervoltage Lockout Bias Supply, Bandgap, and Thermal Shutdown blocks. The Bandgap provides a reference voltage $V_{REF} = 0.8\text{ V}$.
- Control Logic:** The Power Save Mode Switching block receives inputs from Soft-Start, Frequency Control, and Negative Inductor Current Detect. It also outputs to the Current Limit Detect block.
- Feedback Loop:** The Feedback Divider (consisting of resistors R1 and R2) samples the output voltage VOUT and provides feedback to the operational amplifier. The op-amp's non-inverting input is also connected to V_{REF} .
- Power Stage:** The Gate Driver Anti Shoot-Through block drives the MOSFETs. The output of the converter is filtered by an inductor L (1 μH) and a capacitor C_o (4.7 μF) to produce VOUT.
- Protection:** The Current Limit Detect block monitors the inductor current and provides feedback to the Power Save Mode Switching block.

PARAMETER MEASUREMENT INFORMATION

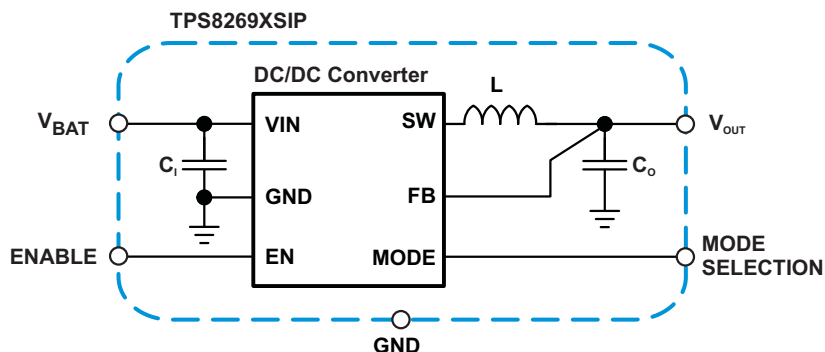

TYPICAL CHARACTERISTICS

Table of Graphs

| | | | FIGURE |
|--------|---------------------------------------|------------------|----------------------------|
| η | Efficiency | vs Load current | 3, 4 |
| | | vs Load current | 5, 6 |
| | | vs Input voltage | 7 |
| | Peak-to-peak output ripple voltage | vs Load current | 8, 9 |
| V_O | DC output voltage | vs Load current | 10, 11, 120 |
| | Combined line/load transient response | | 13, 14 |
| | Load transient response | | 15, 16, 17, 18 |
| | AC load transient response | | 19, 20, 21, 22, 23, 24, 25 |
| | PFM/PWM boundaries | vs Input voltage | 26 |
| I_Q | Quiescent current | vs Input voltage | 27 |
| f_s | PWM switching frequency | vs Input voltage | 28 |
| | PFM switching frequency | vs Load current | 29 |
| | Start-up | | 30, 31 |
| PSRR | Power supply rejection ratio | vs. Frequency | 32 |

TYPICAL CHARACTERISTICS (continued)

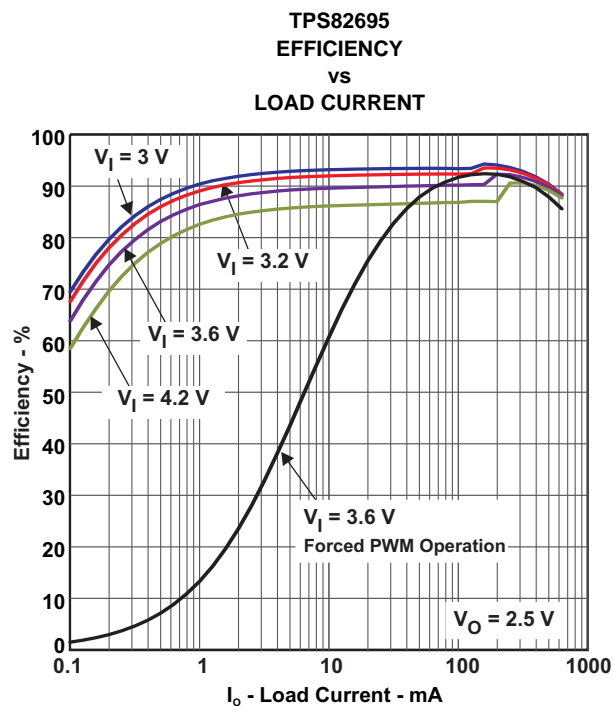


Figure 3.

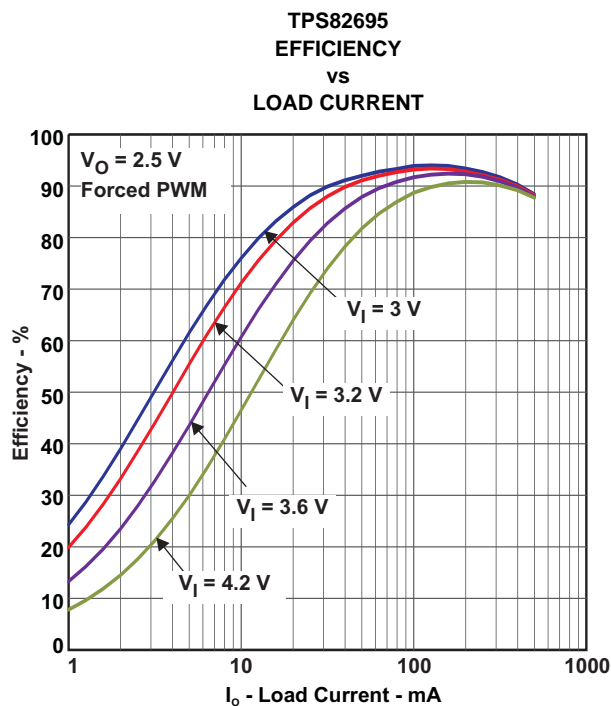


Figure 4.

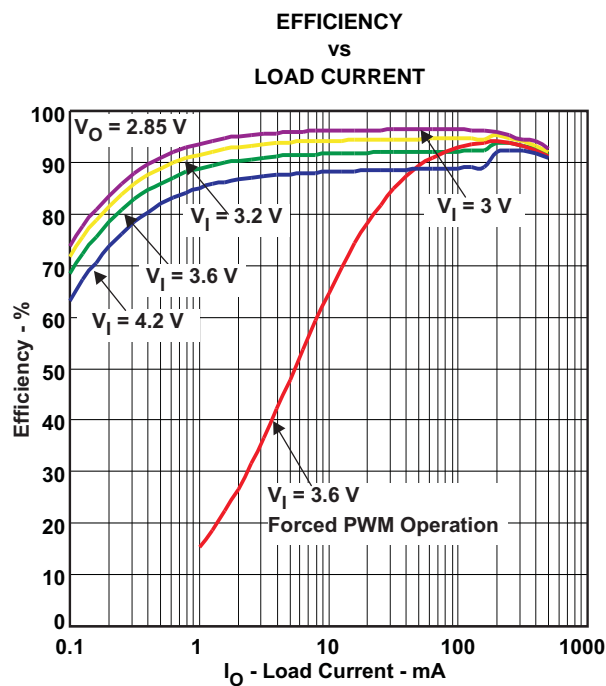


Figure 5.

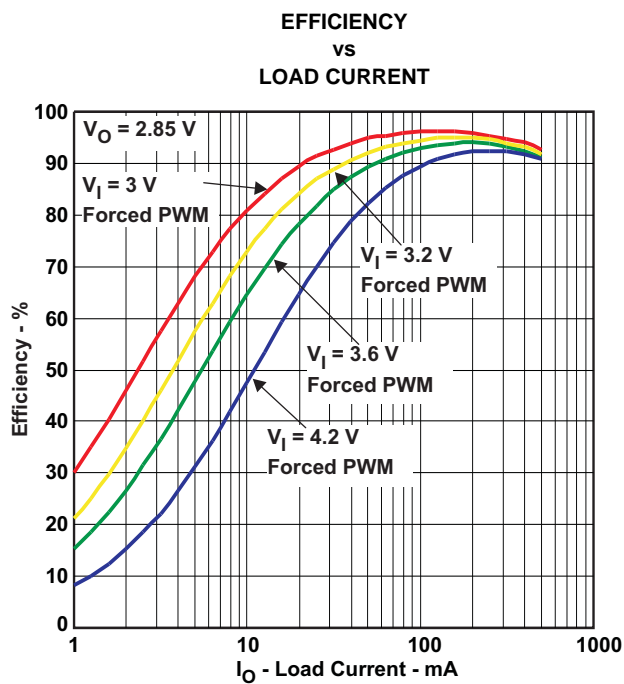


Figure 6.

TYPICAL CHARACTERISTICS (continued)

EFFICIENCY
vs
INPUT VOLTAGE

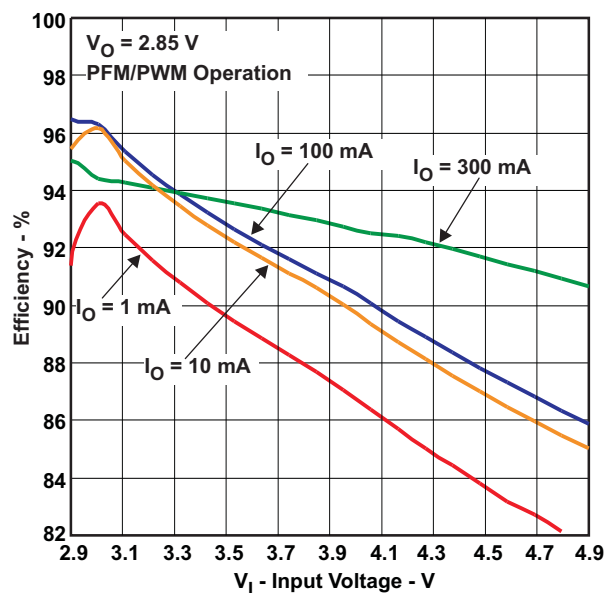


Figure 7.

PEAK-TO-PEAK OUTPUT RIPPLE VOLTAGE
vs
LOAD CURRENT

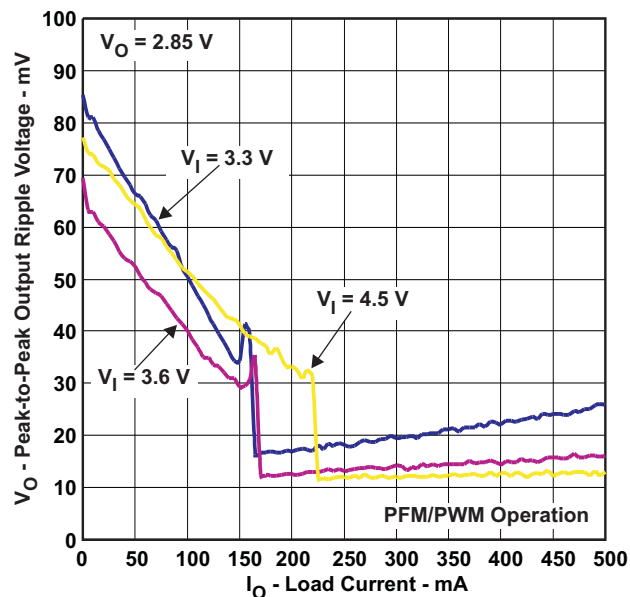


Figure 8.

PEAK-TO-PEAK OUTPUT RIPPLE VOLTAGE
vs
LOAD CURRENT

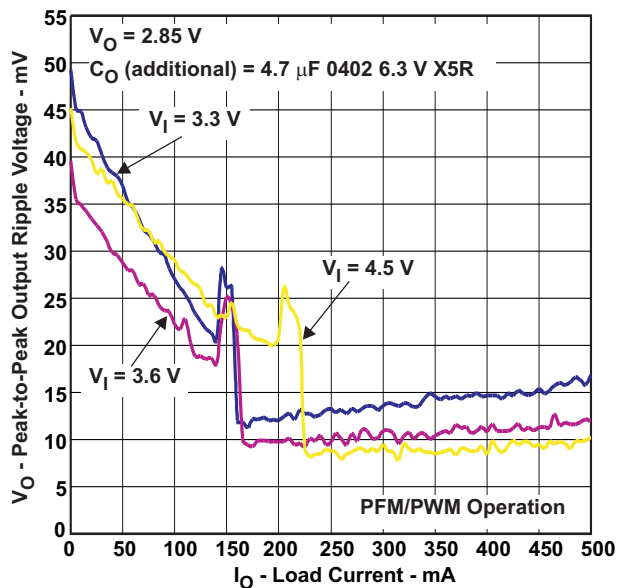


Figure 9.

DC OUTPUT VOLTAGE
vs
LOAD CURRENT

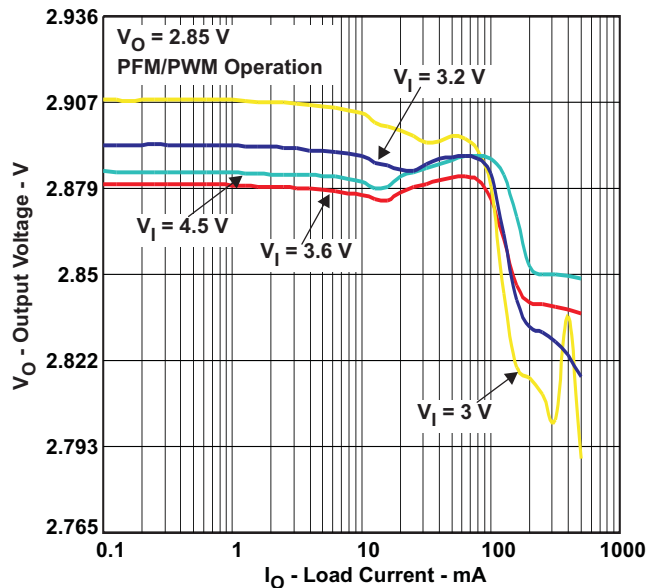


Figure 10.

TYPICAL CHARACTERISTICS (continued)

DC OUTPUT VOLTAGE
vs
LOAD CURRENT

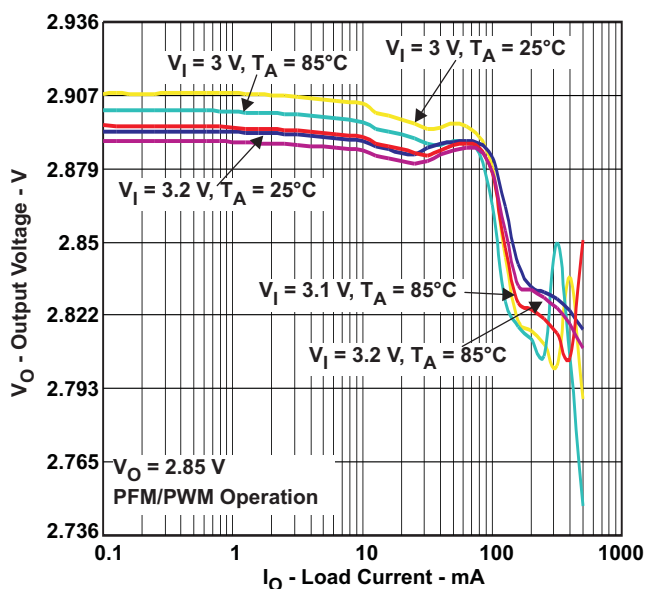


Figure 11.

DC OUTPUT VOLTAGE
vs
LOAD CURRENT

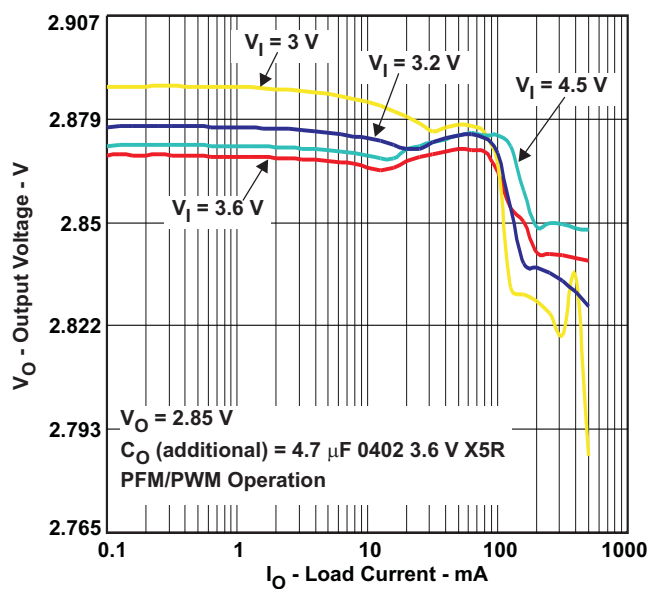


Figure 12.

COMBINED LINE/LOAD TRANSIENT RESPONSE

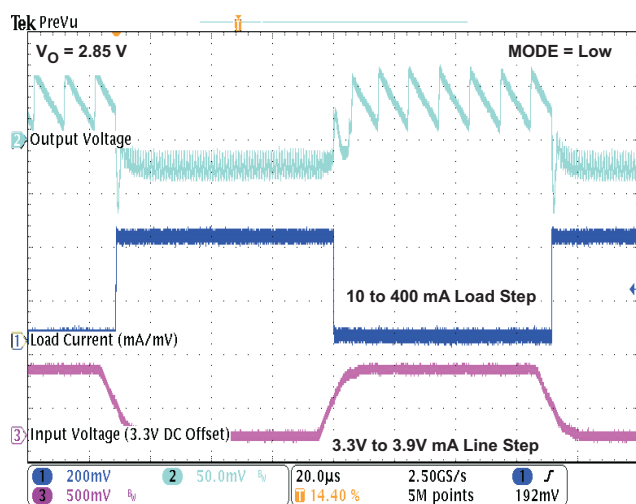


Figure 13.

COMBINED LINE/LOAD TRANSIENT RESPONSE

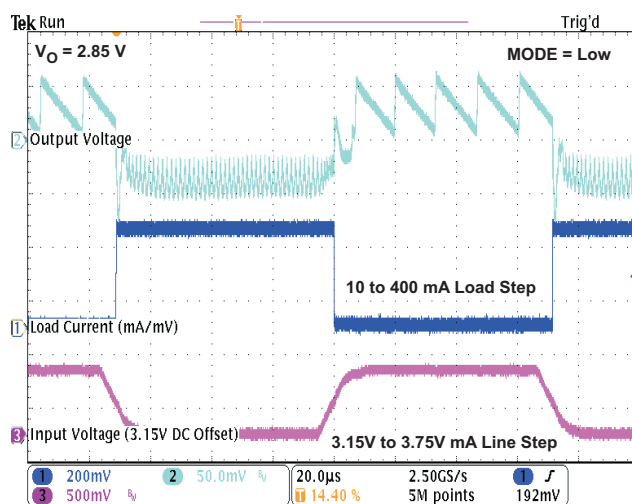


Figure 14.

TYPICAL CHARACTERISTICS (continued)

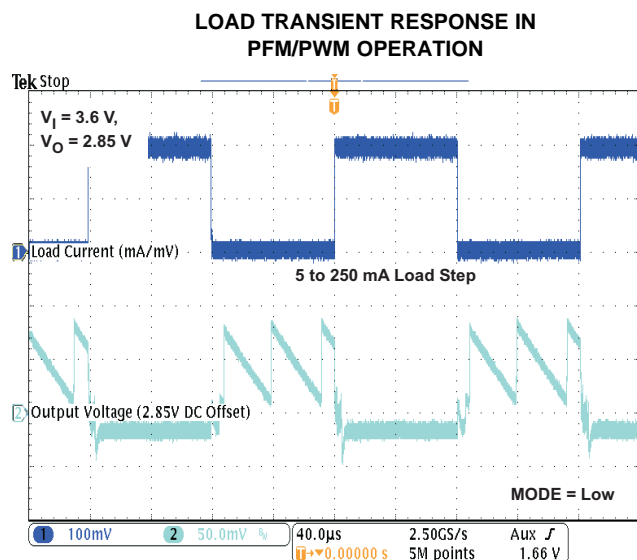


Figure 15.

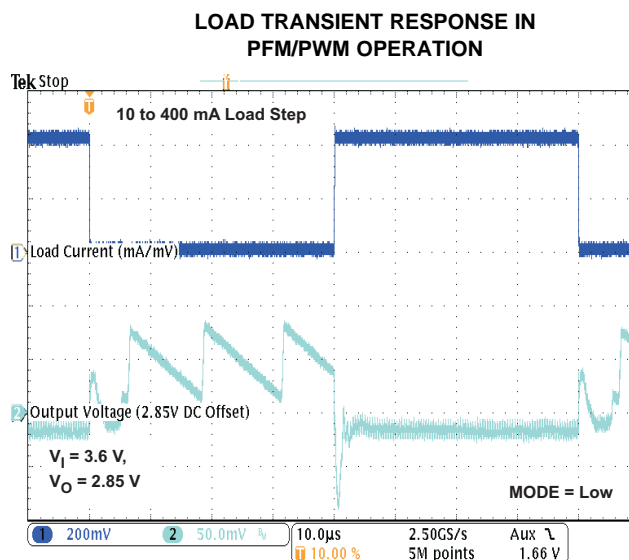


Figure 16.

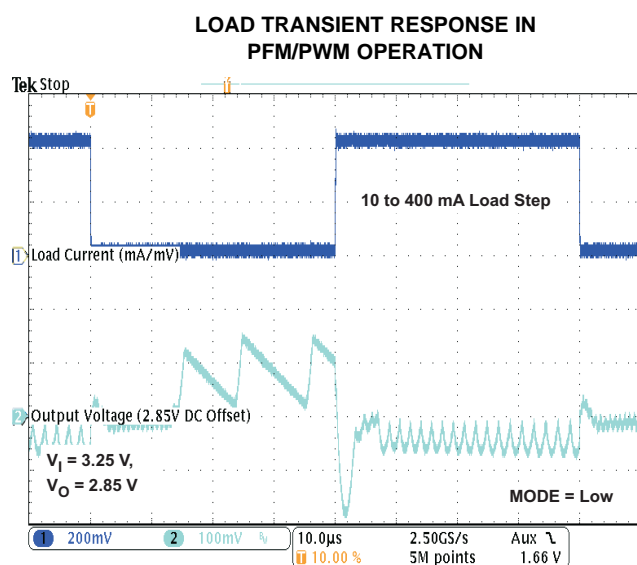


Figure 17.

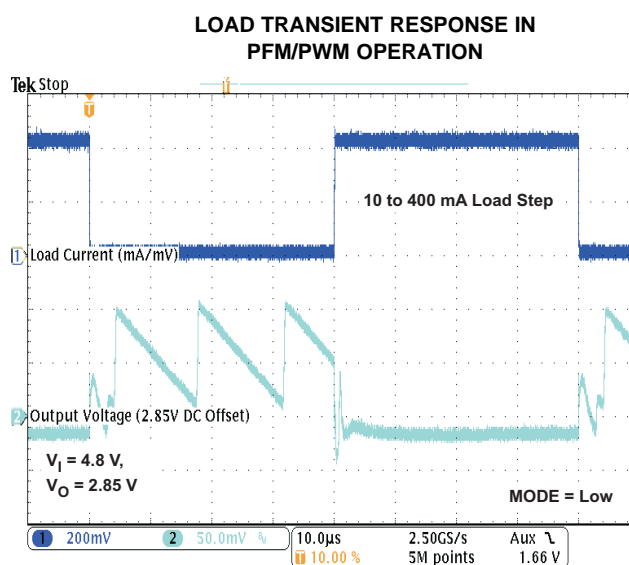


Figure 18.

TYPICAL CHARACTERISTICS (continued)

AC LOAD TRANSIENT RESPONSE

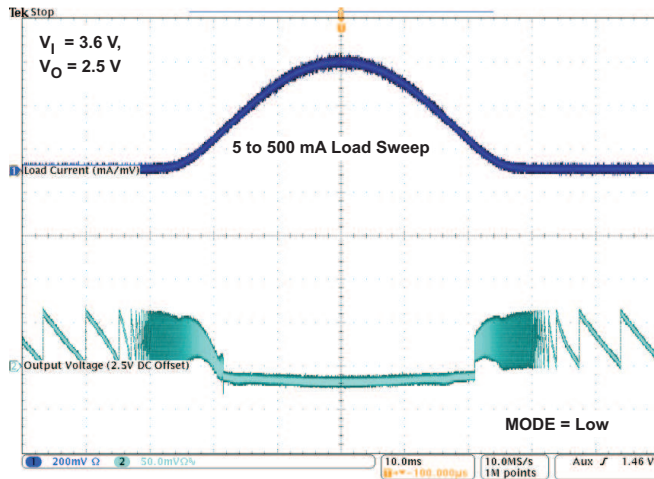


Figure 19.

AC LOAD TRANSIENT RESPONSE

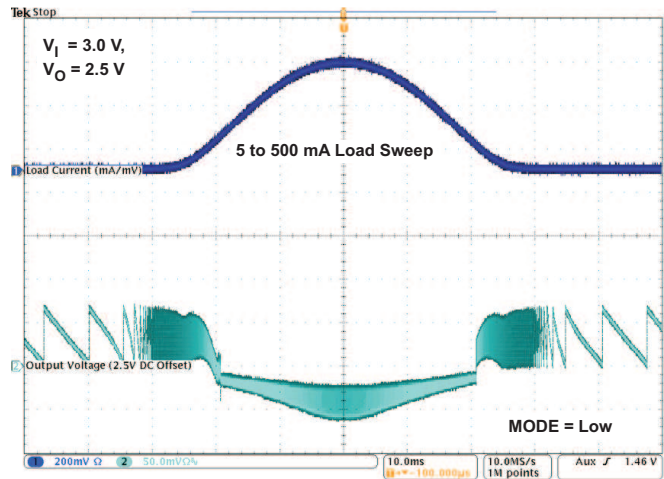


Figure 20.

AC LOAD TRANSIENT RESPONSE

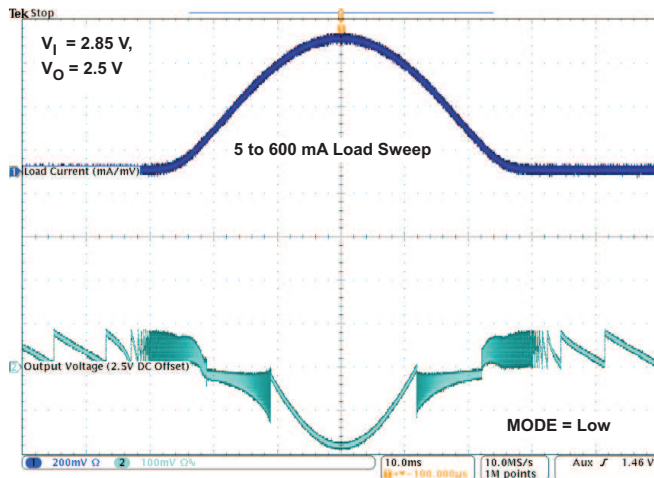


Figure 21.

AC LOAD TRANSIENT RESPONSE

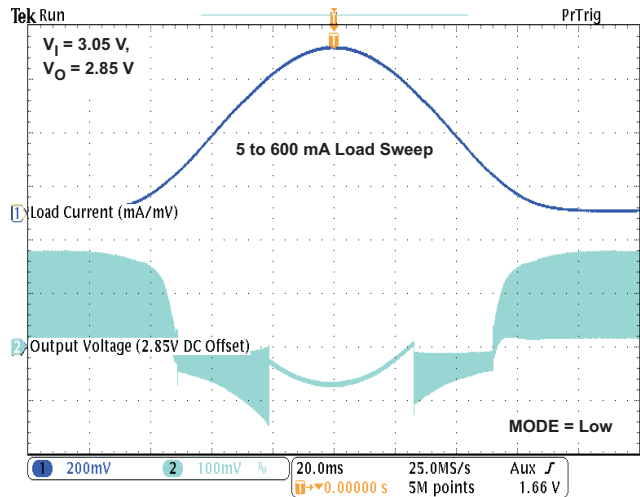


Figure 22.

TYPICAL CHARACTERISTICS (continued)

AC LOAD TRANSIENT RESPONSE

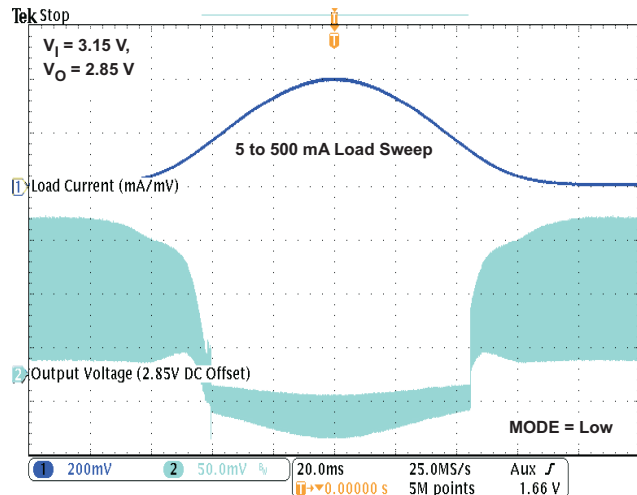


Figure 23.

AC LOAD TRANSIENT RESPONSE

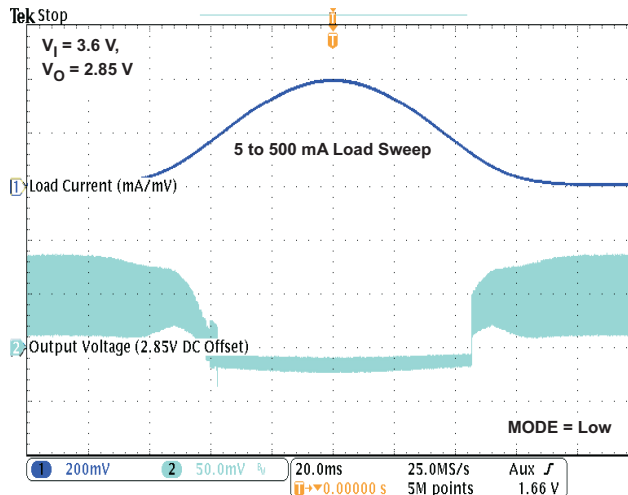


Figure 24.

AC LOAD TRANSIENT RESPONSE

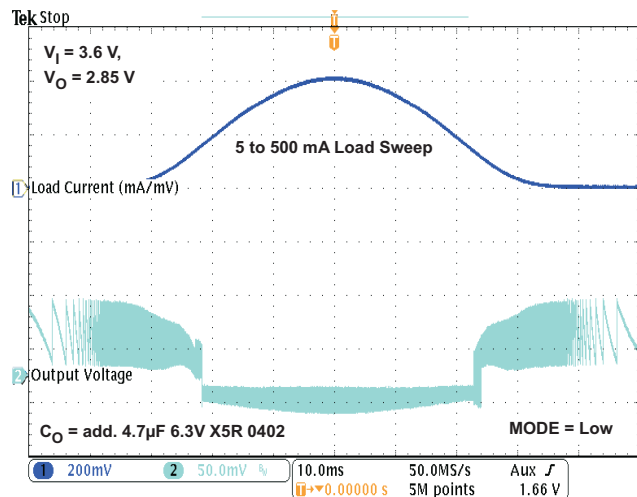


Figure 25.

PFM/PWM BOUNDARIES

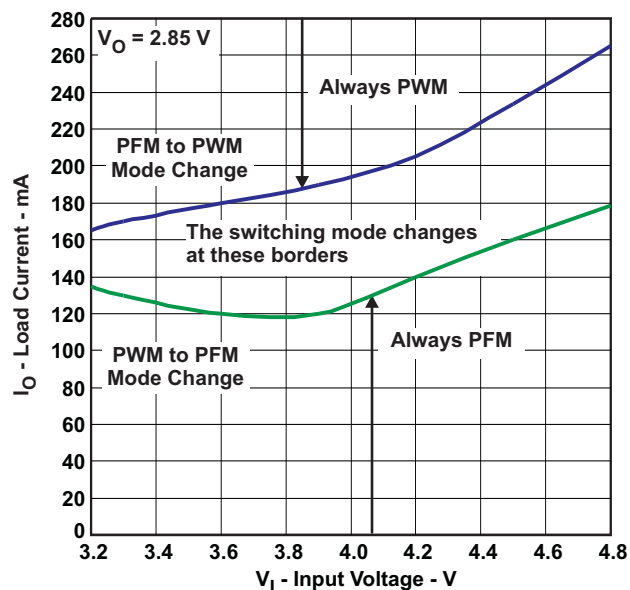


Figure 26.

TYPICAL CHARACTERISTICS (continued)

QUIESCENT CURRENT
vs
INPUT VOLTAGE

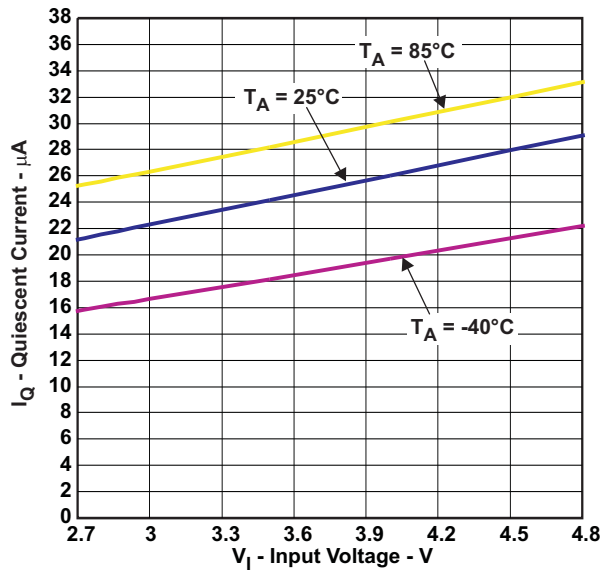


Figure 27.

PWM SWITCHING FREQUENCY
vs
INPUT VOLTAGE

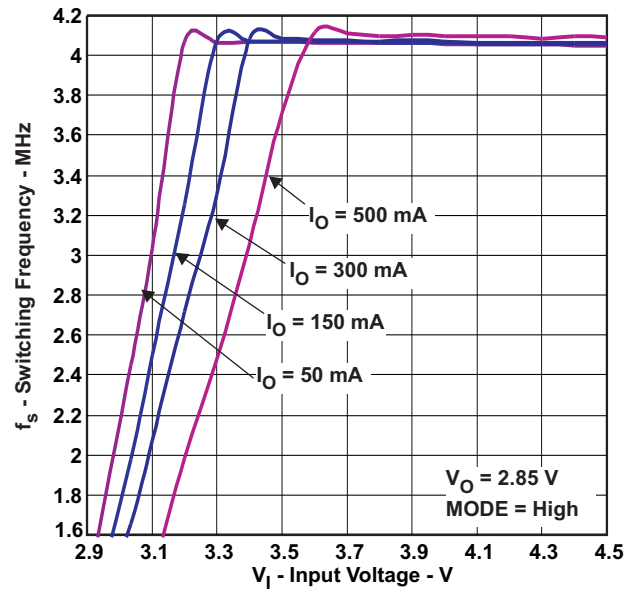


Figure 28.

PFM SWITCHING FREQUENCY
vs
LOAD CURRENT

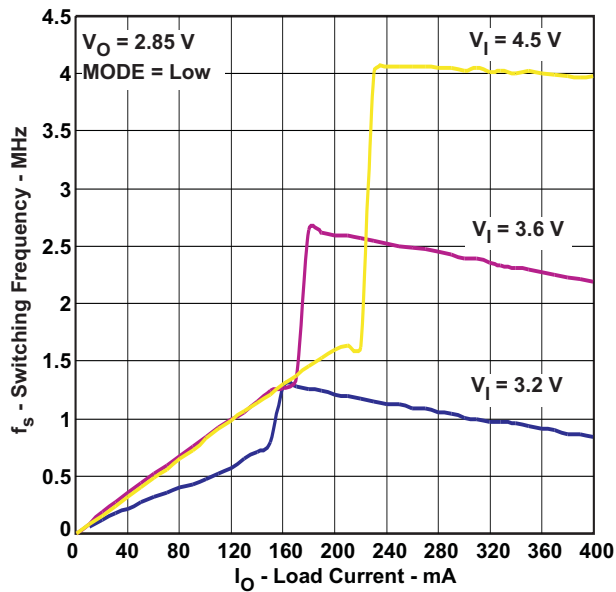


Figure 29.

START-UP

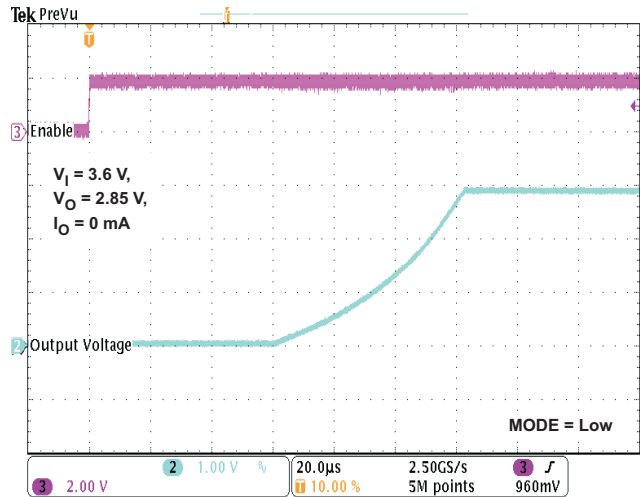


Figure 30.

TYPICAL CHARACTERISTICS (continued)

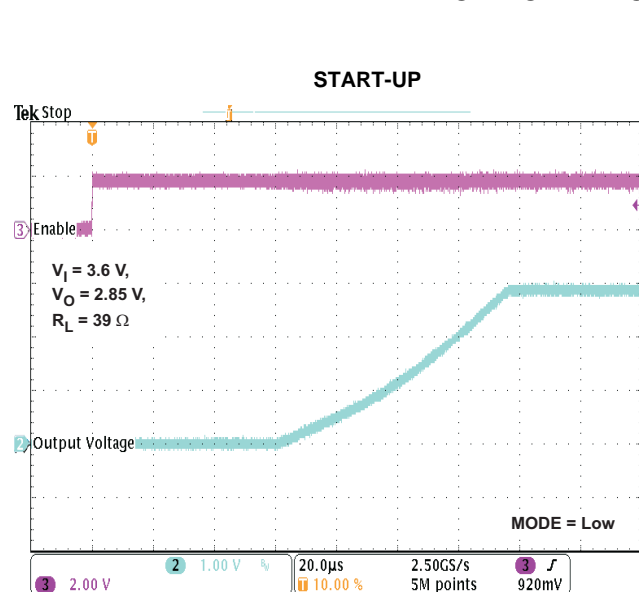


Figure 31.

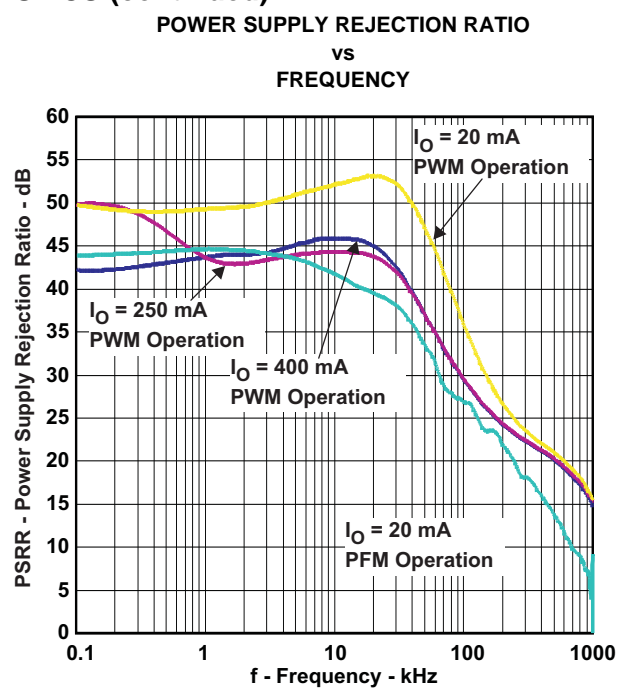


Figure 32.

DETAILED DESCRIPTION

OPERATION

The TPS8269xSIP is a standalone synchronous step-down converter operating at a regulated 4-MHz frequency pulse width modulation (PWM) at moderate to heavy load currents (up to 500mA output current). At light load currents, the TPS8269xSIP's converter operates in power-save mode with pulse frequency modulation (PFM).

The converter uses a unique frequency locked ring oscillating modulator to achieve *best-in-class* load and line response. One key advantage of the non-linear architecture is that there is no traditional feed-back loop. The loop response to change in V_O is essentially instantaneous, which explains the transient response. Although this type of operation normally results in a switching frequency that varies with input voltage and load current, an internal frequency lock loop (FLL) holds the switching frequency constant over a large range of operating conditions.

Combined with *best in class* load and line transient response characteristics, the low quiescent current of the device (ca. 24 μ A) allows to maintain high efficiency at light load, while preserving fast transient response for applications requiring tight output regulation.

The TPS8269xSIP integrates an input current limit to protect the device against heavy load or short circuits and features an undervoltage lockout circuit to prevent the device from misoperation at low input voltages.

POWER-SAVE MODE

If the load current decreases, the converter will enter Power Save Mode operation automatically. During power-save mode the converter operates in discontinuous current (DCM) with a minimum of one pulse, which produces low output ripple compared with other PFM architectures.

When in power-save mode, the converter resumes its operation when the output voltage trips below the nominal voltage. It ramps up the output voltage with a minimum of one pulse and goes into power-save mode when the output voltage is within its regulation limits again.

PFM mode is left and PWM operation is entered as the output current can no longer be supported in PFM mode. As a consequence, the DC output voltage is typically positioned ca. 1.5% above the nominal output voltage and the transition between PFM and PWM is seamless.

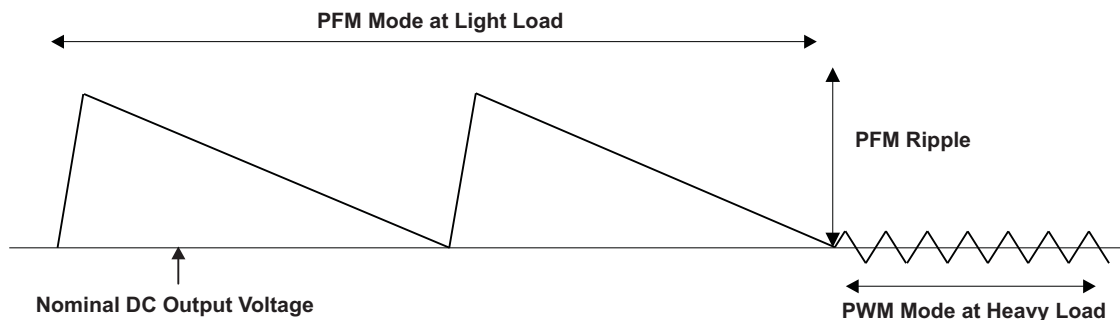


Figure 33. Operation in PFM Mode and Transfer to PWM Mode

MODE SELECTION

The MODE pin allows to select the operating mode of the device. Connecting this pin to GND enables the automatic PWM and power-save mode operation. The converter operates in regulated frequency PWM mode at moderate to heavy loads and in the PFM mode during light loads, which maintains high efficiency over a wide load current range.

Pulling the MODE pin high forces the converter to operate in the PWM mode even at light load currents. The advantage is that the converter operates with a fixed frequency that allows simple filtering of the switching frequency for noise-sensitive applications. In this mode, the efficiency is lower compared to the power-save mode during light loads.

For additional flexibility, it is possible to switch from power-save mode to PWM mode during operation. This allows efficient power management by adjusting the operation of the converter to the specific system requirements.

LOW DROPOUT, 100% DUTY CYCLE OPERATION

The device starts to enter 100% duty cycle mode once input and output voltage come close together. In order to maintain the output voltage, the DC/DC converter's high-side MOSFET is turned on 100% for one or more cycles.

With further decreasing V_{IN} the high-side switch is constantly turned on, thereby providing a low input-to-output voltage difference. This is particularly useful in battery-powered applications to achieve longest operation time by taking full advantage of the whole battery voltage range.

SOFT START

The TPS8269xSIP has an internal soft-start circuit that limits the inrush current during start-up. This limits input voltage drops when a battery or a high-impedance power source is connected to the input of the MicroSiP™ converter.

The soft-start system progressively increases the switching on-time from a minimum pulse-width of 35ns as a function of the output voltage. This mode of operation continues for c.a. 100µs after enable. Should the output voltage not have reached its target value by that time, such as in the case of heavy load, the soft-start transitions to a second mode of operation.

If the output voltage has raised above 0.5V (approximately), the converter increases the input current limit thereby enabling the power supply to come-up properly. The start-up time mainly depends on the capacitance present at the output node and load current.

ENABLE

The TPS8269xSIP device starts operation when EN is set high and starts up with the soft start as previously described. For proper operation, the EN pin must be terminated and must not be left floating.

Pulling the EN pin low forces the device into shutdown. In this mode, all internal circuits are turned off and V_{IN} current reduces to the device leakage current, typically a few hundred nanoamps.

The TPS8269xSIP device can actively discharge the output capacitor when it turns off (refer to Ordering Information Table). The integrated discharge resistor has a typical resistance of 100 Ω. The required time to ramp-down the output voltage depends on the load current and the capacitance present at the output node.

APPLICATION INFORMATION

INPUT CAPACITOR SELECTION

Because of the pulsating input current nature of the buck converter, a low ESR input capacitor is required to prevent large voltage transients that can cause misbehavior of the device or interference in other circuits in the system.

For most applications, the input capacitor that is integrated into the TPS8269x should be sufficient. If the application exhibits a noisy or erratic switching frequency, experiment with additional input ceramic capacitance to find a remedy.

The TPS8269x uses a tiny ceramic input capacitor. When a ceramic capacitor is combined with trace or cable inductance, such as from a wall adapter, a load step at the output can induce ringing at the VIN pin. This ringing can couple to the output and be mistaken as loop instability or can even damage the part. In this circumstance, additional "bulk" capacitance, such as electrolytic or tantalum, should be placed between the input of the converter and the power source lead to reduce ringing that can occur between the inductance of the power source leads and C_I .

OUTPUT CAPACITOR SELECTION

The advanced, fast-response, voltage mode, control scheme of the TPS8269x allows the use of a tiny ceramic output capacitor (C_O). For most applications, the output capacitor integrated in the TPS8269x is sufficient.

At nominal load current, the device operates in PWM mode; the overall output voltage ripple is the sum of the voltage step that is caused by the output capacitor ESL and the ripple current that flows through the output capacitor impedance. At light loads, the output capacitor limits the output ripple voltage and provides holdup during large load transitions.

The TPS8269x is designed as a Point-Of-Load (POL) regulator, to operate stand-alone without requiring any additional capacitance. Adding a 4.7 μ F ceramic output capacitor (X7R or X5R dielectric) generally works from a converter stability point of view, helps to minimize the output ripple voltage in PFM mode and improves the converter's transient response under when input and output voltage are close together.

For best operation (i.e. optimum efficiency over the entire load current range, proper PFM/PWM auto transition), the TPS8269xSiP requires a minimum output ripple voltage in PFM mode. The typical output voltage ripple is ca. 1% of the nominal output voltage V_O . The PFM pulses are time controlled resulting in a PFM output voltage ripple and PFM frequency that depends (first order) on the capacitance seen at the MicroSiP™ DC/DC converter's output.

In applications requiring additional output bypass capacitors located close to the load, care should be taken to ensure proper operation. If the converter exhibits marginal stability or erratic switching frequency, experiment with additional low value series resistance (e.g. 50 to 100m Ω) in the output path to find a remedy.

Because the damping factor in the output path is directly related to several resistive parameters (e.g. inductor DCR, power-stage $r_{DS(on)}$, PWB DC resistance, load switches $r_{DS(on)}$...) that are temperature dependant, the converter small and large signal behavior must be checked over the input voltage range, load current range and temperature range.

The easiest sanity test is to evaluate, directly at the converter's output, the following aspects:

- PFM/PWM efficiency
- PFM/PWM and forced PWM load transient response

During the recovery time from a load transient, the output voltage can be monitored for settling time, overshoot or ringing that helps judge the converter's stability. Without any ringing, the loop has usually more than 45° of phase margin.

LAYOUT CONSIDERATION

In making the pad size for the SiP LGA balls, it is recommended that the layout use non-solder-mask defined (NSMD) land. With this method, the solder mask opening is made larger than the desired land area, and the opening size is defined by the copper pad width. Figure 34 shows the appropriate diameters for a MicroSiP™ layout.

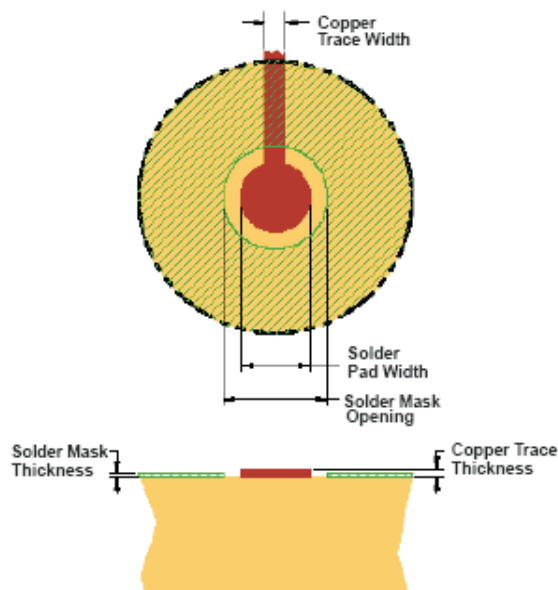


Figure 34. Recommended Land Pattern Image and Dimensions

| SOLDER PAD DEFINITIONS ⁽¹⁾⁽²⁾⁽³⁾⁽⁴⁾ | COPPER PAD | SOLDER MASK ⁽⁵⁾ OPENING | COPPER THICKNESS | STENCIL ⁽⁶⁾ OPENING | STENCIL THICKNESS |
|--|------------|------------------------------------|-------------------|--------------------------------|-------------------|
| Non-solder-mask defined (NSMD) | 0.30mm | 0.360mm | 1oz max (0.032mm) | 0.34mm diameter | 0.1mm thick |

- (1) Circuit traces from non-solder-mask defined PWB lands should be 75µm to 100µm wide in the exposed area inside the solder mask opening. Wider trace widths reduce device stand off and affect reliability.
- (2) Best reliability results are achieved when the PWB laminate glass transition temperature is above the operating the range of the intended application.
- (3) Recommend solder paste is Type 3 or Type 4.
- (4) For a PWB using a Ni/Au surface finish, the gold thickness should be less than 0.5mm to avoid a reduction in thermal fatigue performance.
- (5) Solder mask thickness should be less than 20 µm on top of the copper circuit pattern.
- (6) For best solder stencil performance use laser cut stencils with electro polishing. Chemically etched stencils give inferior solder paste volume control.

SURFACE MOUNT INFORMATION

The TPS8269x MicroSiP™ DC/DC converter uses an open frame construction that is designed for a fully automated assembly process and that features a large surface area for pick and place operations. See the "Pick Area" in the package drawings.

Package height and weight have been kept to a minimum thereby to allow the MicroSiP™ device to be handled similarly to a 0805 component.

See JEDEC/IPC standard J-STD-20b for reflow recommendations.

THERMAL INFORMATION

The die temperature of the TPS8269x must be lower than the maximum rating of 125°C, so care should be taken in the layout of the circuit to ensure good heat sinking of the TPS8269x.

To estimate the junction temperature, approximate the power dissipation within the TPS8269x by applying the typical efficiency stated in this datasheet to the desired output power; or, by taking a power measurement if you have an actual TPS8269x device and TPS8269xEVM evaluation module. Then calculate the internal temperature rise of the TPS8269x above the surface of the printed circuit board by multiplying the TPS8269x power dissipation by the thermal resistance.


The actual thermal resistance of the TPS8269x to the printed circuit board depends on the layout of the circuit board, but the thermal resistance given in the Thermal Information Table can be used as a guide.

Three basic approaches for enhancing thermal performance are listed below:

- Improve the power dissipation capability of the PCB design.
- Improve the thermal coupling of the component to the PCB.
- Introduce airflow into the system.

PACKAGE SUMMARY

SIP PACKAGE

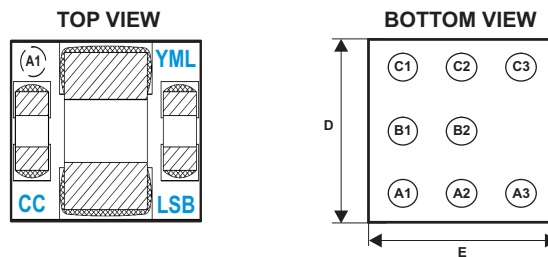

Code:

- CC — Customer Code (device/voltage specific)
- YML — Y: Year, M: Month, L: Lot trace code
- LSB — L: Lot trace code, S: Site code, B: Board locator

MicroSiP™ DC/DC MODULE PACKAGE DIMENSIONS

The TPS8269x device is available in an 8-bump ball grid array (BGA) package. The package dimensions are:

- D = 2.30 ±0.05 mm
- E = 2.90 ±0.05 mm

Note: Page numbers of current version may differ from previous versions.

| | |
|--|-------------|
| Changes from Original (June 2011) to Revision A | Page |
|--|-------------|

- | | |
|---|-------------------|
| • Deleted Product Preview status from TPS82695 device in Ordering Information table. | 2 |
|---|-------------------|

| | |
|---|-------------|
| Changes from Revision A (October 2011) to Revision B | Page |
|---|-------------|

- | | |
|--|-------------------|
| • Added device number TPS82697 | 1 |
| • Added Efficiency vs Load Current Graphs. Figure 3 and Figure 4 | 6 |

PACKAGING INFORMATION

| Orderable Device | Status (1) | Package Type | Package Drawing | Pins | Package Qty | Eco Plan (2) | Lead/Ball Finish | MSL Peak Temp (3) | Op Temp (°C) | Device Marking (4/5) | Samples |
|------------------|---------------|--------------|--------------------|------|----------------|----------------------------|------------------|----------------------|--------------|-------------------------|-------------------------|
| TPS82690SIPR | PREVIEW | uSiP | SIP | 8 | 3000 | TBD | Call TI | Call TI | -40 to 85 | RC TXI690 | |
| TPS82690SIPT | PREVIEW | uSiP | SIP | 8 | 250 | TBD | Call TI | Call TI | -40 to 85 | | |
| TPS82695SIPR | ACTIVE | uSiP | SIP | 8 | 3000 | Green (RoHS & no Sb/Br) | Call TI | Level-2-260C-1 YEAR | -40 to 85 | UF TXI695 | Samples |
| TPS82695SIPT | ACTIVE | uSiP | SIP | 8 | 250 | Green (RoHS & no Sb/Br) | Call TI | Level-2-260C-1 YEAR | -40 to 85 | UF TXI695 | Samples |
| TPS826970SIPR | PREVIEW | uSiP | SIP | 8 | 3000 | TBD | Call TI | Call TI | -40 to 85 | | |
| TPS826970SIPT | PREVIEW | uSiP | SIP | 8 | 250 | TBD | Call TI | Call TI | -40 to 85 | | |
| TPS82697SIPR | PREVIEW | uSiP | SIP | 8 | 3000 | Green (RoHS & no Sb/Br) | Call TI | Level-2-260C-1 YEAR | -40 to 85 | C2 TXI697 | |
| TPS82697SIPT | PREVIEW | uSiP | SIP | 8 | 250 | Green (RoHS & no Sb/Br) | Call TI | Level-2-260C-1 YEAR | -40 to 85 | C2 TXI697 | |

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

⁽⁵⁾ Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION


*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TPS82695SIPR | uSiP | SIP | 8 | 3000 | 178.0 | 9.0 | 2.45 | 3.05 | 1.1 | 4.0 | 8.0 | Q2 |

TAPE AND REEL BOX DIMENSIONS




*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|--------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TPS82695SIPR | uSiP | SIP | 8 | 3000 | 223.0 | 194.0 | 35.0 |

TPS62670SiP, TPS62690SiP, TPS82671SiP, TPS82675SiP

SIP (R-uSiP-N8)

MicroSiP™

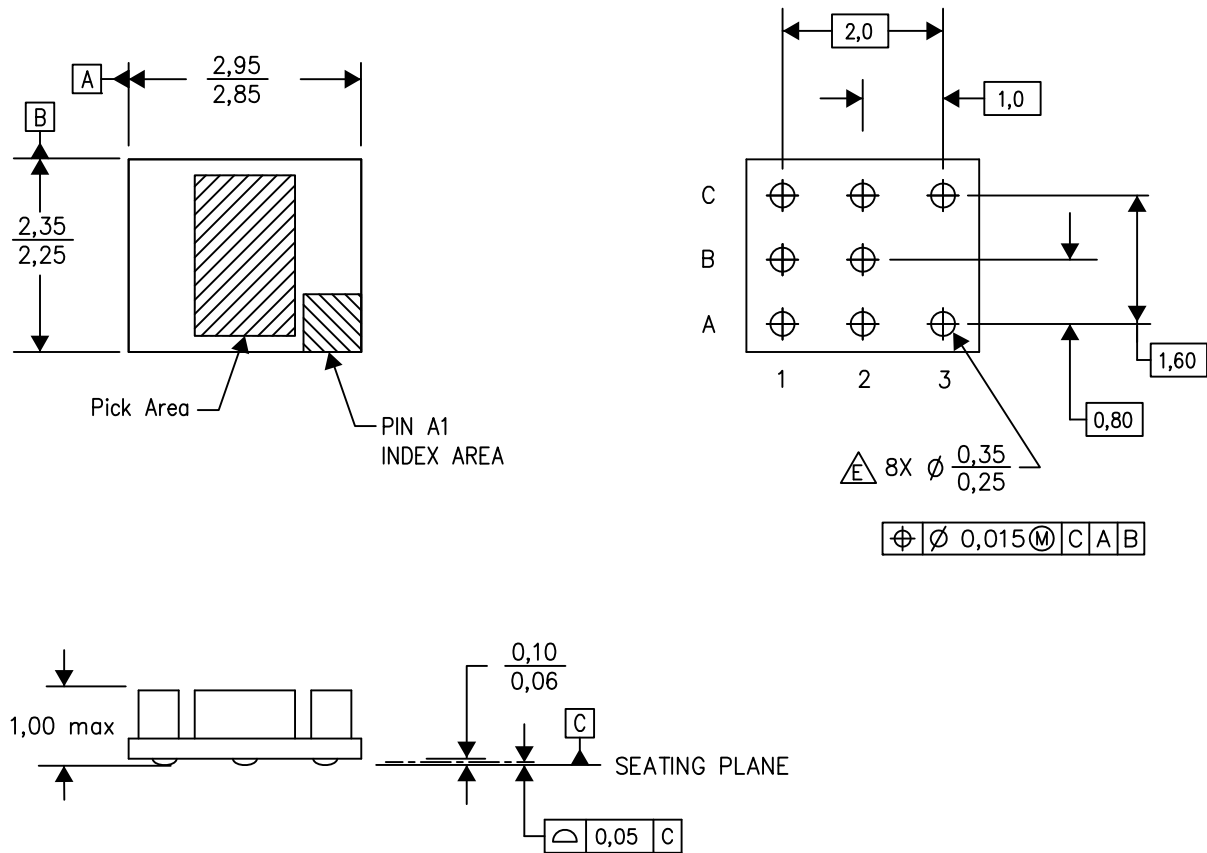

4210871-2/E 05/12

- NOTES:
- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
 - B. This drawing is subject to change without notice.
 - C. MicroSiP™ package configuration - Micro System in Package.
 - D. Reference Product Data Sheet for array population.
3 x 3 matrix pattern is shown for illustration only.
 - E. This package contains Pb-free balls.

MicroSiP is a trademark of Texas Instruments

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products

| | |
|------------------------------|--|
| Audio | www.ti.com/audio |
| Amplifiers | amplifier.ti.com |
| Data Converters | dataconverter.ti.com |
| DLP® Products | www.dlp.com |
| DSP | dsp.ti.com |
| Clocks and Timers | www.ti.com/clocks |
| Interface | interface.ti.com |
| Logic | logic.ti.com |
| Power Mgmt | power.ti.com |
| Microcontrollers | microcontroller.ti.com |
| RFID | www.ti-rfid.com |
| OMAP Applications Processors | www.ti.com/omap |
| Wireless Connectivity | www.ti.com/wirelessconnectivity |

Applications

| | |
|-------------------------------|--|
| Automotive and Transportation | www.ti.com/automotive |
| Communications and Telecom | www.ti.com/communications |
| Computers and Peripherals | www.ti.com/computers |
| Consumer Electronics | www.ti.com/consumer-apps |
| Energy and Lighting | www.ti.com/energy |
| Industrial | www.ti.com/industrial |
| Medical | www.ti.com/medical |
| Security | www.ti.com/security |
| Space, Avionics and Defense | www.ti.com/space-avionics-defense |
| Video and Imaging | www.ti.com/video |

TI E2E Community

e2e.ti.com