

TOSHIBA Insulated Gate Bipolar Transistor Silicon N Channel IGBT

GT10G131

Strobe Flash Applications

- Supplied in compact and thin package requires only a small mounting area
- 5th generation (trench gate structure) IGBT
- Enhancement-mode
- 4-V gate drive voltage: $V_{GE} = 4.0 \text{ V (min)}$ (@ $I_C = 200 \text{ A}$)
- Peak collector current: $I_C = 200 \text{ A (max)}$
- Built-in zener diode between gate and emitter
- SOP-8 package

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)


Characteristics	Symbol	Rating	Unit
Collector-emitter voltage	V_{CES}	400	V
Gate-emitter voltage	DC	V_{GES}	± 6
	Pulse	V_{GES}	± 8
Collector current	Pulse (Note 1)	I_{CP}	200
Collector power dissipation($t=10 \text{ s}$)	(Note 2a)	$P_C (1)$	1.9
	(Note 2b)	$P_C (2)$	1.0
Junction temperature	T_j	150	$^\circ\text{C}$
Storage temperature range	T_{stg}	$-55 \sim 150$	$^\circ\text{C}$

Note: Using continuously under heavy loads (e.g. the application of high temperature/current/voltage and the significant change in temperature, etc.) may cause this product to decrease in the reliability significantly even if the operating conditions (i.e. operating temperature/current/voltage, etc.) are within the absolute maximum ratings. Please design the appropriate reliability upon reviewing the Toshiba Semiconductor Reliability Handbook ("Handling Precautions"/Derating Concept and Methods) and individual reliability data (i.e. reliability test report and estimated failure rate, etc.).

Thermal Characteristics


Characteristics	Symbol	Rating	Unit
Thermal resistance, junction to ambient ($t = 10 \text{ s}$) (Note2a)	$R_{th(j-a)} (1)$	65.8	$^\circ\text{C/W}$
Thermal resistance, junction to ambient ($t = 10 \text{ s}$) (Note2b)	$R_{th(j-a)} (2)$	125	$^\circ\text{C/W}$

Marking (Note 3)

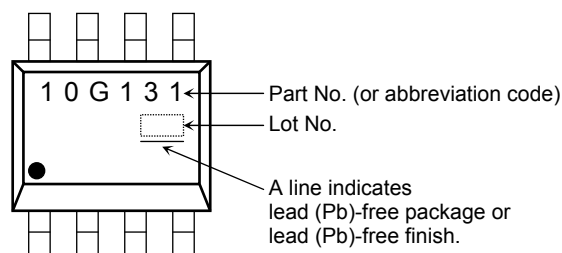


Note : For (Note 1) , (Note 2a) , (Note 2b) and (Note 3) , Please refer to the next page.

Unit: mm

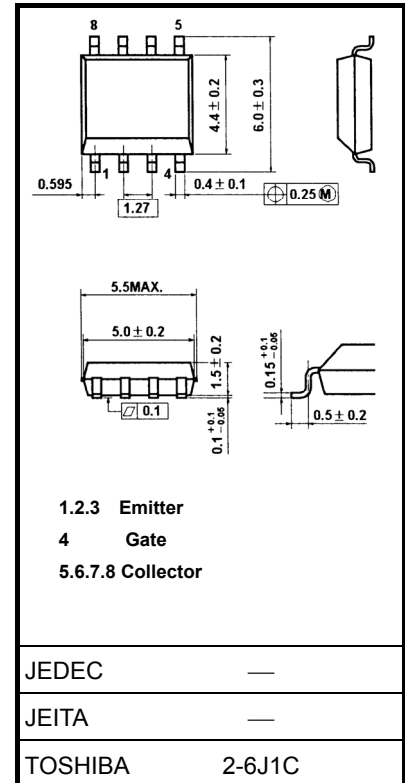


Weight: 0.08 g (typ.)

Circuit Configuration




Electrical Characteristics (Ta = 25°C)

Characteristics		Symbol	Test Condition	Min	Typ.	Max	Unit
Gate leakage current		I_{GES}	$V_{GE} = \pm 6 \text{ V}, V_{CE} = 0$	—	—	± 10	μA
Collector cut-off current		I_{CES}	$V_{CE} = 400 \text{ V}, V_{GE} = 0$	—	—	10	μA
Gate-emitter cut-off voltage		$V_{GE}(\text{OFF})$	$I_C = 1 \text{ mA}, V_{CE} = 5 \text{ V}$	0.6	0.9	1.2	V
Collector-emitter saturation voltage		$V_{CE}(\text{sat})$	$I_C = 200 \text{ A}, V_{GE} = 4 \text{ V}$	—	2.3	—	V
Input capacitance		C_{ies}	$V_{CE} = 10 \text{ V}, V_{GE} = 0, f = 1 \text{ MHz}$	—	2800	—	pF
Switching time	Rise time	t_r		—	2.8	—	μs
	Turn-on time	t_{on}		—	3.1	—	
	Fall time	t_f		—	1.8	—	
	Turn-off time	t_{off}		—	2.0	—	

Note

Note 1: Please use devices on condition that the junction temperature is below 150°C.
 Repetitive rating: pulse width limited by maximum junction temperature.


Note 2a : Device mounted on
 a glass-epoxy board (a)



↑ ↑ ↑
 for COLLECTOR
 for EMITTER
 for GATE

FR-4
 25.4 × 25.4 × 0.8
 (Unit: mm)

Note 2b : Device mounted on
 a glass-epoxy board (b)



↑ ↑ ↑
 for GATE
 for COLLECTOR
 for EMITTER

FR-4
 25.4 × 25.4 × 0.8
 (Unit: mm)

Note 3: ○ on lower right of the marking indicates Pin 1.

※ Weekly code: (Three digits)



Week of manufacture
 (01 for first week of year, continues up to 52 or 53)
 Year of manufacture
 (One low-order digits of calendar year)

※ Pb-Free Finish (Only a coating lead terminal) :
 It is marking about an underline to a week of manufacture mark.



Caution on handling

This device is MOS gate type. Therefore , please care of a protection from ESD in your handling .

Caution in design


You should be design dV/dt value is below 400 V/μs when IGBT turn off.

●definition of dv/dt


The slope of vce from 30v to 90v (attached figure.1)







$$\begin{aligned} dv/dt &= (90V-30V) / (\Delta t) \\ &= 60V / \Delta t \end{aligned}$$







●waveform


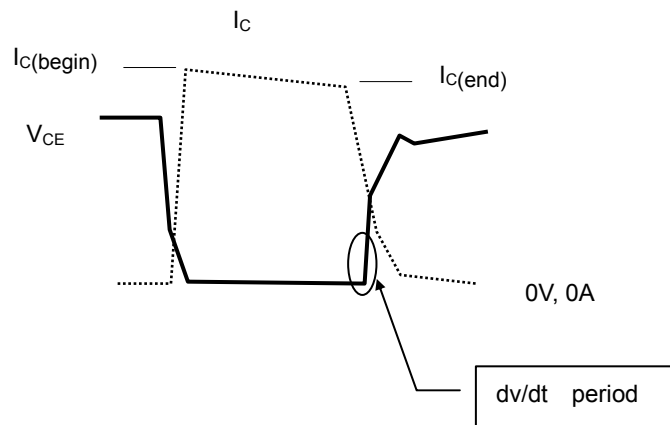


●waveform (expansion)

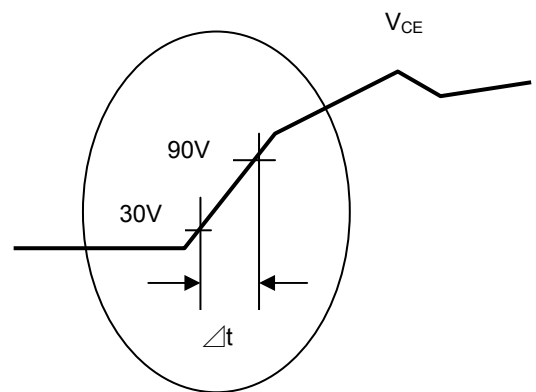

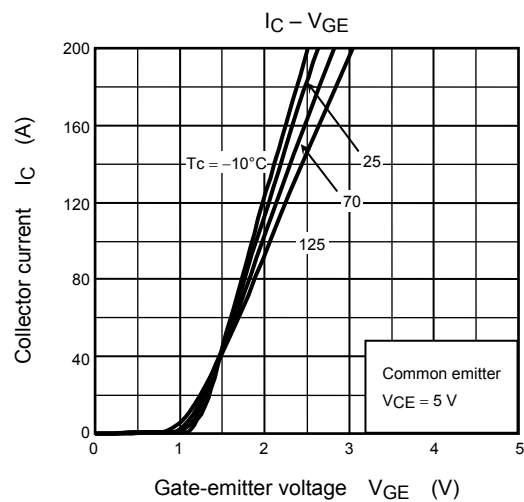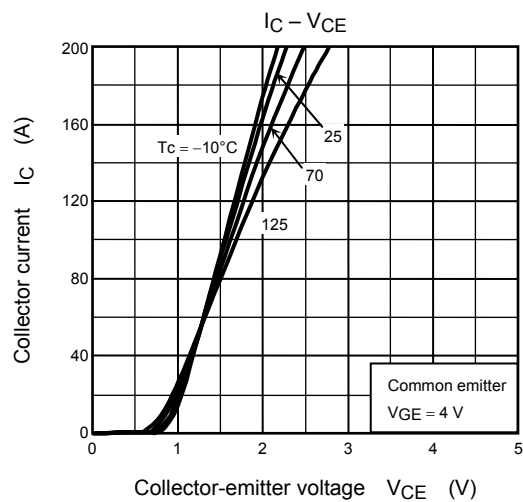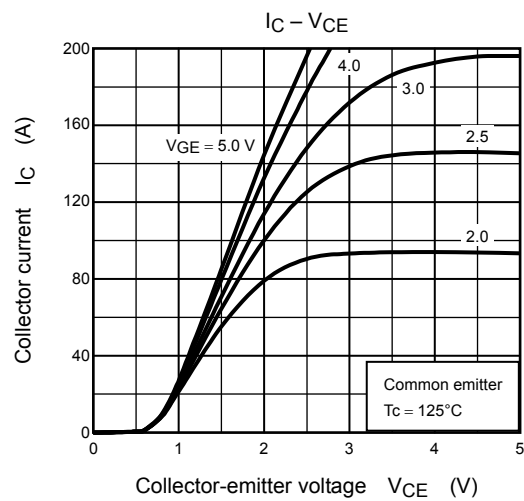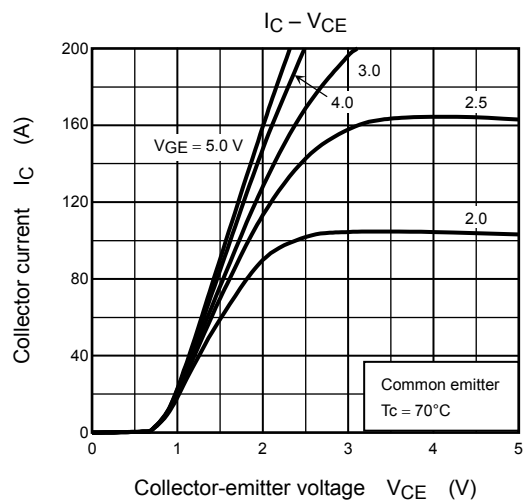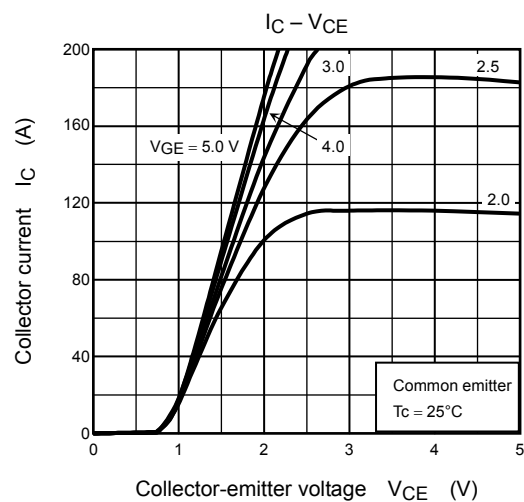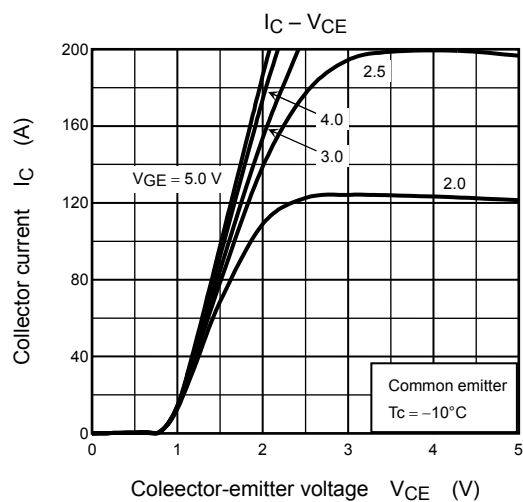

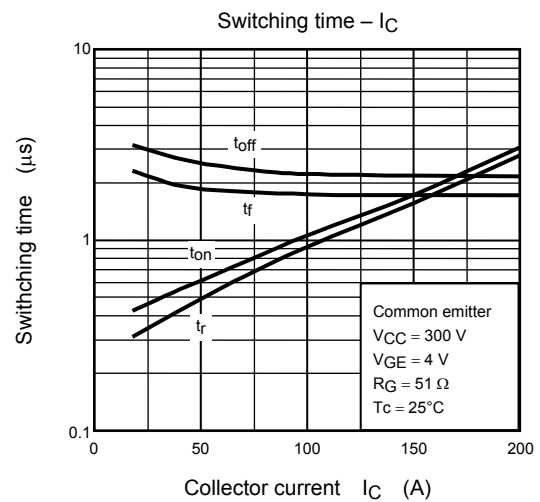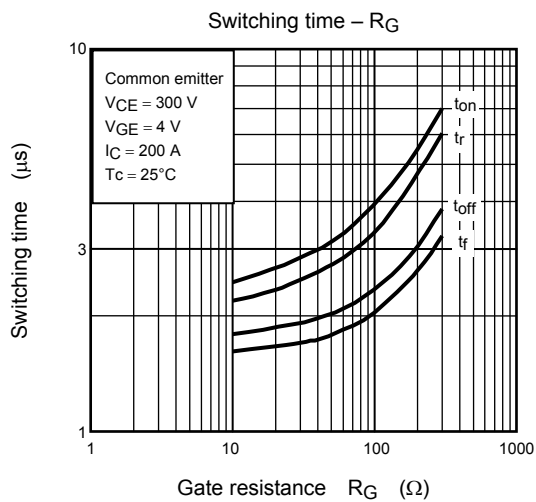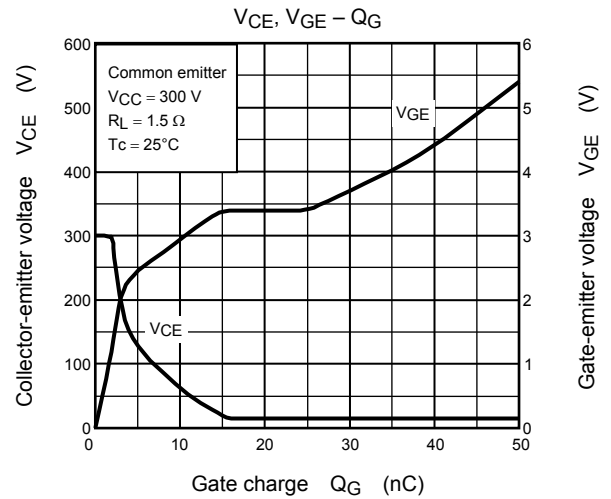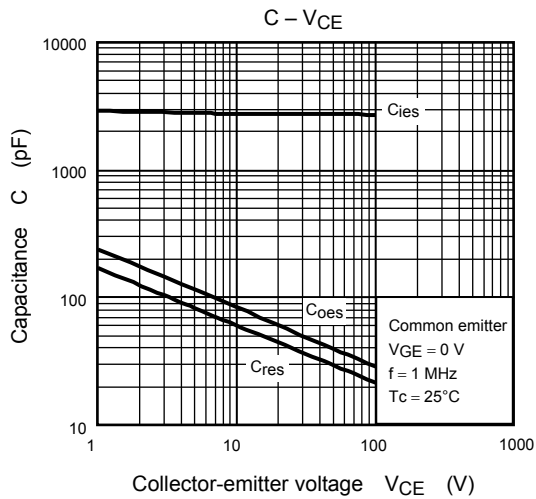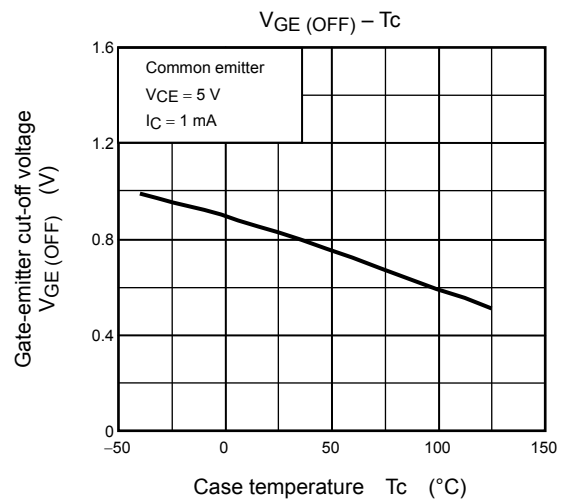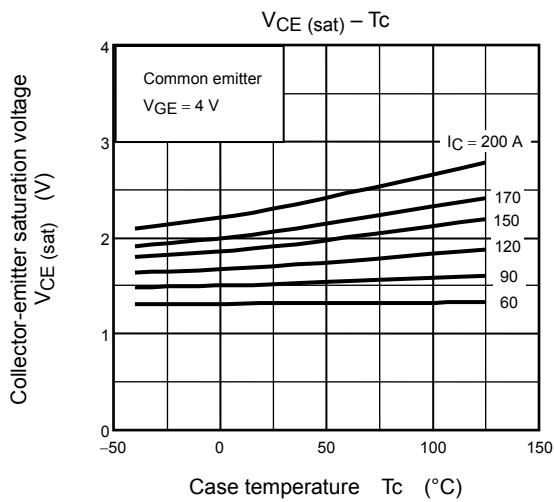

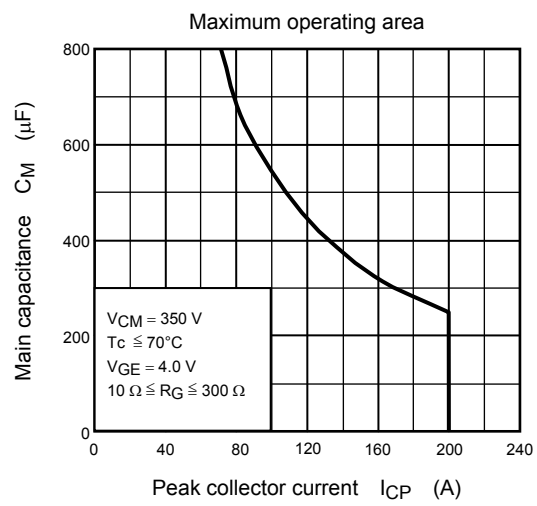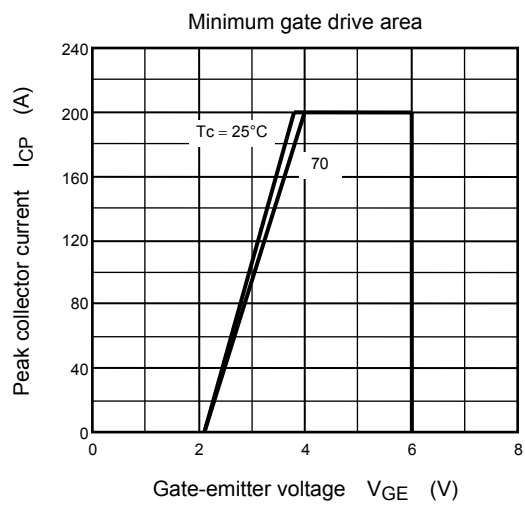

RESTRICTIONS ON PRODUCT USE

20070701-EN

- The information contained herein is subject to change without notice.
- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc.
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document shall not be used or embedded to any downstream products of which manufacture, use and/or sale are prohibited under any applicable laws and regulations.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patents or other rights of TOSHIBA or the third parties.
- Please contact your sales representative for product-by-product details in this document regarding RoHS compatibility. Please use these products in this document in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances. Toshiba assumes no liability for damage or losses occurring as a result of noncompliance with applicable laws and regulations.