



## Features

- Economical ESD protective product to replace high charging plastic trash cans
- Static dissipative, low charging dissipative surface
- Constructed with double sides, triple ends, and double thickness bottom for greater durability (Items 37810, 37811)
- Steel reinforcing frame provides additional strength and durability
- Conductive plastic handles provide ease of handling along with reliable ESD control path-to-ground
- Identified with ESD Protective Symbol (Ref: ESD 8.1) (Items 37810, 37811)
- Easy assembly without the need for tape, glue, or staples
- ESD protective liners also available
- Impregnated corrugated material; greater durability than coated or printed material
- Static dissipative surface of  $10E6 - 10E8$  ohms\*
- Buried shielding layer minimizes sloughing and rub-off contamination
- Made from 100% recycled material, and is 100% recyclable

## SPECIFICATIONS

### Properties

Electrostatic Decay  
Surface Resistance

Surface Resistance, Low R.H. Cut-off

High-Voltage Discharge Resistance

Static Shielding

Charged Device Model (CDM) Safety

Current-Carrying Hazard

Corrosivity

Antistat Transfer

Water & Isopropyl Alcohol Extraction  
Tests for Antistat Permanence

Sloughing Test

Recyclability

Biodegradability

Volume Conductivity

Shelf Life

### Typical Values

0.01 seconds at 72°F and 11.8% R.H.

$10E6 - 10E8$  ohms/sq. after 11 days at 68°F and 12% R.H.  
for surface.  $10E3 - 10E4$  ohms/sq. for buried shielding layer  
4% R.H.

Failure rate 0/5 (no oxide damage in five consecutive tests)

99.9% attenuation at 10kV; 99.6% attenuation at 30kV

RTT  $10EG-10SP$  ohms

$10E3$  mA at 110V;  $10E3$  mA at 220V

Contains 1-3 ppm reducible sulfur

No transfer

Surface resistance  $10E8 - 10E9$  ohms/square at 74°F  
and 36% R.H.

Negligible surface damage at 10 cycles and <5% of surface  
damage at 200 cycles in Taber Abrasion Test.

No conductive particles abraded from surface

Complete recyclability of package

Biodegradation in or on moist soil

Conductivity from wall to wall as well as across surface  
to assure permanence of the antistatic property

Indefinite

### Test Procedures/Method

FED-STD-101, Method 4046

ASTM D257

Rockwell International Test Report of December 20, 1991

Rockwell International Test Report of December 20, 1991

EIA 541, appendix E, capacitive probe test

Rockwell International Test Report of December 20, 1991

ESD from A to Z

FED-STD-101, Method 3005 for reducible sulfur

Rockwell International Test Report of January 8, 1992

Rockwell International Test Report of January 8, 1992

ASTM D4060 at 70 rpm with CS-17 abrasive-coated  
wheels and 1000 grams load

Rockwell International Test Report of January 8, 1992

Rockwell International Test Report of January 8, 1992

Rockwell International Test Report of January 8, 1992



Made in America

## Protektive Pak® ESD Trash Receptacle


**PROTEKTIVE PAK**  
**BURIED SHIELDING LAYER**

PROTEKTIVE PAK  
13520 MONTE VISTA AVENUE, CHINO, CA 91710  
PHONE (909) 627-2578, FAX (909) 363-7331  
ProtektivePak.com


**DRAWING NUMBER**  
37810

**DATE:**  
March  
2009


## Bottom Folding Instructions For Part Numbers 37812 & 37813

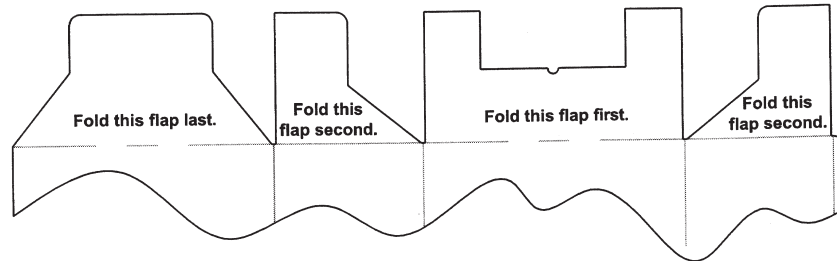


## Wire Assembly Instructions

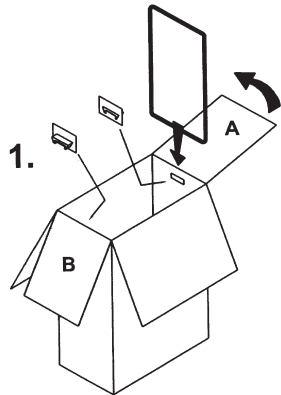


1. Insert handles before folding up box. Place shorter dimension of wire on crease where flap A & box meet.

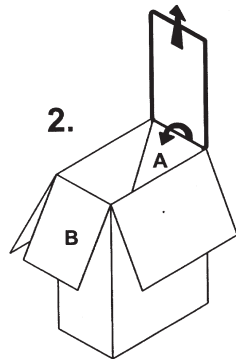


2. Insert flap A into wire. Fold flap A over short dimension of wire & completely into box while pulling the wire up. Make sure wire is within corner notches of flap.



3. Bring down the wire to the other side of the box and fold over flap B. Check to make sure that the wire is at the top of the box tucked under the flaps.



4. Fold flaps C & D at their middle creases and then fold them down into the box.



5. Make sure all flaps interlock with each other.

Item	Description (L x W x D)
37810	Trash Receptacle 13-1/2 x 12 x 13-1/4, 9 gal., with wire frame and handles
37811	Trash Receptacle 13-1/2 x 12 x 13-1/4, 9 gal., receptacle only
37812	Trash Receptacle 22-7/8 x 12-7/8 x 32, 40 gal., with wire frame and handles
37813	Trash Receptacle 22-7/8 x 12-7/8 x 32, 40 gal., receptacle only
37820	Trash Liner/ 10 gal. 26 x 24, 1.5 mil thickness
37821	Trash Liner/ 55 gal. 22 x 16 x 58, 1.5 mil thickness

"It should be understood that any object, item, material or person could be a source of static electricity in the work environment. Removal of unnecessary nonconductors, replacing nonconductive materials with dissipative or conductive materials and grounding all conductors are the principle methods of controlling static electricity in the workplace, regardless of the activity." (ESD Handbook TR 20.20 section 2.4)