


Male Crimp Reverse Fix

- ❖ Mates with female connectors shown on pages 40, 43, 45 and 46.
- ❖ Allows for further flexibility in system design.
- ❖ Crimp contacts supplied loose.
- ❖ Crimp contacts are rear insertable and replaceable.
- ❖ Large Bore 22 AWG, Small Bore 24 – 28 AWG.
- ❖ Part numbers are for housings and the equivalent number of contacts.
- ❖ Spare contacts are available – see page 65.



REVERSE FIX

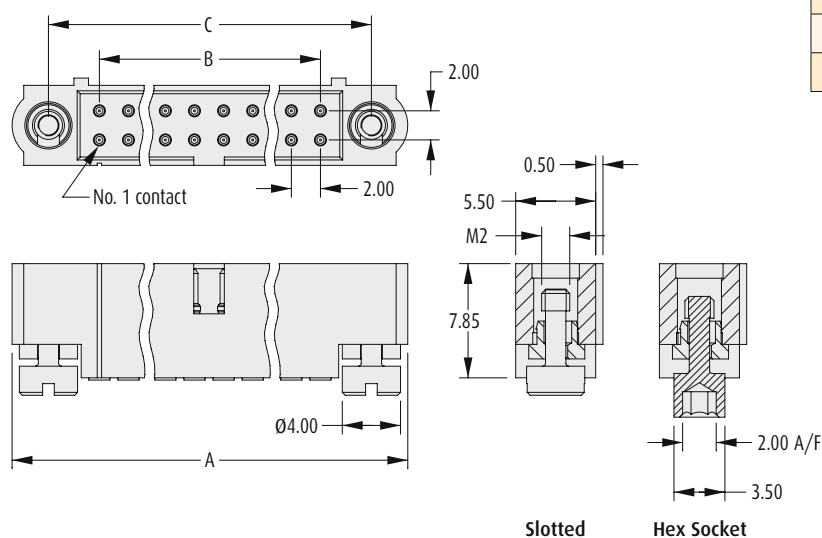


CALCULATION

| | |
|----------|---------------------------|
| A | $B + 12$ |
| B | Total no. of contacts - 2 |
| C | $B + 7$ |

TOOLS

Recommended Crimp Tool – M22520/2-01
Positioner – Z80-193
Contact Insertion/Removal Tool – Z80-280
 See pages 87 to 89
 ❖ Instruction sheets available at www.harwin.com/downloads/instructions

WIRE STRIPPING DETAILS

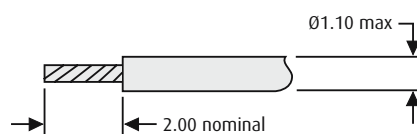

HOW TO ORDER

M80 - XXX XX 05

SERIES CODE

| TYPE | |
|------------|----------------------------------|
| 562 | Large Bore, Slotted Jackscrew |
| 563 | Small Bore, Slotted Jackscrew |
| 582 | Large Bore, Hex Socket Jackscrew |
| 583 | Small Bore, Hex Socket Jackscrew |

FINISH

05 Gold

TOTAL NO. OF CONTACTS

04 to 50

Even numbers only

All dimensions in mm.