



SAW Components


SAW RF filter

Short range devices

Series/type:	B3728
Ordering code:	B39921B3728U410
Date:	April 23, 2013
Version:	2.2


Application

- Low-loss RF filter for remote control receivers
- No matching network required for operation at 50 Ω




Features

- Package size 3.0 x 3.0 x 1.1 mm³
- Package code DCC6C
- RoHS compatible
- Approximate weight 0.037 g
- Package for **Surface Mount Technology (SMT)**
- Ni, gold-plated terminals
- Lead free soldering compatible with J - STD20C
- AEC-Q200 qualified component family
- **Electrostatic Sensitive Device (ESD)**

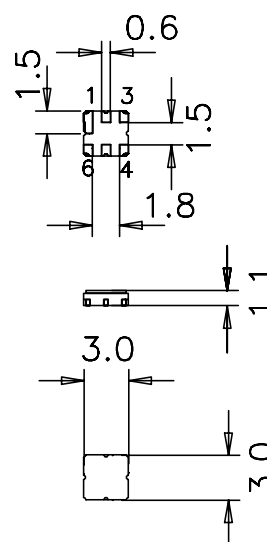

Pin configuration

- 2 Input
- 5 Output
- 1,3,4,6 Ground

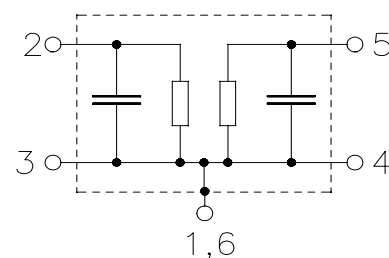

Data sheet

Characteristics

Reference temperature for specification: $T = +25\text{ °C}$

Terminating source impedance: $Z_S = 50\ \Omega$

Terminating load impedance: $Z_L = 50\ \Omega$

		min.	typ. @ 25 °C	max.	
Center frequency	f_C	—	915.00	—	MHz
Maximum insertion attenuation	α_{\max}				
902.00 ... 928.00 MHz		—	2.2	2.6	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
902.00 ... 928.00 MHz		—	1.4	1.8	dB
VSWR					
Input 902.00 ... 928.00 MHz		—	1.7	2.0	
Output 902.00 ... 928.00 MHz		—	1.8	2.0	
Attenuation					
10.00 ... 800.00 MHz		35	38	—	dB
800.00 ... 888.00 MHz		39	41	—	dB
888.00 ... 890.00 MHz		35	40	—	dB
890.00 ... 894.00 MHz		15	22	—	dB
940.00 ... 941.00 MHz		45	53	—	dB
941.00 ... 967.00 MHz		50	52	—	dB
967.00 ... 1350.00 MHz		40	42	—	dB
1350.00 ... 1600.00 MHz		35	37	—	dB
1600.00 ... 2000.00 MHz		30	33	—	dB
2000.00 ... 2500.00 MHz		28	31	—	dB

Data sheet

Characteristics

Temperature range for specification: $T = -25\text{ °C to }+75\text{ °C}$
 Terminating source impedance: $Z_S = 50\ \Omega$
 Terminating load impedance: $Z_L = 50\ \Omega$

		min.	typ. @ 25 °C	max.	
Center frequency	f_C	—	915.00	—	MHz
Maximum insertion attenuation	α_{\max}				
902.00 ... 928.00 MHz		—	2.2	3.6	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
902.00 ... 928.00 MHz		—	1.4	2.8	dB
VSWR					
Input 902.00 ... 928.00 MHz		—	1.7	2.0	
Output 902.00 ... 928.00 MHz		—	1.8	2.0	
Attenuation					
10.00 ... 800.00 MHz		35	38	—	dB
800.00 ... 888.00 MHz		37	41	—	dB
888.00 ... 890.00 MHz		26	40	—	dB
890.00 ... 894.00 MHz		6	22	—	dB
940.00 ... 941.00 MHz		31	53	—	dB
941.00 ... 967.00 MHz		40	52	—	dB
967.00 ... 1350.00 MHz		38	42	—	dB
1350.00 ... 1600.00 MHz		35	37	—	dB
1600.00 ... 2000.00 MHz		30	33	—	dB
2000.00 ... 2500.00 MHz		28	31	—	dB

Data sheet

Characteristics

Temperature range for specification: $T = -40\text{ °C to }+85\text{ °C}$
 Terminating source impedance: $Z_S = 50\ \Omega$
 Terminating load impedance: $Z_L = 50\ \Omega$

		min.	typ. @ 25 °C	max.	
Center frequency	f_C	—	915.00	—	MHz
Maximum insertion attenuation	α_{\max}	—	2.2	4.0	dB
902.00 ... 928.00 MHz					
Amplitude ripple (p-p)	$\Delta\alpha$	—	1.4	3.2	dB
902.00 ... 928.00 MHz					
VSWR					
Input	902.00 ... 928.00 MHz	—	1.7	2.0	
Output	902.00 ... 928.00 MHz	—	1.8	2.0	
Attenuation					
10.00 ... 800.00 MHz		35	38	—	dB
800.00 ... 888.00 MHz		36	41	—	dB
888.00 ... 890.00 MHz		26	40	—	dB
890.00 ... 894.00 MHz		5	22	—	dB
940.00 ... 941.00 MHz		27	53	—	dB
941.00 ... 967.00 MHz		35	52	—	dB
967.00 ... 1350.00 MHz		38	42	—	dB
1350.00 ... 1600.00 MHz		35	37	—	dB
1600.00 ... 2000.00 MHz		30	33	—	dB
2000.00 ... 2500.00 MHz		28	31	—	dB

Maximum ratings

Operable temperature range	T	−45/+125	°C	
Storage temperature range	T_{stg}	−45/+125	°C	
DC voltage	V_{DC}	6	V	
Source power	P_S	15	dBm	source impedance 50 Ω
Source power	P_S	18	dBm	duty cycle 1:10,
902 MHz to 928 MHz				−40 °C to +85 °C

ESD protection of SAW filters

SAW filters are **E**lectro **S**tatic **D**ischarge sensitive devices. To reduce the probability of damages caused by ESD, special matching topologies have to be applied.

In general, “ESD matching” has to be ensured at that filter port, where electrostatic discharge is expected.

Electrostatic discharges predominantly appear at the antenna input of RF receivers. Therefore only the input matching of the SAW filter has to be designed to short circuit or to block the ESD pulse.

Below three figures show recommended “ESD matching” topologies.

For wideband filters the high-pass ESD matching structure needs to be at least of 3rd order to ensure a proper matching for any impedance value of antenna and SAW filter input. The required component values have to be determined from case to case.

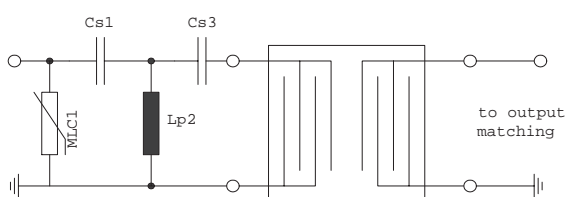


Fig. 1 MLC varistor plus ESD matching

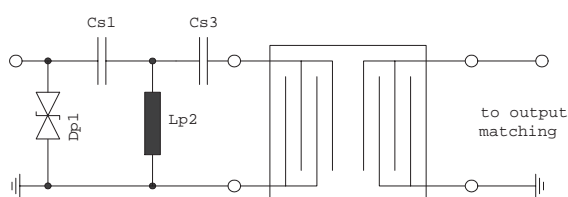


Fig. 2 Suppressor diode plus ESD matching

In cases where minor ESD occur, following simplified “ESD matching” topologies can be used alternatively.

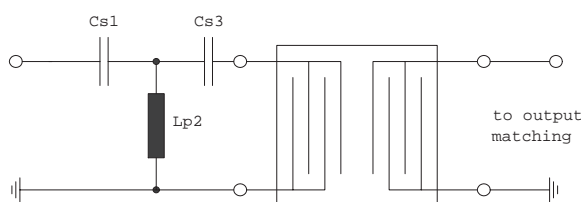


Fig. 3 3rd order high-pass structure for basic ESD protection



In all three figures the shunt inductor Lp2 could be replaced by a shorted microstrip with proper length and width. If this configuration is possible depends on the operating frequency and available pcb space.

Effectiveness of the applied ESD protection has to be checked according to relevant industry standards or customer specific requirements

For further information, please refer to EPCOS Application report:

“ESD protection for SAW filters”.

This report can be found under www.epcos.com/rke. Click on “Applications Notes”.

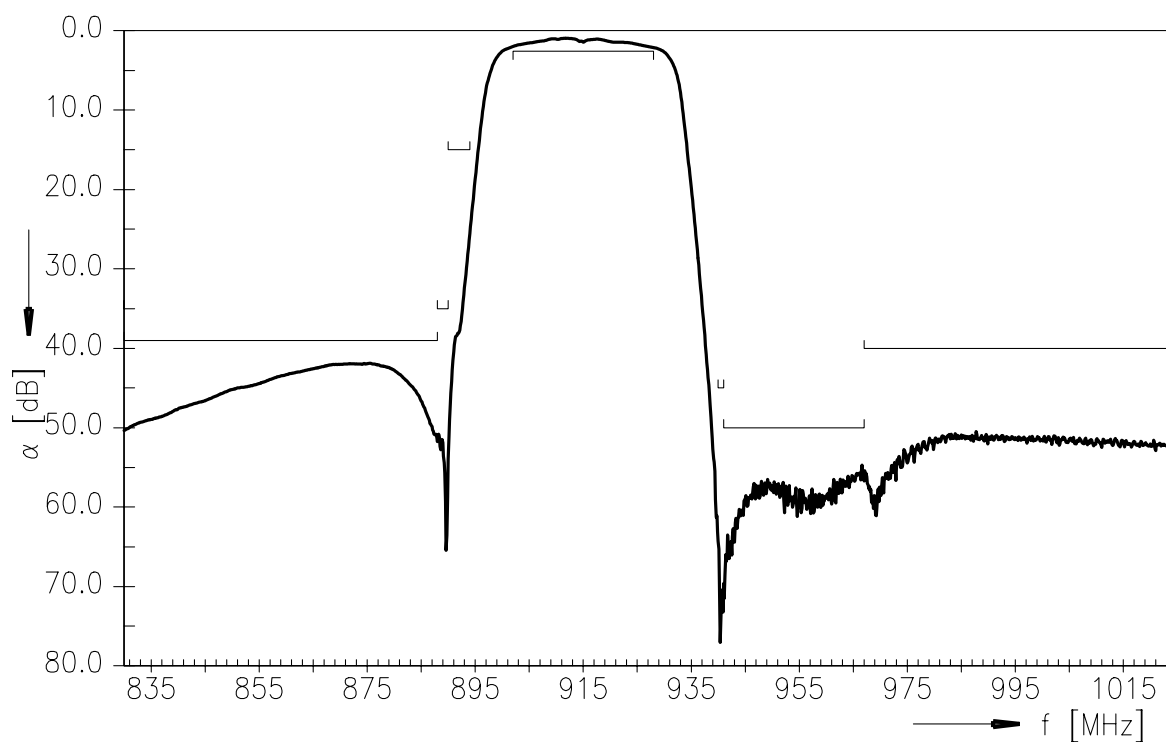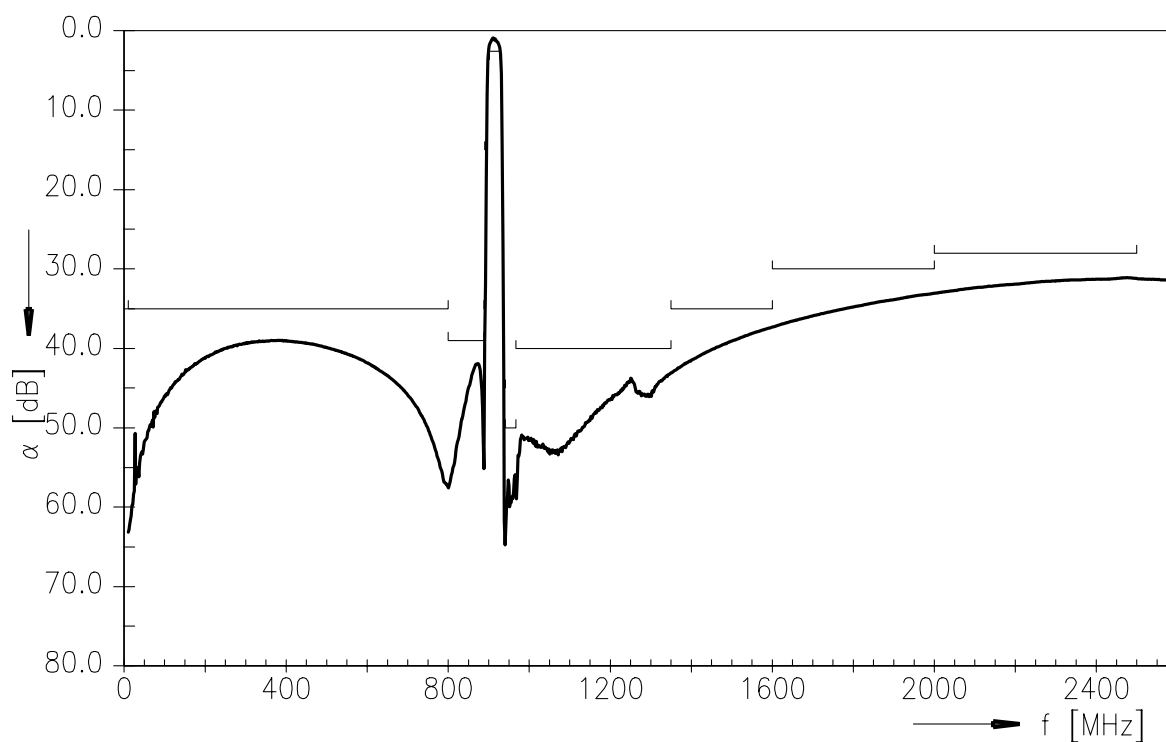Transfer function

Transfer function (wideband)


References

Type	B3728
Ordering code	B39921B3728U410
Marking and package	C61157-A7-A67
Packaging	F61074-V8168-Z000
Date codes	L_1126
S-parameters	B3728_NB.s2p, B3728_WB.s2p see file header for port/pin assignment table
Soldering profile	S_6001
RoHS compatible	RoHS-compatible means that products are compatible with the requirements according to Art. 4 (substance restrictions) of Directive 2011/65/EU of the European Parliament and of the Council of June 8 th , 2011, on the restriction of the use of certain hazardous substances in electrical and electronic equipment ("Directive") with due regard to the application of exemptions as per Annex III of the Directive in certain cases.
Matching coils	See Inductor pdf-catalog http://www.tdk.co.jp/tefe02/coil.htm#aname1 and Data Library for circuit simulation http://www.tdk.co.jp/etvcl/index.htm

For further information please contact your local EPCOS sales office or visit our webpage at www.epcos.com.

Published by EPCOS AG

Systems, Acoustics, Waves Business Group

P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2013. This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.

Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet (www.epcos.com/material). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
6. Unless otherwise agreed in individual contracts, **all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI)**.
7. The trade names EPCOS, BAOKE, Alu-X, CeraDiode, CeraLink, CSMP, CSSP, CTVS, DeltaCap, DigiSiMic, DSSP, FilterCap, FormFit, MiniBlue, MiniCell, MKD, MKK, MLSC, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, SIP5D, SIP5K, ThermoFuse, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at www.epcos.com/trademarks.