

Aluminum electrolytic capacitors

Axial-lead and soldering star capacitors

Series/Type: B41694, B41794

Date: February 2011

© EPCOS AG 2011. Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.



Axial-lead and soldering star capacitors

B41694, B41794

Low ESR - up to 140 °C

Applications

For automotive applications with high EMV requirementes

Features

- Very high ripple current capability
- Very low ESR at temperatures down to -55 °C
- High vibration resistance
- High reliability of 1000 h at up to 140 °C
- Shelf life up to 15 years at storage temperatures up to 40 °C. To ensure solderability, the capacitors should be built into the application within one year of delivery. After a total of two years' storage, the operating voltage must be applied for one hour to ensure the specified leakage current.



Construction

- Charge/discharge-proof, polar
- Aluminum case with insulating sleeve
- Negative pole connected to case

Terminals

- Axial leads, welded to ensure perfect electrical contact
- Also available with soldering stars

Taping and Packing

- Axial-lead capacitors will be delivered in pallet package. Capacitors with d × l ≤ 16 × 30 mm are also available taped on reel.
- Soldering star capacitors are packed in cardboard.



Low ESR - up to 140 °C



Specifications and characteristics in brief

| Rated voltage V _B | 25 and 40 V D0 | 3 | | | | | |
|--|---|--|--|---|-----------------------------|---|---------|
| Surge voltage V _S | 1.15 · V _B | | | | | | |
| Rated capacitance C _R | 330 3900 µF | | | | | | |
| Capacitance tolerance | -10/+30% ≙ Q | | | | | | |
| Leakage current I _{leak} (5 min, 20 °C) | | $\mu A \cdot \left(\frac{C_R}{\mu F} \cdot \frac{V_R}{V}\right) +$ | 4 μΑ | | | | |
| Self-inductance ESL ¹⁾ | Diameter d (mr | m) | 12 | 14 | 16 | 18 | 20/21 |
| | Terminals | Length I (mm) | Appro | x. ESL (| nH) | | |
| | axial | 25 | _ | 22 | - | _ | _ |
| | | 29 | _ | - | _ | _ | 38 |
| | | 30 | 21 | 24 | 29 | 34 | _ |
| | | 39 | _ | _ | 33 | 38 | 45 |
| | | 49 | _ | _ | - | - | 50 |
| | soldering star | 25 | _ | 6 | _ | - | _ |
| | | 30 | 6 | 7 | 8 | 10 | _ |
| | | 39 | - | _ | 9 | 11 | 13 |
| | | 49 | _ | _ | _ | _ | 14 |
| Useful life | | • | Requirements: | | | | |
| 140 °C; V _R ; I _{AC,R} | > 1000 h | | ΔC/C | ≤ ±30% of initial value | | | |
| 125 °C; V _R ; I _{AC, R} | > 3000 h | | ESR | \leq 3 times initial specified limit | | | |
| 85 °C; V_R ; $I_{AC, max}$ | > 8000 h | | I _{leak} | ≤initia | ıl specifi | ied limit | |
| 40 °C; V_R ; 2.1 · $I_{AC, R}$ | > 200000 h | | | | | | |
| Voltage endurance test | | | Post te | est requ | irement | s: | |
| 125 °C; V _R | 2000 h | | ΔC/C | ≤ ±10° | % of init | ial value |) |
| | | | | | (initial o | specifie | d limit |
| | | | ESR | ≤ 1.3% | o ii iilliai s | - P - C - C - C - C - C - C - C - C - C | |
| | | | ESR I _{leak} | | ıl specifi | • | |
| Vibration resistance test | To IEC 60068-2 | 2-6, test Fc: | | | | • | |
| Vibration resistance test | Frequency rang | ge 10 Hz 2 kHz | I _{leak} z, displa | ≤ initia | ıl specifi amplitu | ed limit | |
| Vibration resistance test | Frequency rang 1.5 mm, accele | ge 10 Hz 2 kHz eration max. 20 <i>g</i> , | I _{leak} z, displa duratio | ≤ initia | ıl specifi amplitu h. | de max | |
| Vibration resistance test | Frequency rang 1.5 mm, accele Capacitor mou | ge 10 Hz 2 kHz eration max. 20 <i>g</i> , nted by its wire le | I _{leak} z, displa duratio ads at a | ≤ initia cement n 3 × 2 a distand | ıl specifi amplitu h. | de max | |
| | Frequency rang 1.5 mm, accele Capacitor mounthe case and ac | ge 10 Hz 2 kHz eration max. 20 <i>g</i> , nted by its wire le dditionally clampe | I _{leak} z, displa duratio ads at a | ≤ initia cement n 3 × 2 a distand | ıl specifi amplitu h. | de max | |
| Vibration resistance test | Frequency rang 1.5 mm, accele Capacitor mounthe case and ac To IEC 60068- | ge 10 Hz 2 kHz eration max. 20 g, nted by its wire le dditionally clampe 1: | I _{leak} z, displa duratio eads at a ed by th | ≤ initia cement n 3 × 2 a distand e case. | amplitu h. | de max | |
| IEC climatic category | Frequency rang 1.5 mm, accele Capacitor mounthe case and ac To IEC 60068- | ge 10 Hz 2 kHz eration max. 20 g, nted by its wire le dditionally clampe 1: 5 °C/+125 °C/56 (| I _{leak} z, displa duratio eads at a ed by th | ≤ initia cement n 3 × 2 a distand e case. | amplitu h. | de max | |
| | Frequency rang 1.5 mm, accele Capacitor mounthe case and a To IEC 60068- 55/125/56 (-55 | ge 10 Hz 2 kHz eration max. 20 g, nted by its wire le dditionally clampe 1: 5 °C/+125 °C/56 (| I _{leak} z, displa duratio eads at a ed by th | ≤ initia cement n 3 × 2 a distand e case. | amplitu h. | de max | |

¹⁾ If optimum circuit design is used, the values are lower by 30%.






Low ESR - up to 140 °C

B41694, Axial-lead capacitors

Dimensional drawing

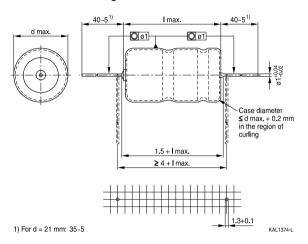

Dimensions, weights and packing units

| $d \times I$ | $d_{max} \times I_{max}$ | Approx. weight | Packing units | s (pcs.) |
|----------------|--------------------------|----------------|---------------|----------|
| mm | mm | g | Pallet | Reel |
| 12 × 30 | 12.5 × 30.5 | 5.1 | 288 | 450 |
| 14 × 25 | 14.5×25.5 | 5.7 | 200 | 350 |
| 14×30 | 14.5×30.5 | 6.8 | 200 | 350 |
| 16 × 30 | 16.5×30.5 | 8.9 | 180 | 250 |
| 16 × 39 | 16.5 × 40 | 11.7 | 180 | _ |
| 18 × 30 | 18.5×30.5 | 11.1 | 160 | _ |
| 18 × 39 | 18.5 × 40 | 14.7 | 160 | _ |
| 20 × 29 | 20.5×29.5 | 13.5 | 140 | _ |
| 21×39 | 21.5 × 40 | 20.0 | 140 | _ |
| 21 × 49 | 21.5 × 50 | 25.0 | 110 | _ |




Low ESR - up to 140 °C



B41794, Soldering star capacitors Dimensional drawings

Mounting holes d = 12 mm ... 14 mm

Mounting holes d = 16 mm ... 21 mm

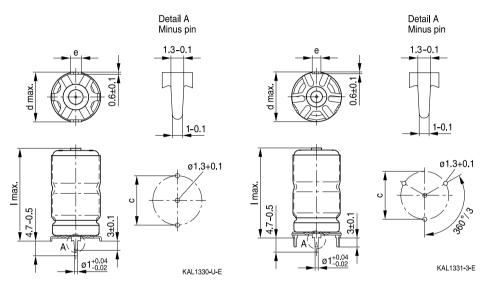

Dimensions, weights and packing units

| $\overline{d \times I}$ | $d_{max} \times I_{max}$ | c ±0.1 | e ±0.1 | Approx. weight | Packing units |
|-------------------------|--------------------------|--------|--------|----------------|---------------|
| mm | mm | mm | mm | g | pcs. |
| 12 × 30 | 13.5 × 32 | 12.5 | 3.0 | 5.4 | 480 |
| 14×25 | 15.5 × 27 | 14.5 | 3.0 | 6.1 | 480 |
| 14×30 | 15.5 × 32 | 14.5 | 3.0 | 7.2 | 480 |
| 16×30 | 17.5 × 32 | 16.5 | 3.0 | 9.4 | 300 |
| 16×39 | 17.5 × 41.5 | 16.5 | 3.0 | 12.2 | 200 |
| 18×30 | 19.5 × 32 | 18.5 | 3.0 | 11.8 | 300 |
| 18×39 | 19.5 × 41.5 | 18.5 | 3.0 | 15.4 | 200 |
| 21×39 | 22.5 × 41.5 | 21.5 | 3.5 | 21.0 | 324 |
| 21×49 | 22.5×51.5 | 21.5 | 3.5 | 26.0 | 264 |





Low ESR - up to 140 °C

Overview of available types

| V _R (V DC) | 25 | 40 | |
|-----------------------|----------------------------|---------|--|
| | Case dimensions d × I (mm) | | |
| C _R (μF) | | | |
| 330 | | 12 × 30 | |
| 470 | 14 × 25 | 14 × 30 | |
| 680 | | 16 × 30 | |
| 1000 | 16 × 30 | 18 × 30 | |
| 1200 | | 20 × 29 | |
| 1500 | 16 × 39 | 18 × 39 | |
| | 18 × 30 | | |
| 1800 | 20 × 29 | | |
| 2200 | 18 × 39 | 21 × 39 | |
| 2700 | | 21 × 49 | |
| 3300 | 21 × 39 | | |
| 3900 | 21 × 49 | | |



Low ESR – up to 140 °C



Case dimensions and ordering codes

| $\overline{V_R}$ | C _R | Case | Ordering code | Ordering code | Ordering code |
|------------------|----------------|------------|-----------------|-----------------|-----------------|
| • R | 100 Hz | dimensions | Axial pallet | Axial reel | Soldering star |
| | | | Axiai pallet | Axiai ieei | Soldering Star |
| | 20 °C | d×I | | | |
| V DC | μF | mm | | | |
| 25 | 470 | 14 × 25 | B41694A5477Q007 | B41694A5477Q009 | B41794A5477Q000 |
| | 1000 | 16 × 30 | B41694A5108Q007 | B41694A5108Q009 | B41794A5108Q000 |
| | 1500 | 16 × 39 | B41694A5158Q007 | | B41794A5158Q000 |
| | 1500 ∇ | 18 × 30 | B41694C5158Q007 | | B41794C5158Q000 |
| | 1800 | 20 × 29 | B41694A5188Q007 | | |
| | 2200 | 18 × 39 | B41694A5228Q007 | | B41794A5228Q000 |
| | 3300 | 21 × 39 | B41694A5338Q007 | | B41794A5338Q000 |
| | 3900 | 21 × 49 | B41694A5398Q007 | | B41794A5398Q000 |
| 40 | 330 | 12 × 30 | B41694A7337Q007 | B41694A7337Q009 | B41794A7337Q000 |
| | 470 | 14 × 30 | B41694B7477Q007 | B41694B7477Q009 | B41794B7477Q000 |
| | 680 | 16 × 30 | B41694A7687Q007 | B41694A7687Q009 | B41794A7687Q000 |
| | 1000 | 18 × 30 | B41694B7108Q007 | | B41794B7108Q000 |
| | 1200 | 20 × 29 | B41694A7128Q007 | | |
| | 1500 | 18 × 39 | B41694B7158Q007 | | B41794B7158Q000 |
| | 2200 | 21 × 39 | B41694A7228Q007 | | B41794A7228Q000 |
| | 2700 | 21 × 49 | B41694A7278Q007 | | B41794A7278Q000 |

 $[\]nabla$ Variant with different case dimensions





Low ESR - up to 140 °C


Technical data

| | | | | | _ | | | | | |
|----------------|-------------|--------------------|--------------------|--------------------|------------------|---------------------|---------------------|---------------------|-------------------|---------------------|
| C _R | ESR_{typ} | ESR _{max} | ESR _{max} | ESR _{max} | Z _{max} | I _{AC,max} | I _{AC,max} | I _{AC,max} | I _{AC,R} | I _{AC,max} |
| 100 Hz | 100 Hz | 100 Hz | 100 Hz | 10 kHz | 100 kHz | 10 kHz | 10 kHz | 10 kHz | 10 kHz | 10 kHz |
| 20 °C | 20 °C | 20 °C | -40 °C | 20 °C | 20 °C | 85 °C | 105 °C | 125 °C | 125 °C | 140 °C |
| μF | mΩ | mΩ | mΩ | mΩ | $m\Omega$ | Α | Α | Α | Α | Α |
| $V_{R} = 25$ | V DC | | | | | | | | | |
| 470 | 100 | 160 | 400 | 65 | 60 | 5.3 | 4.6 | 3.6 | 2.35 | 2.35 |
| 1000 | 50 | 80 | 200 | 38 | 35 | 7.3 | 6.3 | 4.9 | 3.2 | 3.2 |
| 1500 | 35 | 55 | 150 | 26 | 24 | 10.0 | 8.7 | 6.8 | 4.4 | 4.4 |
| 1500 ∇ | 32 | 51 | 150 | 22 | 20 | 10.7 | 9.3 | 7.3 | 4.7 | 4.7 |
| 1800 | 27 | 44 | 130 | 19 | 19 | 11.3 | 9.9 | 7.7 | 5.0 | 5.0 |
| 2200 | 22 | 35 | 110 | 15 | 14 | 14.6 | 12.7 | 9.9 | 6.4 | 6.4 |
| 3300 | 17 | 27 | 80 | 13 | 13 | 15.7 | 13.6 | 10.7 | 6.9 | 6.9 |
| 3900 | 14 | 22 | 60 | 10 | 10 | 19.8 | 17.2 | 13.5 | 8.7 | 8.7 |
| $V_{R} = 40$ | V DC | | | | | | | | | |
| 330 | 120 | 200 | 450 | 65 | 60 | 5.7 | 4.9 | 3.9 | 2.5 | 2.5 |
| 470 | 85 | 140 | 350 | 47 | 44 | 6.6 | 5.8 | 4.5 | 2.9 | 2.9 |
| 680 | 60 | 100 | 250 | 38 | 36 | 7.3 | 6.3 | 5.0 | 3.2 | 3.2 |
| 1000 | 40 | 65 | 180 | 23 | 22 | 10.6 | 9.2 | 7.2 | 4.6 | 4.6 |
| 1200 | 35 | 57 | 140 | 21 | 20 | 11.4 | 9.8 | 7.7 | 5.0 | 5.0 |
| 1500 | 27 | 45 | 120 | 16 | 15 | 14.5 | 12.6 | 9.9 | 6.3 | 6.3 |
| 2200 | 21 | 33 | 85 | 13 | 13 | 15.8 | 13.8 | 10.8 | 6.9 | 6.9 |
| 2700 | 17 | 27 | 65 | 11 | 11 | 19.9 | 17.3 | 13.5 | 8.7 | 8.7 |

 $[\]nabla$ Variant with different case dimensions











Useful life

depending on ambient temperature T_A under ripple current operating conditions at $V_R{}^{1)}$

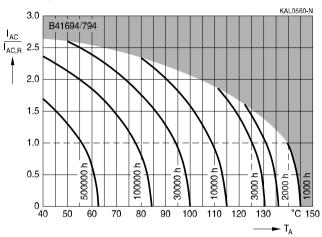

Useful life

depending on case temperature T_{C} under ripple current operating conditions at $V_{\text{R}}^{1)}$

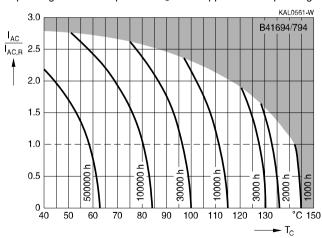


Refer to chapter "General technical information, 5.3 Calculation of useful life" for an explanation on how to interpret the useful life graphs.






Low ESR - up to 140 °C

Frequency factor of permissible ripple current I_{AC} versus frequency f

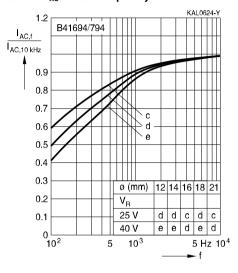


Frequency characteristics of ESR

Typical behavior

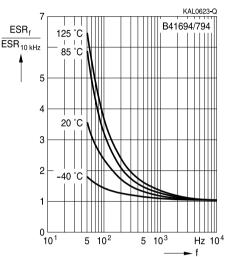


Equivalent series resistance ESR versus frequency f

Typical behavior for 1000 µF/40 V

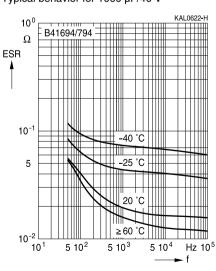

Impedance Z versus frequency f

Typical behavior for 1000 µF/40 V

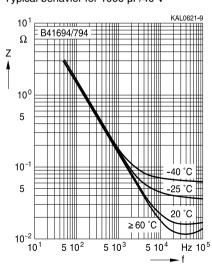



Low ESR - up to 140 °C



Cautions and warnings

Personal safety

The electrolytes used by EPCOS have not only been optimized with a view to the intended application, but also with regard to health and environmental compatibility. They do not contain any solvents that are detrimental to health, e.g. dimethyl formamide (DMF) or dimethyl acetamide (DMAC).

Furthermore, part of the high-voltage electrolytes used by EPCOS are self-extinguishing. They contain flame-retarding substances which will quickly extinguish any flame that may have been ignited.

As far as possible, EPCOS does not use any dangerous chemicals or compounds to produce operating electrolytes. However, in exceptional cases, such materials must be used in order to achieve specific physical and electrical properties because no safe substitute materials are currently known. However, the amount of dangerous materials used in our products has been limited to an absolute minimum. Nevertheless, the following rules should be observed when handling aluminum electrolytic capacitors:

- Any escaping electrolyte should not come into contact with eyes or skin.
- If electrolyte does come into contact with the skin, wash the affected parts immediately with running water. If the eyes are affected, rinse them for 10 minutes with plenty of water. If symptoms persist, seek medical treatment.
- Avoid breathing in electrolyte vapor or mists. Workplaces and other affected areas should be well ventilated. Clothing that has been contaminated by electrolyte must be changed and rinsed in water.





Low ESR - up to 140 °C

Product safety

The table below summarizes the safety instructions that must be observed without fail. A detailed description can be found in the relevant sections of chapter "General technical information".

| Polarity Make sure that polar capacitors are connected with the right polarity. Make sure that polar capacitors are connected with the right polarity. Polarity Make sure that polar capacitors are connected with the right polarity. Basic construction of aluminum electrolytic capacitors: Reverse voltage Voltages polarity classes should be prevented by connecting a diode. Upper category temperature. Do not exceed the upper category temperature. Make periodic inspections of the capacitors. Before the inspection, make sure that the power supply is turned off and carefully discharge the electricity of the capacitors. Do not apply any mechanical stress to the capacitor terminals. Mounting position of screw-terminal capacitors Mounting of single-ended capacitors might be damaged if excessive force is applied to the lead wires. Avoid any compressive, tensile or flexural stress. Do not move the capacitor after soldering to PC board. Do not pick up the PC board by the soldered capacitors. Do not insert the capacitor on the PC board with a hole space different to the lead space specified. The following maximum tightening torques must 11.3 | Topic | Safety information | Reference |
|--|-----------------------|--|-------------------------|
| Polarity Make sure that polar capacitors are connected with the right polarity. Make sure that polar capacitors are connected with the right polarity. Polarity Make sure that polar capacitors are connected with the right polarity. Polarity Make sure that polar capacitors are connected aluminum electrolytic capacitors. Reverse voltage Voltages polarity classes should be prevented by connecting a diode. Upper category temperature. Do not exceed the upper category temperature. Maintenance Make periodic inspections of the capacitors. Before the inspection, make sure that the power supply is turned off and carefully discharge the electricity of the capacitors. Do not apply any mechanical stress to the capacitor terminals. Mounting position of screw-terminals (safety vent) upside down. The internal structure of single-ended capacitors might be damaged if excessive force is applied to capacitors with screw terminals. Avoid any compressive, tensile or flexural stress. Do not move the capacitor after soldering to PC board. Do not pick up the PC board by the soldered capacitors. Do not insert the capacitor on the PC board with a hole space different to the lead space specified. Robustness of the following maximum tightening torques must not be exceeded when connecting screw terminals: M5: 2 Nm M6: 2.5 Nm Soldering Do not exceed the specified time or temperature 11.5 | Торіс | Salety information | |
| Polarity Make sure that polar capacitors are connected with the right polarity. Make sure that polar capacitors are connected with the right polarity. Peverse voltage Voltages polarity classes should be prevented by connecting a diode. Upper category temperature Do not exceed the upper category temperature. Make periodic inspections of the capacitors. Before the inspection, make sure that the power supply is turned off and carefully discharge the electricity of the capacitors. Do not apply any mechanical stress to the capacitor terminals. Mounting position of screw-terminal capacitors Mounting of single-ended capacitors Mounting of single-ended capacitors The internal structure of single-ended capacitors with screw terminals for the lead wires. Avoid any compressive, tensile or flexural stress. Do not move the capacitor after soldering to PC board. Do not pick up the PC board by the soldered capacitors. Do not insert the capacitor on the PC board with a hole space different to the lead space specified. Robustness of terminals: M5: 2 Nm M6: 2.5 Nm Mointing or temperature 11.1.1 "Basic construction of aluminum electrolytic capacitors" 7.2 "Maximum permissible operating temperature" 10 "Maintenance" 11.1. "Mounting positions of capacitors with screw terminals on single-ended capacitors with screw terminals and positions of respective of the soldered capacitors on the PC board with a hole space different to the lead space specified. Robustness of terminals: M5: 2 Nm M6: 2.5 Nm Do not exceed the specified time or temperature 11.5 | | | |
| with the right polarity. With the reverse voltage. With the right polarity. With the right polarity. With the right polarity. With the reverse voltage. With the reverse voltage. With the reverse voltage. With the reverse voltage. Waximum permissible operature. Waximum permissible operature. Waximum permissible operature. Waximum permissible operature. Waximum pertissite. Waximu | Dolority | Make ourse that polar conscitors are connected | |
| Reverse voltage Voltages polarity classes should be prevented by connecting a diode. Upper category temperature Do not exceed the upper category temperature. Maintenance Make periodic inspections of the capacitors. Before the inspection, make sure that the power supply is turned off and carefully discharge the electricity of the capacitors. Do not apply any mechanical stress to the capacitor terminals. Mounting position of screw-terminal capacitors Mounting of single-ended capacitors The internal structure of single-ended capacitors might be damaged if excessive force is applied to the lead wires. Avoid any compressive, tensile or flexural stress. Do not move the capacitor on the PC board with a hole space different to the lead space specified. The following maximum tightening torques must not be exceeded when connecting screw terminals: M5: 2 Nm M6: 2.5 Nm Soldering Do not exceed the upper category temperature 3.1.6 "Reverse voltage" 7.2 "Maximum permissible operating ** "Maintenance" "Maintenance" "Maintenance" "Maintenance" "Maintenance" "Mounting positions of capacitors with screw terminals "Mounting positions of capacitors with screw terminals* "Mounting positions of capacitors with screw terminals* 11.4 "Mounting considerations for single-ended capacitors" 11.4 "Mounting considerations for single-ended capacitors" 11.5 "Mounting torques" | Polanty | · · · · | - |
| Reverse voltage Voltages polarity classes should be prevented by connecting a diode. Upper category temperature Do not exceed the upper category temperature. Maintenance Make periodic inspections of the capacitors. Before the inspection, make sure that the power supply is turned off and carefully discharge the electricity of the capacitors. Do not apply any mechanical stress to the capacitor terminals. Mounting position of screw-terminal capacitors Mounting of single-ended capacitors The internal structure of single-ended capacitors might be damaged if excessive force is applied to the lead wires. Avoid any compressive, tensile or flexural stress. Do not move the capacitor after soldering to PC board. Do not pick up the PC board by the soldered capacitor. Do not insert the capacitor on the PC board with a hole space different to the lead space specified. Robustness of terminals: M5: 2 Nm M6: 2.5 Nm Soldering Do not exceed the specified time or temperature 11.5 | | with the right polarity. | |
| Reverse voltage Voltages polarity classes should be prevented by connecting a diode. Upper category temperature Do not exceed the upper category temperature. Maintenance Make periodic inspections of the capacitors. Before the inspection, make sure that the power supply is turned off and carefully discharge the electricity of the capacitors. Do not apply any mechanical stress to the capacitor terminals. Mounting position of screw-terminal capacitors Mounting of single-ended capacitors The internal structure of single-ended capacitors with be damaged if excessive force is applied to the lead wires. Avoid any compressive, tensile or flexural stress. Do not move the capacitor after soldering to PC board. Do not pick up the PC board by the soldered capacitor. Do not insert the capacitor on the PC board with a hole space different to the lead space specified. Robustness of terminals The following maximum tightening torques must not be exceeded when connecting screw terminals: M5: 2 Nm M6: 2.5 Nm Soldering Do not exceed the specified time or temperature 11.5 | | | , |
| Upper category temperature Do not exceed the upper category temperature. Maintenance Make periodic inspections of the capacitors. Before the inspection, make sure that the power supply is turned off and carefully discharge the electricity of the capacitors. Do not apply any mechanical stress to the capacitor terminals. Mounting position of screw-terminal capacitors Mounting of single-ended capacitors Mounting of single-ended capacitors Mounting of single-ended capacitors Avoid any compressive, tensile or flexural stress. Do not move the capacitor after soldering to PC board. Do not pick up the PC board by the soldered capacitor. Do not insert the capacitor on the PC board with a hole space different to the lead space specified. Robustness of terminals: Mounting of single-ended capacitors in the flexibility of the lead space specified. Robustness of terminals: MS: 2 Nm M6: 2.5 Nm Soldering Do not exceed the upper category temperature. 7.2 "Maximum permissible operating temperature. 10 "Maintenance" 11.4 "Mounting positions of capacitors with screw terminals 11.1. "Mounting considerations for single-ended capacitors" 11.4 "Mounting considerations for single-ended capacitors" 11.3 "Mounting torques" 11.3 "Mounting torques" | Povorco voltago | Voltages polarity aleeses should be provented by | · · |
| Upper category temperature Do not exceed the upper category temperature. Maintenance Make periodic inspections of the capacitors. Before the inspection, make sure that the power supply is turned off and carefully discharge the electricity of the capacitors. Do not apply any mechanical stress to the capacitor terminals. Mounting position of screw-terminal capacitors Mounting of single-ended capacitors Mounting considerations for single-ended capacitors Do not move the capacitor after soldering to PC board. Do not pick up the PC board by the soldered capacitor. Do not insert the capacitor on the PC board with a hole space different to the lead space specified. Robustness of terminals The following maximum tightening torques must not be exceeded when connecting screw terminals: Mounting considerations for single-ended capacitors 11.3 Mounting torques' Mounting torques' Mounting torques' Mounting torques' Mounting torques' | neverse voltage | | |
| temperature Maintenance Make periodic inspections of the capacitors. Before the inspection, make sure that the power supply is turned off and carefully discharge the electricity of the capacitors. Do not apply any mechanical stress to the capacitor terminals. Mounting position of screw-terminal capacitors Mounting of single-ended capacitors might be damaged if excessive force is applied to the lead wires. Avoid any compressive, tensile or flexural stress. Do not move the capacitor after soldering to PC board. Do not pick up the PC board by the soldered capacitor. Do not insert the capacitor on the PC board with a hole space different to the lead space specified. Robustness of terminals: Make periodic inspections of the capacitors. Before the inspection, make sure that the power supplied to gradients. 10 "Maintenance" 11.1. "Mounting positions of capacitors with screw terminals" 11.4 "Mounting considerations for single-ended capacitors provided to a capacitor on the PC board with a hole space different to the lead space specified. Robustness of terminals The following maximum tightening torques must not be exceeded when connecting screw terminals: M5: 2 Nm M6: 2.5 Nm Soldering Do not exceed the specified time or temperature 11.5 | Hanna and and an and | <u> </u> | |
| Maintenance Make periodic inspections of the capacitors. Before the inspection, make sure that the power supply is turned off and carefully discharge the electricity of the capacitors. Do not apply any mechanical stress to the capacitor terminals. Mounting position of screw-terminal capacitors Mounting of single-ended capacitors Mounting of single-ended capacitors The internal structure of single-ended capacitors might be damaged if excessive force is applied to the lead wires. Avoid any compressive, tensile or flexural stress. Do not move the capacitor after soldering to PC board. Do not pick up the PC board by the soldered capacitor. Do not insert the capacitor on the PC board with a hole space different to the lead space specified. Robustness of terminals Robustness of terminals Make periodic inspections of the capacitors. 10 "Maintenance" "Mounting positions of capacitors with screw terminals "Mounting positions of capacitors with screw terminals on the excessive force is applied to the lead wires. Avoid any compressive, tensile or flexural stress. Do not move the capacitor after soldering to PC board. Do not pick up the PC board by the soldered capacitor. Do not insert the capacitor on the PC board with a hole space different to the lead space specified. Robustness of terminals: M5: 2 Nm M6: 2.5 Nm Soldering Do not exceed the specified time or temperature 11.5 | | Do not exceed the upper category temperature. | · ·= |
| Make periodic inspections of the capacitors. Before the inspection, make sure that the power supply is turned off and carefully discharge the electricity of the capacitors. Do not apply any mechanical stress to the capacitor terminals. Mounting position of screw-terminal capacitors Mounting of single-ended capacitors Mounting considerations for single-ended capacitors' Do not move the capacitor after soldering to PC board. Do not pick up the PC board by the soldered capacitor. Do not insert the capacitor on the PC board with a hole space different to the lead space specified. Robustness of terminals: M5: 2 Nm M6: 2.5 Nm Soldering Make periodic inspections of the that the power sure tha | temperature | | • |
| Before the inspection, make sure that the power supply is turned off and carefully discharge the electricity of the capacitors. Do not apply any mechanical stress to the capacitor terminals. Mounting position of screw-terminal capacitors Mounting of single-ended might be damaged if excessive force is applied to capacitors Mounting of the lead wires. Avoid any compressive, tensile or flexural stress. Do not move the capacitor after soldering to PC board. Do not pick up the PC board by the soldered capacitor. Do not insert the capacitor on the PC board with a hole space different to the lead space specified. Robustness of terminals Robustness of terminals Robustness of terminals Mointing maximum tightening torques must not be exceeded when connecting screw terminals: M5: 2 Nm M6: 2.5 Nm Soldering Do not exceed the specified time or temperature 11.5 | | | |
| supply is turned off and carefully discharge the electricity of the capacitors. Do not apply any mechanical stress to the capacitor terminals. Mounting position of screwterminal capacitors Mounting of Single-ended capacitors Mounting of Single-ended capacitors Mounting of Single-ended capacitors Mounting of Single-ended capacitors and the lead wires. Avoid any compressive, tensile or flexural stress. Do not move the capacitor after soldering to PC board. Do not pick up the PC board by the soldered capacitor. Do not insert the capacitor on the PC board with a hole space different to the lead space specified. Robustness of terminals The following maximum tightening torques must not be exceeded when connecting screw terminals: M5: 2 Nm M6: 2.5 Nm Soldering Do not exceed the specified time or temperature 11.5 | Maintenance | | |
| electricity of the capacitors. Do not apply any mechanical stress to the capacitor terminals. Mounting position of screwterminal capacitors Mounting of single-ended capacitors Mounting of single-ended capacitors Mounting of single-ended capacitors might be damaged if excessive force is applied to the lead wires. Avoid any compressive, tensile or flexural stress. Do not move the capacitor after soldering to PC board. Do not pick up the PC board by the soldered capacitor. Do not insert the capacitor on the PC board with a hole space different to the lead space specified. Robustness of terminals The internal structure of single-ended capacitors might be damaged if excessive force is applied to the lead wires. Avoid any compressive, tensile or flexural stress. Do not move the capacitor after soldering to PC board. Do not pick up the PC board by the soldered capacitor. Do not insert the capacitor on the PC board with a hole space different to the lead space specified. Robustness of terminals The following maximum tightening torques must not be exceeded when connecting screw terminals: M5: 2 Nm M6: 2.5 Nm Soldering Do not exceed the specified time or temperature 11.5 | | · · · · · · · · · · · · · · · · · · · | "Maintenance" |
| Do not apply any mechanical stress to the capacitor terminals. Mounting position of screw-terminal capacitors Mounting of single-ended capacitors might be damaged if excessive force is applied to the lead wires. Avoid any compressive, tensile or flexural stress. Do not move the capacitor after soldering to PC board. Do not pick up the PC board by the soldered capacitor. Do not insert the capacitor on the PC board with a hole space different to the lead space specified. Robustness of terminals The internal structure of single-ended capacitors might be damaged if excessive force is applied to the lead wires. Avoid any compressive, tensile or flexural stress. Do not move the capacitor after soldering to PC board. Do not pick up the PC board by the soldered capacitor. Do not insert the capacitor on the PC board with a hole space different to the lead space specified. Robustness of terminals The following maximum tightening torques must not be exceeded when connecting screw terminals: M5: 2 Nm M6: 2.5 Nm Soldering Do not exceed the specified time or temperature 11.5 | | | |
| capacitor terminals. Mounting position of screw-terminal capacitors Mounting of single-ended capacitors Mounting of single-ended capacitors might be damaged if excessive force is applied to the lead wires. Avoid any compressive, tensile or flexural stress. Do not move the capacitor after soldering to PC board. Do not pick up the PC board by the soldered capacitor. Do not insert the capacitor on the PC board with a hole space different to the lead space specified. Robustness of terminals The internal structure of single-ended capacitors might be damaged if excessive force is applied to the lead wires. Avoid any compressive, tensile or flexural stress. Do not move the capacitor after soldering to PC board. Do not pick up the PC board by the soldered capacitor. Do not insert the capacitor on the PC board with a hole space different to the lead space specified. Robustness of terminals M5: 2 Nm M6: 2.5 Nm Soldering Do not exceed the specified time or temperature 11.5 | | | |
| Mounting position of screw-terminal capacitors with upside down. Mounting position of screw-terminal capacitors with upside down. "Mounting positions of capacitors with screw terminals" 11.4 "Mounting capacitors might be damaged if excessive force is applied to the lead wires. Avoid any compressive, tensile or flexural stress. Do not move the capacitor after soldering to PC board. Do not pick up the PC board by the soldered capacitor. Do not insert the capacitor on the PC board with a hole space different to the lead space specified. Robustness of terminals The following maximum tightening torques must not be exceeded when connecting screw terminals: M5: 2 Nm M6: 2.5 Nm Soldering Do not exceed the specified time or temperature 11.5 | | | |
| position of screw- terminal capacitors (safety vent) upside down. "Mounting positions of capacitors with screw terminals" Mounting of single-ended capacitors might be damaged if excessive force is applied to the lead wires. Avoid any compressive, tensile or flexural stress. Do not move the capacitor after soldering to PC board. Do not pick up the PC board by the soldered capacitor. Do not insert the capacitor on the PC board with a hole space different to the lead space specified. Robustness of terminals The following maximum tightening torques must not be exceeded when connecting screw terminals: M5: 2 Nm M6: 2.5 Nm Soldering Do not exceed the specified time or temperature 11.5 | Manustina | - | 44.4 |
| terminal capacitors Mounting of single-ended capacitors might be damaged if excessive force is applied to the lead wires. Avoid any compressive, tensile or flexural stress. Do not move the capacitor after soldering to PC board. Do not pick up the PC board by the soldered capacitor. Do not insert the capacitor on the PC board with a hole space different to the lead space specified. Robustness of terminals The following maximum tightening torques must not be exceeded when connecting screw terminals: M5: 2 Nm M6: 2.5 Nm Soldering Do not exceed the specified time or temperature 11.5 | - | | |
| Mounting of single-ended capacitors might be damaged if excessive force is applied to the lead wires. Avoid any compressive, tensile or flexural stress. Do not move the capacitor after soldering to PC board. Do not pick up the PC board by the soldered capacitor. Do not insert the capacitor on the PC board with a hole space different to the lead space specified. Robustness of terminals The following maximum tightening torques must not be exceeded when connecting screw terminals: M5: 2 Nm M6: 2.5 Nm Soldering Do not exceed the specified time or temperature 11.5 | | (salety verit) upside down. | |
| Mounting of single-ended capacitors might be damaged if excessive force is applied to the lead wires. Avoid any compressive, tensile or flexural stress. Do not move the capacitor after soldering to PC board. Do not pick up the PC board by the soldered capacitor. Do not insert the capacitor on the PC board with a hole space different to the lead space specified. Robustness of terminals The following maximum tightening torques must not be exceeded when connecting screw terminals: M5: 2 Nm M6: 2.5 Nm Soldering Do not exceed the specified time or temperature 11.5 | terriiriai capacitors | | |
| single-ended capacitors might be damaged if excessive force is applied to the lead wires. Avoid any compressive, tensile or flexural stress. Do not move the capacitor after soldering to PC board. Do not pick up the PC board by the soldered capacitor. Do not insert the capacitor on the PC board with a hole space different to the lead space specified. Robustness of terminals not be exceeded when connecting screw terminals: M5: 2 Nm M6: 2.5 Nm Soldering Do not exceed the specified time or temperature 11.5 | Mounting of | The internal structure of single-ended canacitors | |
| the lead wires. Avoid any compressive, tensile or flexural stress. Do not move the capacitor after soldering to PC board. Do not pick up the PC board by the soldered capacitor. Do not insert the capacitor on the PC board with a hole space different to the lead space specified. Robustness of terminals The following maximum tightening torques must not be exceeded when connecting screw terminals: M5: 2 Nm M6: 2.5 Nm Soldering Do not exceed the specified time or temperature 11.5 | • | | |
| Avoid any compressive, tensile or flexural stress. Do not move the capacitor after soldering to PC board. Do not pick up the PC board by the soldered capacitor. Do not insert the capacitor on the PC board with a hole space different to the lead space specified. Robustness of terminals The following maximum tightening torques must not be exceeded when connecting screw terminals: M5: 2 Nm M6: 2.5 Nm Soldering Do not exceed the specified time or temperature 11.5 | • | | 9 |
| Do not move the capacitor after soldering to PC board. Do not pick up the PC board by the soldered capacitor. Do not insert the capacitor on the PC board with a hole space different to the lead space specified. Robustness of terminals not be exceeded when connecting screw terminals: M5: 2 Nm M6: 2.5 Nm Soldering Do not exceed the specified time or temperature 11.5 | σαρασιτοίο | | |
| board. Do not pick up the PC board by the soldered capacitor. Do not insert the capacitor on the PC board with a hole space different to the lead space specified. Robustness of terminals The following maximum tightening torques must not be exceeded when connecting screw terminals: M5: 2 Nm M6: 2.5 Nm Soldering Do not exceed the specified time or temperature 11.5 | | | omgro oridod odpaditoro |
| capacitor. Do not insert the capacitor on the PC board with a hole space different to the lead space specified. Robustness of terminals The following maximum tightening torques must not be exceeded when connecting screw terminals: M5: 2 Nm M6: 2.5 Nm Soldering Do not exceed the specified time or temperature 11.5 | | | |
| capacitor. Do not insert the capacitor on the PC board with a hole space different to the lead space specified. Robustness of terminals The following maximum tightening torques must not be exceeded when connecting screw terminals: M5: 2 Nm M6: 2.5 Nm Soldering Do not exceed the specified time or temperature 11.5 | | Do not pick up the PC board by the soldered | |
| hole space different to the lead space specified. Robustness of terminals The following maximum tightening torques must not be exceeded when connecting screw terminals: M5: 2 Nm M6: 2.5 Nm Soldering Do not exceed the specified time or temperature 11.5 | | | |
| Robustness of terminals The following maximum tightening torques must not be exceeded when connecting screw terminals: M5: 2 Nm M6: 2.5 Nm Soldering Do not exceed the specified time or temperature 11.3 "Mounting torques" "Mounting torques" 11.3 "Mounting torques" | | Do not insert the capacitor on the PC board with a | |
| terminals not be exceeded when connecting screw terminals: M5: 2 Nm M6: 2.5 Nm Soldering Do not exceed the specified time or temperature 11.5 | | hole space different to the lead space specified. | |
| terminals: M5: 2 Nm M6: 2.5 Nm Soldering Do not exceed the specified time or temperature 11.5 | Robustness of | The following maximum tightening torques must | 11.3 |
| M5: 2 Nm M6: 2.5 Nm Soldering Do not exceed the specified time or temperature 11.5 | terminals | not be exceeded when connecting screw | "Mounting torques" |
| M6: 2.5 Nm Soldering Do not exceed the specified time or temperature 11.5 | | terminals: | |
| Soldering Do not exceed the specified time or temperature 11.5 | | M5: 2 Nm | |
| | | | |
| limits during soldering. "Soldering" | Soldering | Do not exceed the specified time or temperature | ' ' ' ' |
| | | limits during soldering. | "Soldering" |





Low ESR – up to 140 °C

| Topic | Safety information | Reference chapter "General technical information" |
|--|---|---|
| Soldering, cleaning agents | Do not allow halogenated hydrocarbons to come into contact with aluminum electrolytic capacitors. | 11.6 "Cleaning agents" |
| Passive flammability | Avoid external energy, such as fire or electricity. | 8.1 "Passive flammability" |
| Active flammability | Avoid overload of the capacitors. | 8.2 "Active flammability" |
| | | Reference chapter "Capacitors with screw terminals" |
| Breakdown strength of insulating sleeves | Do not damage the insulating sleeve, especially when ring clips are used for mounting. | "Screw terminals – accessories" |





Low ESR – up to 140 °C

Symbols and terms

| Symbol | English | German |
|-----------------------|---|---|
| С | Capacitance | Kapazität |
| C_R | Rated capacitance | Nennkapazität |
| Cs | Series capacitance | Serienkapazität |
| $C_{S,T}$ | Series capacitance at temperature T | Serienkapazität bei Temperatur T |
| C_{f} | Capacitance at frequency f | Kapazität bei Frequenz f |
| d | Case diameter, nominal dimension | Gehäusedurchmesser, Nennmaß |
| d_{max} | Maximum case diameter | Maximaler Gehäusedurchmesser |
| ESL | Self-inductance | Eigeninduktivität |
| ESR | Equivalent series resistance | Ersatzserienwiderstand |
| ESR _f | Equivalent series resistance at frequency f | Ersatzserienwiderstand bei Frequenz f |
| ESR _T | Equivalent series resistance at temperature T | Ersatzserienwiderstand bei Temperatur T |
| f | Frequency | Frequenz |
| 1 | Current | Strom |
| I_{AC} | Alternating current (ripple current) | Wechselstrom |
| $I_{AC,rms}$ | Root-mean-square value of alternating current | Wechselstrom, Effektivwert |
| $I_{AC,f}$ | Ripple current at frequency f | Wechselstrom bei Frequenz f |
| $I_{AC,max}$ | Maximum permissible ripple current | Maximal zulässiger Wechselstrom |
| $I_{AC,R}$ | Rated ripple current | Nennwechselstrom |
| I _{AC,R} (B) | Rated ripple current for base cooling | Nennwechselstromstrom für Bodenkühlung |
| l _{leak} | Leakage current | Reststrom |
| $I_{leak,op}$ | Operating leakage current | Betriebsreststrom |
| 1 | Case length, nominal dimension | Gehäuselänge, Nennmaß |
| I _{max} | Maximum case length (without terminals and mounting stud) | Maximale Gehäuselänge (ohne Anschlüsse und Gewindebolzen) |
| R | Resistance | Widerstand |
| R _{ins} | Insulation resistance | Isolationswiderstand |
| R_{symm} | Balancing resistance | Symmetrierwiderstand |
| T | Temperature | Temperatur |
| ΔT | Temperature difference | Temperaturdifferenz |
| T_A | Ambient temperature | Umgebungstemperatur |
| T _C | Case temperature | Gehäusetemperatur |
| T_B | Capacitor base temperature | Temperatur des Becherbodens |
| t | Time | Zeit |
| Δt | Period | Zeitraum |
| t _b | Service life (operating hours) | Brauchbarkeitsdauer (Betriebszeit) |



Low ESR - up to 140 °C



| Symbol | English | German |
|----------------|---|--------------------------------------|
| V | Voltage | Spannung |
| V_{F} | Forming voltage | Formierspannung |
| V_{op} | Operating voltage | Betriebsspannung |
| V_{R} | Rated voltage, DC voltage | Nennspannung, Gleichspannung |
| V_s | Surge voltage | Spitzenspannung |
| X_{C} | Capacitive reactance | Kapazitiver Blindwiderstand |
| X_L | Inductive reactance | Induktiver Blindwiderstand |
| Z | Impedance | Scheinwiderstand |
| Z_T | Impedance at temperature T | Scheinwiderstand bei Temperatur T |
| $tan \ \delta$ | Dissipation factor | Verlustfaktor |
| λ | Failure rate | Ausfallrate |
| ϵ_{0} | Absolute permittivity | Elektrische Feldkonstante |
| ϵ_{r} | Relative permittivity | Dielektrizitätszahl |
| ω | Angular velocity; $2 \cdot \pi \cdot f$ | Kreisfrequenz; $2 \cdot \pi \cdot f$ |

Note

All dimensions are given in mm.



Important notes

The following applies to all products named in this publication:

- 1. Some parts of this publication contain statements about the suitability of our products for certain areas of application. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
- 2. We also point out that in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or lifesaving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
- 3. The warnings, cautions and product-specific notes must be observed.
- 4. In order to satisfy certain technical requirements, some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous). Useful information on this will be found in our Material Data Sheets on the Internet (www.epcos.com/material). Should you have any more detailed questions, please contact our sales offices.
- 5. We constantly strive to improve our products. Consequently, the products described in this publication may change from time to time. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also reserve the right to discontinue production and delivery of products. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
- Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI).
- 7. The trade names EPCOS, BAOKE, Alu-X, CeraDiode, CSMP, CSSP, CTVS, DeltaCap, DigiSiMic, DSSP, FormFit, MiniBlue, MiniCell, MKK, MKD, MLSC, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, SIP5D, SIP5K, ThermoFuse, WindCap are trademarks registered or pending in Europe and in other countries. Further information will be found on the Internet at www.epcos.com/trademarks.