T-1 3/4 (5mm) SOLID STATE LAMP

Part Number: WP7113ZGCK Green

ATTENTION OBSERVE PRECAUTIONS FOR HANDLING ELECTROSTATIC DISCHARGE SENSITIVE DEVICES

Features

- Low power consumption.
- Popular T-1 3/4 diameter package.
- General purpose leads.
- Reliable and rugged.
- Long life solid state reliability.
- Available on tape and reel.
- RoHS compliant.

Description


The Green source color devices are made with InGaN on Sapphire Light Emitting Diode.

Static electricity and surge damage the LEDS.

It is recommended to use a wrist band or anti-electrostatic glove when handling the LEDs.

All devices, equipment and machinery must be electrically grounded.

Package Dimensions

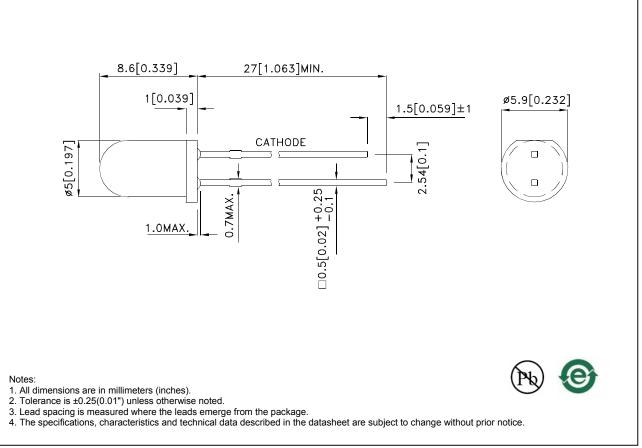

SPEC NO: DSAM6349 APPROVED: WYNEC REV NO: V.2B CHECKED: Allen Liu DATE: MAR/26/2013 DRAWN: F.Cui PAGE: 1 OF 6 ERP: 1101032129

Salaatian Cuida

Part No.	Part No. Dice Lens Type	Lens Type	lv (mcd) [2] @ 20mA		Viewing Angle [1]
			Min.	Тур.	201/2
WP7113ZGCK	Green (InGaN)	Water Clear	7000	12000	20°

Notes:

1. θ 1/2 is the angle from optical centerline where the luminous intensity is 1/2 of the optical peak value.

Luminous intensity/ luminous Flux: +/-15%.
Luminous intensity value is traceable to the CIE127-2007 compliant national standards.

Electrical / Optical Characteristics at TA=25°C

Symbol	Parameter	Device	Тур.	Max.	Units	Test Conditions
λpeak	Peak Wavelength	Green	515		nm	IF=20mA
λD [1]	Dominant Wavelength	Green	525		nm	IF=20mA
Δλ1/2	Spectral Line Half-width	Green	35		nm	IF=20mA
С	Capacitance	Green	45		pF	VF=0V;f=1MHz
VF [2]	Forward Voltage	Green	3.3	4.1	V	I⊧=20mA
lr	Reverse Current	Green		50	uA	VR = 5V

Notes:

Wavelength: +/-1nm.
Forward Voltage: +/-0.1V.
Wavelength value is traceable to the CIE127-2007 compliant national standards.


Absolute Maximum Ratings at TA=25°C


Green	Units	
102.5	mW	
25	mA	
150	mA	
5	V	
-40°C To +85°C		
260°C For 3 Seconds		
260°C For 5 Seconds		
	102.5 25 150 5 -40°C To +85°C 260°C For 3 Seconds	

Notes:

1. 1/10 Duty Cycle, 0.1ms Pulse Width.


2. 2mm below package base.
3. 5mm below package base.

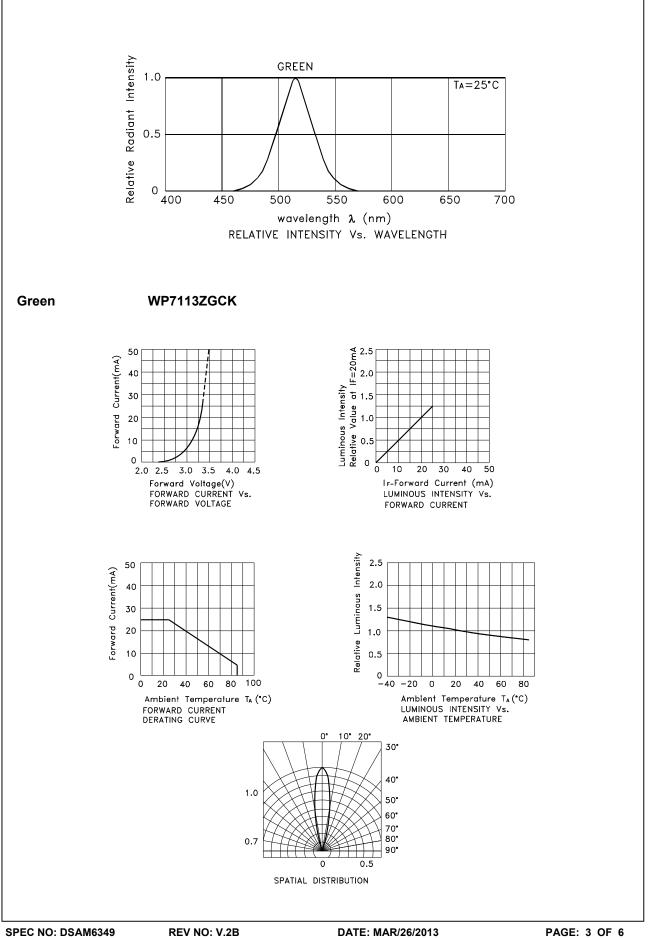

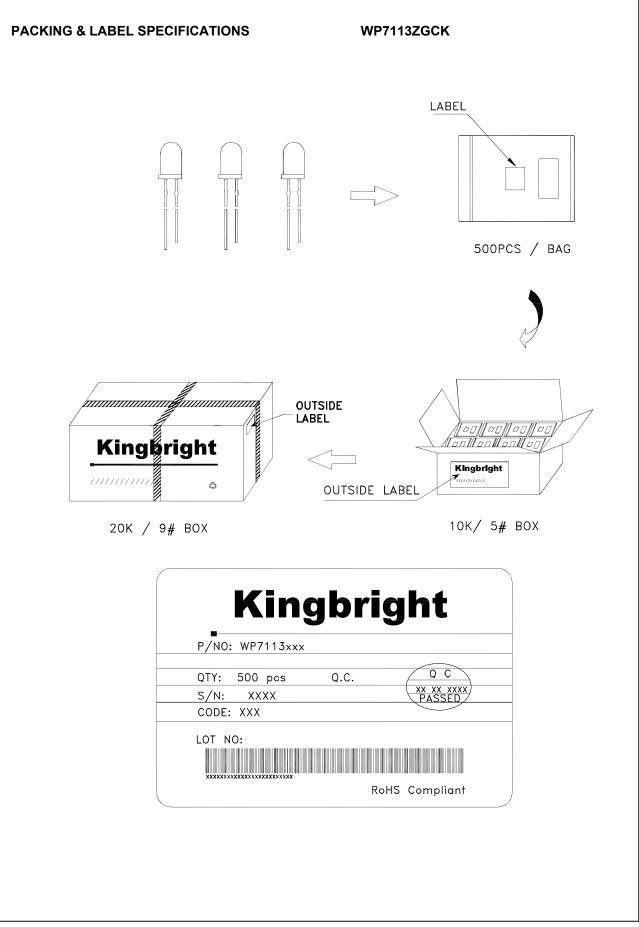


PRECAUTIONS

1. The lead pitch of the LED must match the pitch of the mounting holes on the PCB during component placement. Lead-forming may be required to insure the lead pitch matches the hole pitch. Refer to the figure below for proper lead forming procedures. (Fig. 1)

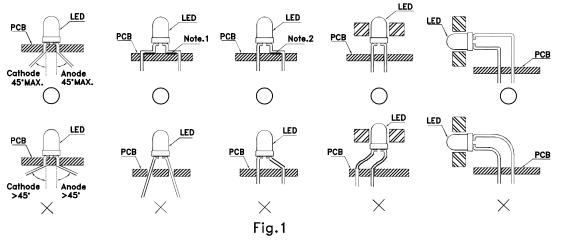


" \bigcirc " Correct mounting method "imes" Incorrect mounting method

- 2. When soldering wire to the LED, use individual heat-shrink tubing to insulate the exposed leads to prevent accidental contact short-circuit. (Fig.2)
- 3. Use stand-offs (Fig.3) or spacers (Fig.4) to securely position the LED above the PCB.

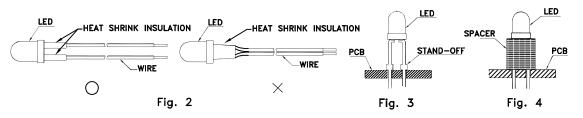

- 4. Maintain a minimum of 2mm clearance between the base of the LED lens and the first lead bend. (Fig. 5 and 6)
- 5. During lead forming, use tools or jigs to hold the leads securely so that the bending force will not be transmitted to the LED lens and its internal structures. Do not perform lead forming once the component has been mounted onto the PCB. (Fig. 7)

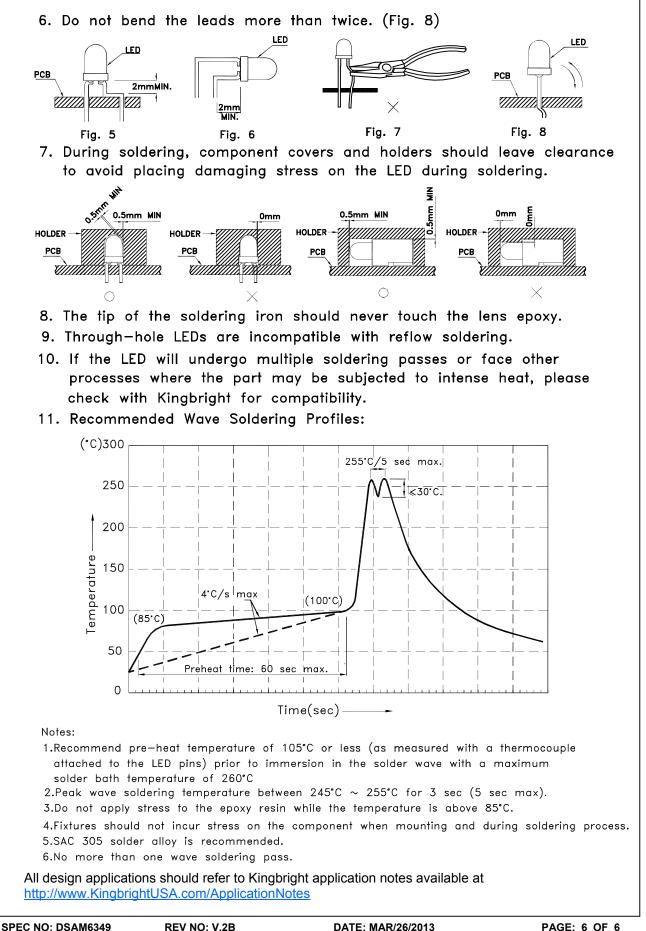

REV NO: V.2B CHECKED: Allen Liu DATE: MAR/26/2013 DRAWN: F.Cui