

Liquid Detection in Paper Bags!

- 10 Times Higher Incident Level Than Our Company Rating
- IP67 Waterproof
- Shock Resistant Die-cast Case





Be sure to read *Safety Precautions* on page 3.

Ordering Information


Sensors

 Infrared light

Sensing method	Appearance	Sensing distance		Model
Through-beam			200 mm	E3S-5E4S-45 2M

Accessories (Order Separately)

Mounting Brackets

Appearance	Model	Quantity	Remarks
	E39-L6	1	Provided with the Sensor.

Note: Two of the accessories must be prepared for the beam-through type. One of them is for an emitter and the other is for a receiver.


Ratings and Specifications

Sensing method		Through-beam
Item	Model	E3S-5E4S-45
Sensing distance		Through-beam for paper bags: 200 mm (For standard through-beam use: 10 m)
Standard object		Liquid or solid object, Opaque of 11-mm dia. min.
Directional angle		Emitter/Receiver: 10 to 30° each
Light source (wavelength)		Red LED (890 nm)
Power supply voltage		12 to 24 VDC±10%, ripple (p-p): 10% max.
Current consumption		45 mA max. (Emitter: 25 mA max., Receiver: 20 mA max.)
Control output		Load power supply voltage: 24 VDC max., Load current: 80 mA max. (residual voltage: 1 V max.) NPN voltage output configuration Light-ON/Dark-ON mode selector
Self-diagnosis output		Load power supply voltage: 24 VDC max., Load current: 50 mA max. (residual voltage: 1 V max.) Voltage output type
External-diagnosis input		Emission OFF: Short-circuit to 0 V or 1.5 V max. (Outflow current 1 mA max.), Emission ON: Disconnected (Leakage current 0.1 mA max.)
Protective circuits		Power supply reverse polarity protection, Output short-circuit protection
Response time		Operate or reset: 10 ms max.
Sensitivity adjustment		One-turn adjuster
Ambient illumination (Receiver side)		Incandescent lamp: 3,000 lx max., Sunlight 10,000 lx max.
Ambient temperature range		Operating: -10 to 55°C (with no icing and condensation), Storage: 0 to 65°C (with no icing and condensation)
Ambient humidity range		Operating: 35% to 85%, Storage: 35% to 95% (with no condensation)
Insulation resistance		20 MΩ min. at 500 VDC
Dielectric strength		1,000 VAC, 50/60 Hz for 1 min
Vibration resistance		Destruction: 10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y and Z directions
Shock resistance		Destruction: 500 m/s ² 3 times each in X, Y and Z directions
Degree of protection		IEC 60529 IP67
Connection method		Pre-wired Models (Standard cable length: 2 m)
Weight (packed state)		Approx. 300 g
Material	Case	Zinc die-cast
	Lens	Polycarbonate (PC)
	Mounting Brackets	Iron
Accessories		Mounting Bracket (with screws), Screw driver for adjustment, Sensitivity adjuster, Instruction manual

Engineering Data (Typical)


Parallel Operating Range

Through-beam

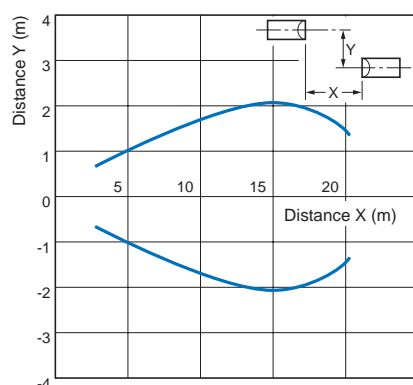





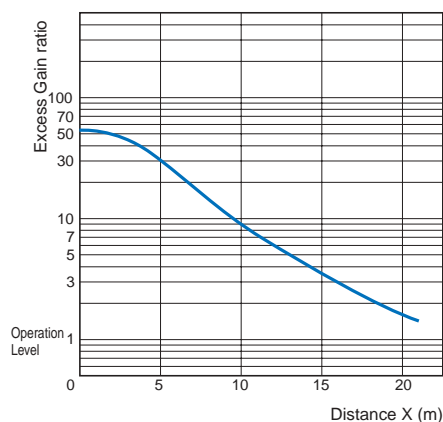





















Excess Gain vs. Set Distance

Through-beam



I/O Circuit Diagrams

NPN output

Model	Operation mode	Timing charts	Operation selector	Output circuit
E3S-5E4S-45	Light-ON	Incident light  No incident light  Light indicator (red) ON  OFF  Output transistor ON  OFF  Load 1 (relay) Operate  Reset (Between brown and black leads)  Load 2 H  L (Between blue and black leads) 	L side (LIGHT ON)	Through-beam Receivers
	Dark-ON	Incident light  No incident light  Light indicator (red) ON  OFF  Output transistor ON  OFF  Load 1 (relay) Operate  Reset (Between brown and black leads)  Load 2 H  L (Between blue and black leads) 	D side (DARK ON)	
	---	External -diagnosis input ON  OFF (Between blue and pink leads)  Semiconductor laser diode for emission ON  OFF  Indicator ON  OFF 	---	Through-beam Emitters

* Voltage output (when connecting a transistor circuit, etc.)

Safety Precautions

Refer to *Warranty and Limitations of Liability*.

WARNING

This product is not designed or rated for ensuring safety of persons either directly or indirectly. Do not use it for such purposes.



Precautions for Correct Use

Do not use the product in atmospheres or environments that exceed product ratings.

- The paper bag sensors are used to detect whether paper bags contain contents inside. Note, however, that the sensors are not available for some types of paper bags.

Inside paper bag	Type of paper bag	Remarks
Detectable	Light colored paper bags	Empty paper bags allow beam-through while paper bags containing liquid or solid objects do not. Detection uses this difference.
Not detectable	Dark colored paper bags, Paper bags having inner coating of aluminum foil	Paper bags prevent beam-through. Detection cannot be made.

Note: Make sure in which of the types your paper bag is categorized before use.

- About the lens The inside of the emitter lens looks cloudy. This is due to the characteristics of the lens and not abnormal. Use it as it is.


Dimensions

(Unit: mm)


Tolerance class IT16 applies to dimensions in this datasheet unless otherwise specified.

Sensors

E3S-5E4S-45



Emitter: E3S-5LE4S-45
Receiver: E3S-5DE4S-45

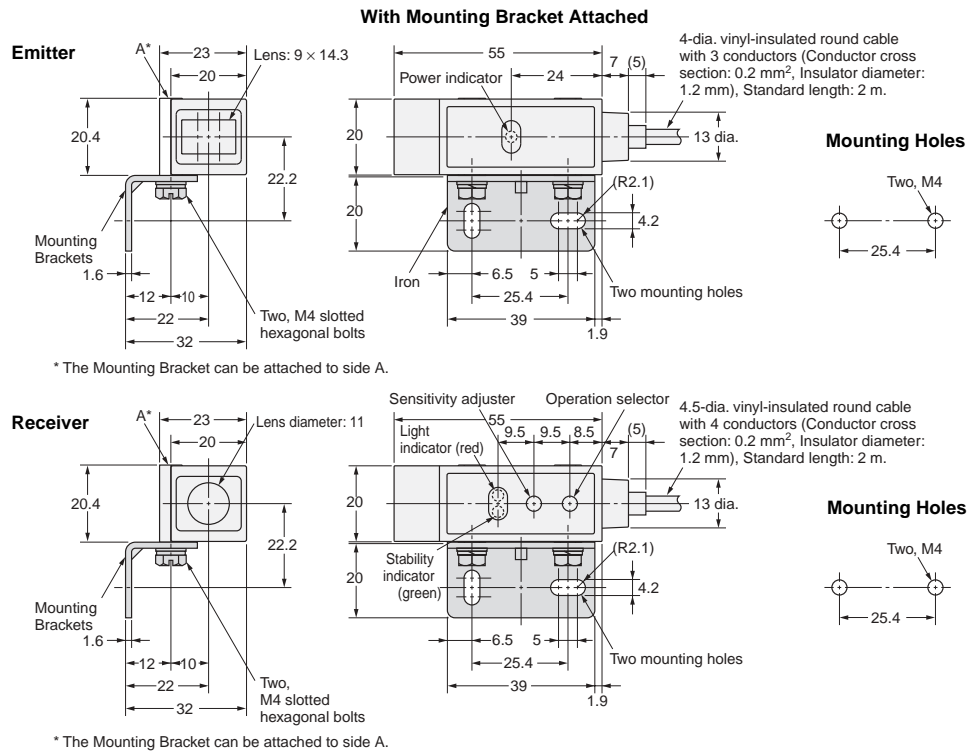

Accessories (Order Separately)

Mounting Brackets

Refer to E39-L/F39-L/E39-S/E39-R for details.

Read and Understand This Catalog

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

Warranty and Limitations of Liability

WARRANTY

OMRON's exclusive warranty is that the products are free from defects in materials and workmanship for a period of one year (or other period if specified) from date of sale by OMRON.

OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, REGARDING NON-INFRINGEMENT, MERCHANTABILITY, OR FITNESS FOR PARTICULAR PURPOSE OF THE PRODUCTS. ANY BUYER OR USER ACKNOWLEDGES THAT THE BUYER OR USER ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. OMRON DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED.

LIMITATIONS OF LIABILITY

OMRON SHALL NOT BE RESPONSIBLE FOR SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED ON CONTRACT, WARRANTY, NEGLIGENCE, OR STRICT LIABILITY.

In no event shall the responsibility of OMRON for any act exceed the individual price of the product on which liability is asserted.

IN NO EVENT SHALL OMRON BE RESPONSIBLE FOR WARRANTY, REPAIR, OR OTHER CLAIMS REGARDING THE PRODUCTS UNLESS OMRON'S ANALYSIS CONFIRMS THAT THE PRODUCTS WERE PROPERLY HANDLED, STORED, INSTALLED, AND MAINTAINED AND NOT SUBJECT TO CONTAMINATION, ABUSE, MISUSE, OR INAPPROPRIATE MODIFICATION OR REPAIR.

Application Considerations

SUITABILITY FOR USE

OMRON shall not be responsible for conformity with any standards, codes, or regulations that apply to the combination of products in the customer's application or use of the products.

At the customer's request, OMRON will provide applicable third party certification documents identifying ratings and limitations of use that apply to the products. This information by itself is not sufficient for a complete determination of the suitability of the products in combination with the end product, machine, system, or other application or use.

The following are some examples of applications for which particular attention must be given. This is not intended to be an exhaustive list of all possible uses of the products, nor is it intended to imply that the uses listed may be suitable for the products:

- Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this catalog.
- Nuclear energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations.
- Systems, machines, and equipment that could present a risk to life or property.

Please know and observe all prohibitions of use applicable to the products.

NEVER USE THE PRODUCTS FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCTS ARE PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

PROGRAMMABLE PRODUCTS

OMRON shall not be responsible for the user's programming of a programmable product, or any consequence thereof.

Disclaimers

CHANGE IN SPECIFICATIONS

Product specifications and accessories may be changed at any time based on improvements and other reasons.

It is our practice to change model numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the products may be changed without any notice. When in doubt, special model numbers may be assigned to fix or establish key specifications for your application on your request. Please consult with your OMRON representative at any time to confirm actual specifications of purchased products.

DIMENSIONS AND WEIGHTS

Dimensions and weights are nominal and are not to be used for manufacturing purposes, even when tolerances are shown.

PERFORMANCE DATA

Performance data given in this catalog is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of OMRON's test conditions, and the users must correlate it to actual application requirements. Actual performance is subject to the OMRON Warranty and Limitations of Liability.

ERRORS AND OMISSIONS

The information in this document has been carefully checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical, or proofreading errors, or omissions.