

SPECIFICATION

SPEC. No. A-SoftC-a

D A T E : 2013 Sep.

To

Non-Controlled Copy

CUSTOMER'S PRODUCT NAME

TDK PRODUCT NAME

MULTILAYER CERAMIC CHIP CAPACITORS

CGA Series / Automotive Grade

Soft Termination

Please return this specification to TDK representatives.

If orders are placed without returned specification, please allow us to judge that specification is accepted by your side.

RECEIPT CONFIRMATION

DATE: YEAR MONTH DAY

TDK Corporation
Sales
Electronic Components
Sales & Marketing Group

TDK-EPC Corporation
Engineering
Ceramic Capacitors Business Group

APPROVED	Person in charge

APPROVED	CHECKED	Person in charge

1. SCOPE

This specification is applicable to chip type multilayer ceramic capacitors with a priority over the other relevant specifications.

Production places defined in this specification shall be TDK-EPC Corporation Japan, TDK(Suzhou)Co.,Ltd and TDK Components U.S.A. Inc.

EXPLANATORY NOTE:

This specification warrants the quality of the ceramic chip capacitors. The chips should be evaluated or confirmed a state of mounted on your product.

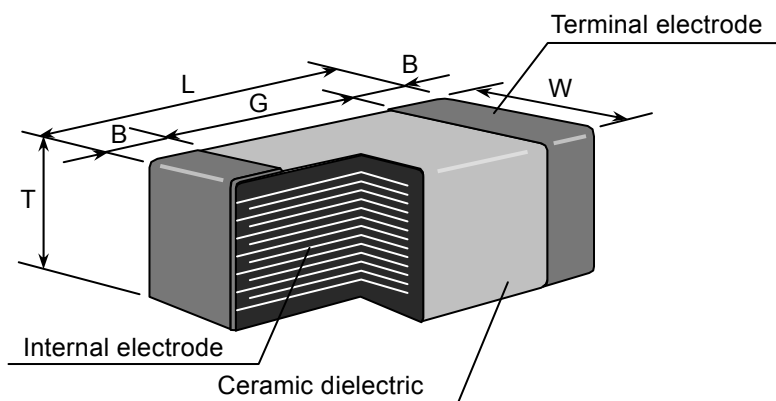
If the use of the chips goes beyond the bounds of the specification, we can not afford to guarantee.

2. CODE CONSTRUCTION

(Example)

Catalog Number :	<u>CGA4</u>	<u>J</u>	<u>3</u>	<u>X7R</u>	<u>1C</u>	<u>475</u>	<u>M</u>	<u>125</u>	<u>A</u>	<u>E</u>
(Web)	(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)	(10)
Item Description :	<u>CGA4</u>	<u>J</u>	<u>3</u>	<u>X7R</u>	<u>1C</u>	<u>475</u>	<u>M</u>	<u>T</u>	<u>○○○S</u>	
	(1)	(2)	(3)	(4)	(5)	(6)	(7)	(11)	(12)	

(1) Type



Please refer to product list for the dimension of each product.

(2) Thickness

*As for dimension tolerance, please contact with our sales representative.

Thickness	Dimension(mm)
F	0.85
H	1.15
J	1.25
K	1.30
L	1.60
M	2.00
N	2.30
P	2.50

(3) Voltage condition in the life test
(Max. operating Temp./1000h)

Sign	Condition
1	Rated Voltage x 1
2	Rated Voltage x 2
3	Rated Voltage x 1.5
4	Rated Voltage x 1.2

(4) Temperature Characteristics (Details are shown in table 1 No.6 at page 6)

(5) Rated Voltage

Symbol	Rated Voltage
2 J	DC 630 V
2 W	DC 450 V
2 E	DC 250 V
2 A	DC 100 V
1 H	DC 50 V
1 V	DC 35 V
1 E	DC 25 V
1 C	DC 16 V

(6) Rated Capacitance

Stated in three digits and in units of pico farads (pF).

The first and Second digits identify the first and second significant figures of the capacitance, the third digit identifies the multiplier.

R is designated for a decimal point.

Example 475 → 4,700,000pF (4.7uF)

(7) Capacitance tolerance

* M tolerance shall be TDK standard for over 10uF.

Symbol	Tolerance
K	± 10 %
M	± 20 %

(8) Thickness code (Only Catalog Number)


(9) Package code (Only Catalog Number)

(10) Special code (Only Catalog Number)

(11) Packaging

Symbol	Packaging
B	Bulk
T	Taping

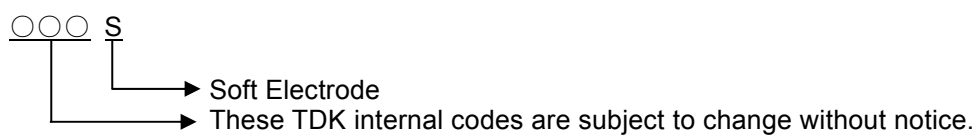(12) TDK Internal code



3. RATED CAPACITANCE AND CAPACITANCE TOLERANCE

3.1 Standard combination of rated capacitance and tolerances

Temperature Characteristics	Capacitance tolerance	Rated capacitance
X7R X7S X7T	K ($\pm 10\%$) M ($\pm 20\%$)	E – 3 series

* The standard capacitance tolerance is M ($\pm 20\%$).

3.2 Capacitance Step in E series

E series	Capacitance Step		
E- 3	1.0	2.2	4.7

4. OPERATING TEMPERATURE RANGE

T.C.	Min. operating Temperature	Max. operating Temperature	Reference Temperature
X7R X7S X7T	-55°C	125°C	25°C

5. STORING CONDITION AND TERM

5 to 40°C at 20 to 70%RH
6 months Max.

6. P.C. BOARD

When mounting on an aluminum substrate, large case sizes such as CGA6, CGA8 and CGA9 types are more likely to be affected by heat stress from the substrate. Please inquire separate specification for the large case sizes when mounted on the substrate.

7. INDUSTRIAL WASTE DISPOSAL




Dispose this product as industrial waste in accordance with the Industrial Waste Law.

8. PERFORMANCE

table 1

No.	Item	Performance	Test or inspection method															
1	External Appearance	No defects which may affect performance.	Inspect with magnifying glass (3×).															
2	Insulation Resistance	10,000MΩ or 500MΩ·μF min. (As for the capacitors of rated voltage 16V DC, 10,000 MΩ or 100MΩ·μF min.,) whichever smaller.	Apply rated voltage for 60s. As for the rated voltage 630V DC, apply 500V DC.															
3	Voltage Proof	Withstand test voltage without insulation breakdown or other damage.	<table><tr><td>Rated voltage</td><td>Apply voltage</td></tr><tr><td>100V and under</td><td>2.5 × rated voltage</td></tr><tr><td>Over 100V</td><td>1.5 × rated voltage</td></tr></table> <p>Above DC voltage shall be applied for 1 to 5s. Charge / discharge current shall not exceed 50mA.</p>	Rated voltage	Apply voltage	100V and under	2.5 × rated voltage	Over 100V	1.5 × rated voltage									
Rated voltage	Apply voltage																	
100V and under	2.5 × rated voltage																	
Over 100V	1.5 × rated voltage																	
4	Capacitance	Within the specified tolerance.	<table><tr><td>Rated Capacitance</td><td>Measuring frequency</td><td>Measuring voltage</td></tr><tr><td>10uF and under</td><td>1kHz±10%</td><td>1.0±0.2Vrms.</td></tr></table>	Rated Capacitance	Measuring frequency	Measuring voltage	10uF and under	1kHz±10%	1.0±0.2Vrms.									
Rated Capacitance	Measuring frequency	Measuring voltage																
10uF and under	1kHz±10%	1.0±0.2Vrms.																
5	Dissipation Factor	<table><tr><td>T.C.</td><td>D.F.</td></tr><tr><td>X7R</td><td>0.03 max. 0.05 max. 0.075 max.</td></tr><tr><td>X7S</td><td>0.05 max.</td></tr><tr><td>X7T</td><td>0.025 max.</td></tr></table>	T.C.	D.F.	X7R	0.03 max. 0.05 max. 0.075 max.	X7S	0.05 max.	X7T	0.025 max.	<p>See No.4 in this table for measuring condition.</p> <p>For information which product has which Dissipation Factor, please contact with our sales representative.</p>							
T.C.	D.F.																	
X7R	0.03 max. 0.05 max. 0.075 max.																	
X7S	0.05 max.																	
X7T	0.025 max.																	
6	Temperature Characteristics of Capacitance	<table><tr><td>Capacitance Change (%)</td></tr><tr><td>No voltage applied</td></tr><tr><td>X7R : ±15</td></tr><tr><td>X7S : ±22</td></tr><tr><td>X7T : +22 -33</td></tr></table>	Capacitance Change (%)	No voltage applied	X7R : ±15	X7S : ±22	X7T : +22 -33	<p>Capacitance shall be measured by the steps shown in the following table after thermal equilibrium is obtained for each step.</p> <p>ΔC be calculated ref. STEP3 reading</p> <table><tr><td>Step</td><td>Temperature(°C)</td></tr><tr><td>1</td><td>Reference temp. ± 2</td></tr><tr><td>2</td><td>Min. operating temp. ± 2</td></tr><tr><td>3</td><td>Reference temp. ± 2</td></tr><tr><td>4</td><td>Max. operating temp. ± 2</td></tr></table>	Step	Temperature(°C)	1	Reference temp. ± 2	2	Min. operating temp. ± 2	3	Reference temp. ± 2	4	Max. operating temp. ± 2
Capacitance Change (%)																		
No voltage applied																		
X7R : ±15																		
X7S : ±22																		
X7T : +22 -33																		
Step	Temperature(°C)																	
1	Reference temp. ± 2																	
2	Min. operating temp. ± 2																	
3	Reference temp. ± 2																	
4	Max. operating temp. ± 2																	

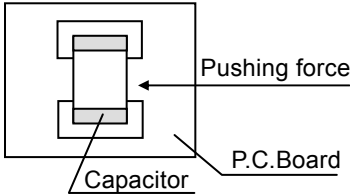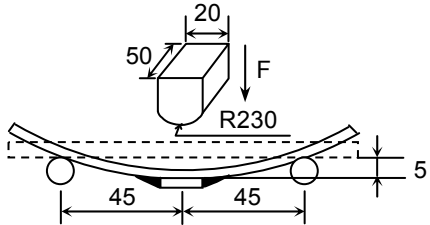(continued)

No.	Item	Performance	Test or inspection method
7	Robustness of Terminations	No sign of termination coming off, breakage of ceramic, or other abnormal signs.	<p>Reflow solder the capacitors on a P.C.Board shown in Appendix 1a or Appendix 1b and apply a pushing force of 17.7N with 10 ± 1s.</p> 
8	Bending	No mechanical damage.	<p>Reflow solder the capacitors on a P.C.Board shown in Appendix 2 and bend it for 5mm. (2mm is applied for CGA8 and CGA9.)</p>  <p>(Unit : mm)</p>
9	Solderability	<p>New solder to cover over 75% of termination. 25% may have pin holes or rough spots but not concentrated in one spot. Ceramic surface of A sections shall not be exposed due to melting or shifting of termination material.</p> 	<p>Completely soak both terminations in solder at $235\pm 5^{\circ}\text{C}$ for 2 ± 0.5s.</p> <p>Solder : H63A (JIS Z 3282)</p> <p>Flux: Isopropyl alcohol (JIS K 8839) Rosin (JIS K 5902) 25% solid solution.</p>

(continued)

No.	Item		Performance		Test or inspection method
10	Resistance to solder heat	External appearance	No cracks are allowed and terminations shall be covered at least 60% with new solder.		Completely soak both terminations in solder at 260±5°C for 5±1s.
		Capacitance	Characteristics	Change from the value before test	Preheating condition Temp. : 150±10°C Time : 1 to 2min. Flux : Isopropyl alcohol (JIS K 8839) Rosin (JIS K 5902) 25% solid solution. Solder : H63A (JIS Z 3282) Leave the capacitors in ambient condition for 24±2h before measurement.
			X7R X7S X7T	± 7.5 %	
		D.F.	Meet the initial spec.		
		Insulation Resistance	Meet the initial spec.		
Voltage proof	No insulation breakdown or other damage.				
11	Vibration	External appearance	No mechanical damage.		Reflow solder the capacitors on a P.C.Board shown in Appendix 1a or Appendix 1b before testing.
		Capacitance	Characteristics	Change from the value before test	Vibrate the capacitor with following conditions. Applied force : 5G max. Frequency : 10-2000Hz Duration : 20 min. Cycle : 12 cycles in each 3 mutually perpendicular directions.
			X7R X7S X7T	± 7.5 %	
		D.F.	Meet the initial spec.		

(continued)

No.	Item		Performance		Test or inspection method																	
12	Temperature cycle	External appearance	No mechanical damage.		Reflow solder the capacitors on a P.C.Board shown in Appendix 1a or Appendix 1b before testing.																	
		Capacitance						Expose the capacitors in the condition step1 through step 4 and repeat 1,000 times consecutively.														
			Characteristics	Change from the value before test																		
			X7R X7S X7T	± 7.5 % ± 12.5 %																		
		D.F.	Meet the initial spec.		Leave the capacitors in ambient condition for 24±2h before measurement. <table><tr><td>Step</td><td>Temperature(°C)</td><td>Time (min.)</td></tr><tr><td>1</td><td>Min. operating temp. ± 3</td><td>30 ± 3</td></tr><tr><td>2</td><td>Reference Temp.</td><td>2 - 5</td></tr><tr><td>3</td><td>Max. operating temp. ± 2</td><td>30 ± 2</td></tr><tr><td>4</td><td>Reference Temp.</td><td>2 - 5</td></tr></table>						Step	Temperature(°C)	Time (min.)	1	Min. operating temp. ± 3	30 ± 3	2	Reference Temp.	2 - 5	3	Max. operating temp. ± 2	30 ± 2
		Step	Temperature(°C)	Time (min.)																		
		1	Min. operating temp. ± 3	30 ± 3																		
		2	Reference Temp.	2 - 5																		
		3	Max. operating temp. ± 2	30 ± 2																		
		4	Reference Temp.	2 - 5																		
		Insulation Resistance	Meet the initial spec.																			
Voltage proof	No insulation breakdown or other damage.																					
13	Moisture Resistance (Steady State)	External appearance	No mechanical damage.		Reflow solder the capacitors on a P.C.Board shown in Appendix 1a or Appendix 1b before testing.																	
		Capacitance						Leave at temperature 40±2°C, 90 to 95%RH for 500 +24,0h.														
			Characteristics	Change from the value before test																		
			X7R X7S X7T	± 12.5 % ± 25 %																		
		D.F.	Characteristics 200% of initial spec. max		Leave the capacitors in ambient condition for 24±2h before measurement.																	
Insulation Resistance	1,000MΩ or 50MΩ·μF min. (As for the capacitors of rated voltage 16V DC, 1,000 MΩ or 10MΩ·μF min.,) whichever smaller.																					

(continued)


No.	Item		Performance		Test or inspection method					
14	Moisture Resistance	External appearance	No mechanical damage.		Reflow solder the capacitors on a P.C.Board shown in Appendix 1a or Appendix 1b before testing.					
		Capacitance	Characteristics	Change from the value before test	Apply the rated voltage at temperature 85°C and 85%RH for 1,000 +48,0h. Charge/discharge current shall not exceed 50mA. Leave the capacitors in ambient condition for 6 to 24h (Class1) or 24±2h (Class2) before measurement. Voltage conditioning (only for class2) Voltage treat the capacitor under testing temperature and voltage for 1hour. Leave the capacitors in ambient condition for 24±2h before measurement. Use this measurement for initial value.					
			X7R X7S X7T	± 12.5 % ± 25 %						
			D.F.	Characteristics 200% of initial spec. max						
Insulation Resistance	500MΩ or 25MΩ·μF min. (As for the capacitors of rated voltage 16V DC, 500 MΩ or 5MΩ·μF min.,) whichever smaller.									
15	Life	External appearance	No mechanical damage.		Reflow solder the capacitors on a P.C.Board shown in Appendix 1a or Appendix 1b before testing.					
		Capacitance	Characteristics	Change from the value before test	Below the voltage shall be applied at 125±2°C for 1,000 +48, 0h. <table><tr><td>Applied voltage</td></tr><tr><td>Rated voltage x2</td></tr><tr><td>Rated voltage x1.5</td></tr><tr><td>Rated voltage x1.2</td></tr><tr><td>Rated voltage x1</td></tr></table>	Applied voltage	Rated voltage x2	Rated voltage x1.5	Rated voltage x1.2	Rated voltage x1
			Applied voltage							
			Rated voltage x2							
		Rated voltage x1.5								
Rated voltage x1.2										
Rated voltage x1										
X7R X7S X7T	± 15 % ± 25 %									
D.F.	Characteristics 200% of initial spec. max									
Insulation Resistance	1,000MΩ or 50MΩ·μF min. (As for the capacitors of rated voltage 16V DC, 1,000 MΩ or 10MΩ·μF min.,) whichever smaller.		For information which product has which applied voltage, please contact with our sales representative. Charge/discharge current shall not exceed 50mA. Leave the capacitors in ambient condition for 6 to 24h (Class1) or 24±2h (Class2) before measurement. Voltage conditioning (only for class2) Voltage treat the capacitor under testing temperature and voltage for 1hour. Leave the capacitors in ambient condition for 24±2h before measurement. Use this measurement for initial value.							

*As for the initial measurement of capacitors on number 6,10,11,12 and 13, leave capacitors at 150 –10,0°C for 1 hour and measure the value after leaving capacitors for 24±2h in ambient condition.

Appendix - 1a

P.C. Board for reliability test

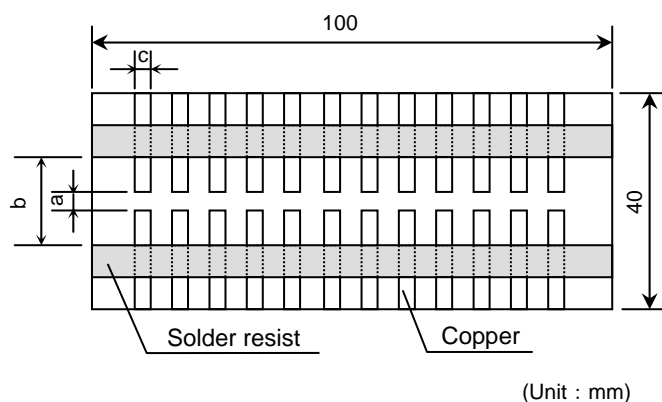
Applied for CGA4, CGA5



Appendix - 1b

P.C. Board for reliability test

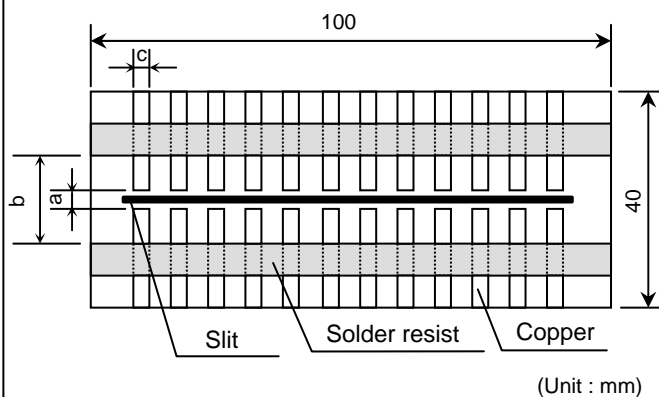
Applied for CGA6, CGA8, CGA9



Appendix - 2



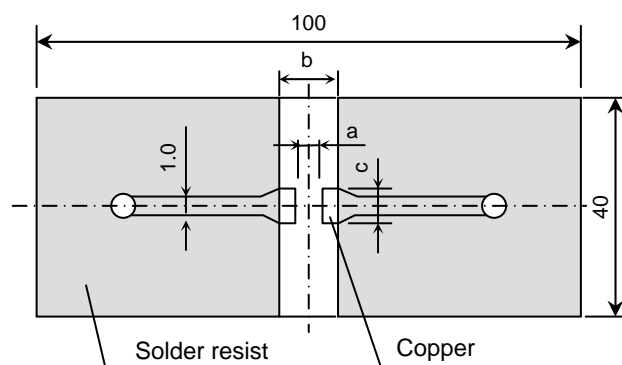P.C. Board for bending test

Applied for CGA4, CGA5, CGA6, CGA8, CGA9




Material : Glass Epoxy (As per JIS C6484 GE4)

P.C. Board thickness : Appendix-1a, 1b, 2 1.6mm

-  Copper (thickness 0.035mm)
-  Solder resist

TDK (EIA style)	Dimensions (mm)		
	a	b	c
CGA4 (CC0805)	1.2	4.0	1.65
CGA5 (CC1206)	2.2	5.0	2.0
CGA6 (CC1210)	2.2	5.0	2.9
CGA8 (CC1812)	3.5	7.0	3.7
CGA9 (CC2220)	4.5	8.0	5.6

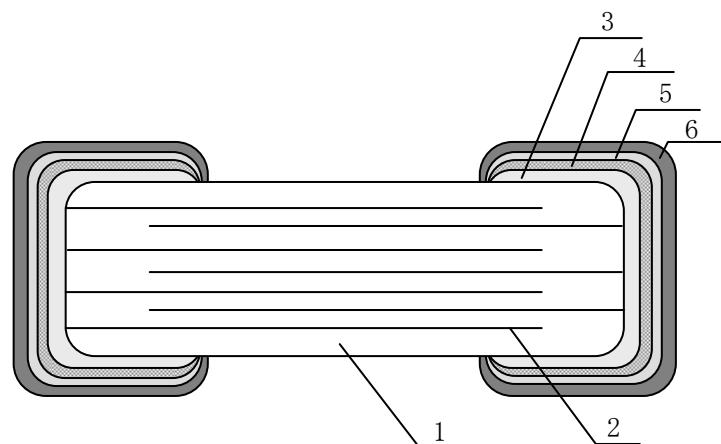9. INSIDE STRUCTURE AND MATERIAL



No.	NAME	MATERIAL
1	Dielectric	BaTiO ₃
2	Electrode	Nickel (Ni)
3	Termination	Copper (Cu)
4		Conductive resin (Filler : Ag)
5		Nickel (Ni)
6		Tin (Sn)
















10. RECOMMENDATION

As for CGA6, CGA8 and CGA9 types, It is recommended to provide a slit (about 1mm wide) in the board under the components to improve washing Flux. And please make sure to dry detergent up completely before.






11. SOLDERING CONDITION




















As for CGA6, CGA8 and CGA9 types, reflow soldering only.














12. Caution

No.	Process	Condition														
1	Operating Condition (Storage, Transportation)	<div>1-1. Storage</div> <div>1) The capacitors must be stored in an ambient temperature of 5 to 40°C with a relative humidity of 20 to 70%RH. The products should be used within 6 months upon receipt.</div> <div>2) The capacitors must be operated and stored in an environment free of dew condensation and these gases such as Hydrogen Sulphide, Hydrogen Sulphate, Chlorine, Ammonia and sulfur.</div> <div>3) Avoid storing in sun light and falling of dew.</div> <div>4) Do not use capacitors under high humidity and high and low atmospheric pressure which may affect capacitors reliability.</div> <div>5) Capacitors should be tested for the solderability when they are stored for long time.</div> <div>1-2. Handling in transportation</div> <div>In case of the transportation of the capacitors, the performance of the capacitors may be deteriorated depending on the transportation condition. (Refer to JEITA RCR-2335B 9.2 Handling in transportation)</div>														
2	Circuit design ⚠ Caution	<div>2-1. Operating temperature</div> <div>Operating temperature should be followed strictly within this specification, especially be careful with maximum temperature.</div> <div>1) Do not use capacitors above the maximum allowable operating temperature.</div> <div>2) Surface temperature including self heating should be below maximum operating temperature. (Due to dielectric loss, capacitors will heat itself when AC is applied. Especially at high frequencies around its SRF, the heat might be so extreme that it may damage itself or the product mounted on. Please design the circuit so that the maximum temperature of the capacitors including the self heating to be below the maximum allowable operating temperature. Temperature rise at capacitor surface shall be below 20°C)</div> <div>3) The electrical characteristics of the capacitors will vary depending on the temperature. The capacitors should be selected and designed in taking the temperature into consideration.</div> <div>2-2. Operating voltage</div> <div>1) Operating voltage across the terminals should be below the rated voltage. When AC and DC are super imposed, V_{0-P} must be below the rated voltage. AC or pulse with overshooting, V_{P-P} must be below the rated voltage. When the voltage is started to apply to the circuit or it is stopped applying, the irregular voltage may be generated for a transit period because of resonance or switching. Be sure to use the capacitors within rated voltage containing these Irregular voltage.</div> <table><tr><th>Voltage</th><th>(1) DC voltage</th><th>(2) DC+AC voltage</th><th>(3) AC voltage</th></tr><tr><td>Positional Measurement (Rated voltage)</td><td></td><td></td><td></td></tr></table> <table><tr><th>Voltage</th><th>(4) Pulse voltage (A)</th><th>(5) Pulse voltage (B)</th></tr><tr><td>Positional Measurement (Rated voltage)</td><td></td><td></td></tr></table>	Voltage	(1) DC voltage	(2) DC+AC voltage	(3) AC voltage	Positional Measurement (Rated voltage)				Voltage	(4) Pulse voltage (A)	(5) Pulse voltage (B)	Positional Measurement (Rated voltage)		
Voltage	(1) DC voltage	(2) DC+AC voltage	(3) AC voltage													
Positional Measurement (Rated voltage)																
Voltage	(4) Pulse voltage (A)	(5) Pulse voltage (B)														
Positional Measurement (Rated voltage)																




No.	Process	Condition																																								
2	Circuit design ⚠ Caution	<p>2) Even below the rated voltage, if repetitive high frequency AC or pulse is applied, the reliability of the capacitors may be reduced.</p> <p>3) The effective capacitance will vary depending on applied DC and AC voltages. The capacitors should be selected and designed in taking the voltages into consideration.</p> <p>2-3. Frequency When the capacitors (Class 2) are used in AC and/or pulse voltages, the capacitors may vibrate themselves and generate audible sound.</p>																																								
3	Designing P.C.board	<p>The amount of solder at the terminations has a direct effect on the reliability of the capacitors.</p> <p>1) The greater the amount of solder, the higher the stress on the chip capacitors, and the more likely that it will break. When designing a P.C.board, determine the shape and size of the solder lands to have proper amount of solder on the terminations.</p> <p>2) Avoid using common solder land for multiple terminations and provide individual solder land for each terminations.</p> <p>3) Size and recommended land dimensions.</p> <div><p>Chip capacitors Solder land Solder resist</p><p style="text-align: center;">Flow soldering (mm)</p><table><tr><th>Type Symbol</th><th>CGA4 (CC0805)</th><th>CGA5 (CC1206)</th></tr><tr><td>A</td><td>1.0 - 1.3</td><td>2.1 - 2.5</td></tr><tr><td>B</td><td>1.0 - 1.2</td><td>1.1 - 1.3</td></tr><tr><td>C</td><td>0.8 - 1.1</td><td>1.0 - 1.3</td></tr></table><p style="text-align: center;">Reflow soldering (mm)</p><table><tr><th>Type Symbol</th><th>CGA4 (CC0805)</th><th>CGA5 (CC1206)</th></tr><tr><td>A</td><td>0.9 - 1.2</td><td>2.0 - 2.4</td></tr><tr><td>B</td><td>0.7 - 0.9</td><td>1.0 - 1.2</td></tr><tr><td>C</td><td>0.9 - 1.2</td><td>1.1 - 1.6</td></tr></table><table><tr><th>Type Symbol</th><th>CGA6 (CC1210)</th><th>CGA8 (CC1812)</th><th>CGA9 (CC2220)</th></tr><tr><td>A</td><td>2.0 - 2.4</td><td>3.1 - 3.7</td><td>4.1 - 4.8</td></tr><tr><td>B</td><td>1.0 - 1.2</td><td>1.2 - 1.4</td><td>1.2 - 1.4</td></tr><tr><td>C</td><td>1.9 - 2.5</td><td>2.4 - 3.2</td><td>4.0 - 5.0</td></tr></table></div>	Type Symbol	CGA4 (CC0805)	CGA5 (CC1206)	A	1.0 - 1.3	2.1 - 2.5	B	1.0 - 1.2	1.1 - 1.3	C	0.8 - 1.1	1.0 - 1.3	Type Symbol	CGA4 (CC0805)	CGA5 (CC1206)	A	0.9 - 1.2	2.0 - 2.4	B	0.7 - 0.9	1.0 - 1.2	C	0.9 - 1.2	1.1 - 1.6	Type Symbol	CGA6 (CC1210)	CGA8 (CC1812)	CGA9 (CC2220)	A	2.0 - 2.4	3.1 - 3.7	4.1 - 4.8	B	1.0 - 1.2	1.2 - 1.4	1.2 - 1.4	C	1.9 - 2.5	2.4 - 3.2	4.0 - 5.0
Type Symbol	CGA4 (CC0805)	CGA5 (CC1206)																																								
A	1.0 - 1.3	2.1 - 2.5																																								
B	1.0 - 1.2	1.1 - 1.3																																								
C	0.8 - 1.1	1.0 - 1.3																																								
Type Symbol	CGA4 (CC0805)	CGA5 (CC1206)																																								
A	0.9 - 1.2	2.0 - 2.4																																								
B	0.7 - 0.9	1.0 - 1.2																																								
C	0.9 - 1.2	1.1 - 1.6																																								
Type Symbol	CGA6 (CC1210)	CGA8 (CC1812)	CGA9 (CC2220)																																							
A	2.0 - 2.4	3.1 - 3.7	4.1 - 4.8																																							
B	1.0 - 1.2	1.2 - 1.4	1.2 - 1.4																																							
C	1.9 - 2.5	2.4 - 3.2	4.0 - 5.0																																							

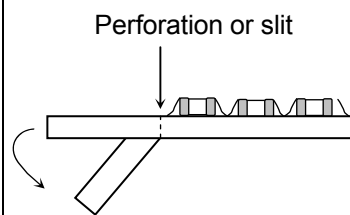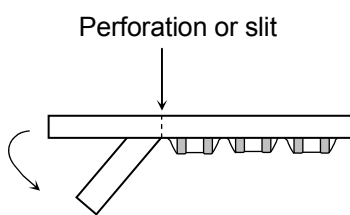No.	Process	Condition		
3	Designing P.C.board	4) Recommended chip capacitors layout is as following.		
			Disadvantage against bending stress	Advantage against bending stress
		Mounting face	<p>Perforation or slit</p> 	<p>Perforation or slit</p> 
			Break P.C.board with mounted side up.	Break P.C.board with mounted side down.
		Chip arrangement (Direction)	<p>Mount perpendicularly to perforation or slit</p> <p>Perforation or slit</p> 	<p>Mount in parallel with perforation or slit</p> <p>Perforation or slit</p> 
			Distance from slit	<p>Closer to slit is higher stress</p>  <p>$(l_1 < l_2)$</p>

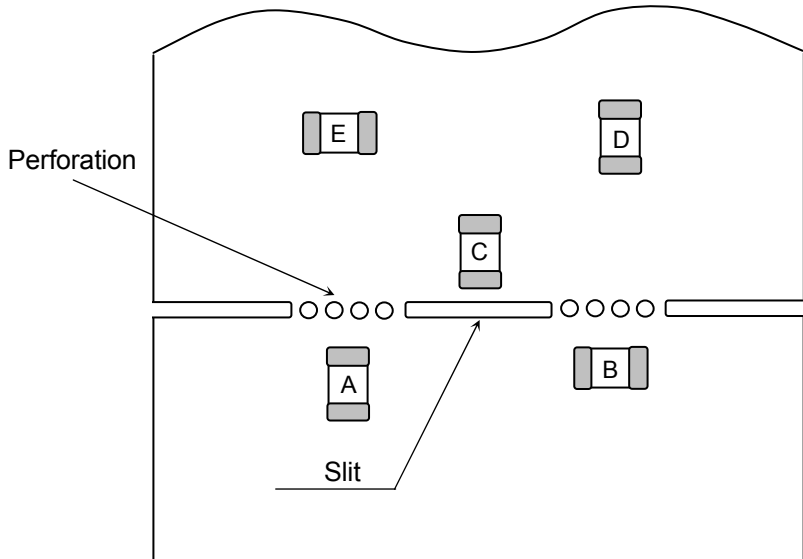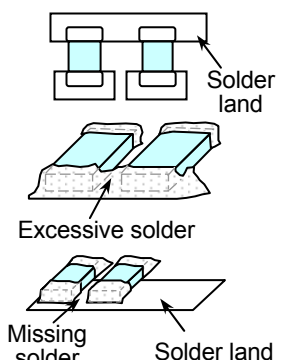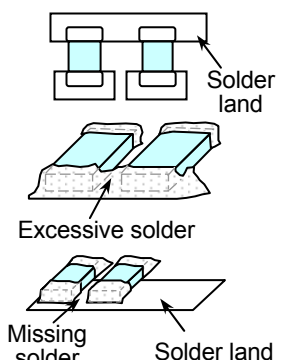





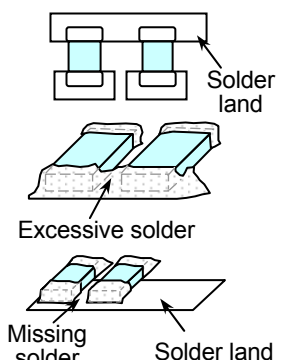



No.	Process	Condition												
3	Designing P.C.board	<div>5) Mechanical stress varies according to location of chip capacitors on the P.C.board.</div> <div></div> <div>The stress in capacitors is in the following order. $A > B = C > D > E$</div> <div>6) Layout recommendation</div> <table><tr><th>Example</th><th>Use of common solder land</th><th>Soldering with chassis</th><th>Use of common solder land with other SMD</th></tr><tr><td>Need to avoid</td><td></td><td></td><td></td></tr><tr><td>Recommendation</td><td></td><td></td><td></td></tr></table>	Example	Use of common solder land	Soldering with chassis	Use of common solder land with other SMD	Need to avoid				Recommendation			
Example	Use of common solder land	Soldering with chassis	Use of common solder land with other SMD											
Need to avoid														
Recommendation														

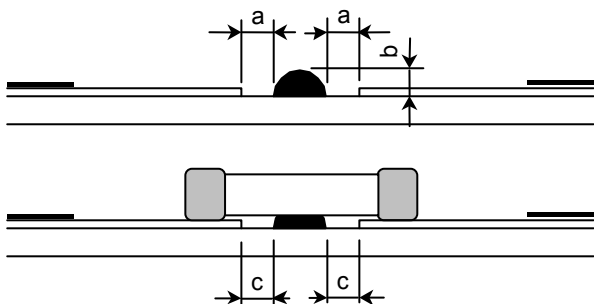No.	Process	Condition															
4	Mounting	<div>4-1. Stress from mounting head</div> <div>If the mounting head is adjusted too low, it may induce excessive stress in the chip capacitors to result in cracking. Please take following precautions.</div> <div>1) Adjust the bottom dead center of the mounting head to reach on the P.C.board surface and not press it.</div> <div>2) Adjust the mounting head pressure to be 1 to 3N of static weight.</div> <div>3) To minimize the impact energy from mounting head, it is important to provide support from the bottom side of the P.C.board.</div> <div>See following examples.</div> <table><tr><th></th><th>Not recommended</th><th>Recommended</th></tr><tr><td>Single sided mounting</td><td></td><td></td></tr><tr><td>Double-sides mounting</td><td></td><td></td></tr></table> <div>When the centering jaw is worn out, it may give mechanical impact on the capacitors to cause crack. Please control the close up dimension of the centering jaw and provide sufficient preventive maintenance and replacement of it.</div> <div>4-2. Amount of adhesive</div> <div></div> <div>Example : CGA4 (CC0805), CGA5 (CC1206)</div> <table><tr><td>a</td><td>0.2mm min.</td></tr><tr><td>b</td><td>70 - 100μm</td></tr><tr><td>c</td><td>Do not touch the solder land</td></tr></table>		Not recommended	Recommended	Single sided mounting			Double-sides mounting			a	0.2mm min.	b	70 - 100μm	c	Do not touch the solder land
	Not recommended	Recommended															
Single sided mounting																	
Double-sides mounting																	
a	0.2mm min.																
b	70 - 100μm																
c	Do not touch the solder land																

No.	Process	Condition																			
5	Soldering	<div><div>5-1. Flux selection</div><div>Although highly-activated flux gives better solderability, substances which increase activity may also degrade the insulation of the chip capacitors. To avoid such degradation, it is recommended following.</div><div><div>1) It is recommended to use a mildly activated rosin flux (less than 0.1wt% chlorine). Strong flux is not recommended.</div><div>2) Excessive flux must be avoided. Please provide proper amount of flux.</div><div>3) When water-soluble flux is used, enough washing is necessary.</div></div><div><div>5-2. Recommended soldering profile by various methods</div><div><div><div>Wave soldering</div></div><div><div>Reflow soldering</div></div></div><div><div>Manual soldering (Solder iron)</div></div><div><div>APPLICATION</div><div>As for CGA4 (CC0805) and CGA5 (CC1206), applied to wave soldering and reflow soldering.</div><div>As for CGA6 (CC1210), CGA8 (CC1812), CGA9 (CC2220), applied only to reflow soldering.</div></div></div></div> <div><div>5-3. Recommended soldering peak temp and peak temp duration</div><table><tr><th rowspan="2">Temp./Duration Solder</th><th colspan="2">Wave soldering</th><th colspan="2">Reflow soldering</th></tr><tr><th>Peak temp(°C)</th><th>Duration(sec.)</th><th>Peak temp(°C)</th><th>Duration(sec.)</th></tr><tr><td>Sn-Pb Solder</td><td>250 max.</td><td>3 max.</td><td>230 max.</td><td>20 max.</td></tr><tr><td>Lead Free Solder</td><td>260 max.</td><td>5 max.</td><td>260 max.</td><td>10 max.</td></tr></table><div><div>Recommended solder compositions</div><div>Sn-37Pb (Sn-Pb solder)</div><div>Sn-3.0Ag-0.5Cu (Lead Free Solder)</div></div></div>	Temp./Duration Solder	Wave soldering		Reflow soldering		Peak temp(°C)	Duration(sec.)	Peak temp(°C)	Duration(sec.)	Sn-Pb Solder	250 max.	3 max.	230 max.	20 max.	Lead Free Solder	260 max.	5 max.	260 max.	10 max.
Temp./Duration Solder	Wave soldering			Reflow soldering																	
	Peak temp(°C)	Duration(sec.)	Peak temp(°C)	Duration(sec.)																	
Sn-Pb Solder	250 max.	3 max.	230 max.	20 max.																	
Lead Free Solder	260 max.	5 max.	260 max.	10 max.																	

No.	Process	Condition																
5	Soldering	5-4. Avoiding thermal shock																
		1) Preheating condition																
		<table><tr><th>Soldering</th><th>Type</th><th>Temp. (°C)</th></tr><tr><td>Wave soldering</td><td>CGA4(CC0805), CGA5(CC1206)</td><td>$\Delta T \leq 150$</td></tr><tr><td rowspan="2">Reflow soldering</td><td>CGA4(CC0805), CGA5(CC1206)</td><td>$\Delta T \leq 150$</td></tr><tr><td>CGA6(CC1210), CGA8(CC1812), CGA9(CC2220)</td><td>$\Delta T \leq 130$</td></tr><tr><td rowspan="2">Manual soldering</td><td>CGA4(CC0805), CGA5(CC1206)</td><td>$\Delta T \leq 150$</td></tr><tr><td>CGA6(CC1210), CGA8(CC1812), CGA9(CC2220)</td><td>$\Delta T \leq 130$</td></tr></table>	Soldering	Type	Temp. (°C)	Wave soldering	CGA4(CC0805), CGA5(CC1206)	$\Delta T \leq 150$	Reflow soldering	CGA4(CC0805), CGA5(CC1206)	$\Delta T \leq 150$	CGA6(CC1210), CGA8(CC1812), CGA9(CC2220)	$\Delta T \leq 130$	Manual soldering	CGA4(CC0805), CGA5(CC1206)	$\Delta T \leq 150$	CGA6(CC1210), CGA8(CC1812), CGA9(CC2220)	$\Delta T \leq 130$
		Soldering	Type	Temp. (°C)														
		Wave soldering	CGA4(CC0805), CGA5(CC1206)	$\Delta T \leq 150$														
		Reflow soldering	CGA4(CC0805), CGA5(CC1206)	$\Delta T \leq 150$														
			CGA6(CC1210), CGA8(CC1812), CGA9(CC2220)	$\Delta T \leq 130$														
		Manual soldering	CGA4(CC0805), CGA5(CC1206)	$\Delta T \leq 150$														
			CGA6(CC1210), CGA8(CC1812), CGA9(CC2220)	$\Delta T \leq 130$														
		2) Cooling condition																
Natural cooling using air is recommended. If the chips are dipped into a solvent for cleaning, the temperature difference (ΔT) must be less than 100°C.																		
5-5. Amount of solder																		
Excessive solder will induce higher tensile force in chip capacitors when temperature changes and it may result in chip cracking. In sufficient solder may detach the capacitors from the P.C.board.																		
Excessive solder		Higher tensile force in chip capacitors to cause crack																
Adequate																		
Insufficient solder		Low robustness may cause contact failure or chip capacitors come off the P.C.board.																
5-6. Solder repair by solder iron																		
1) Selection of the soldering iron tip																		
Tip temperature of solder iron varies by its type, P.C.board material and solder land size. The higher the tip temperature, the quicker the operation. However, heat shock may cause a crack in the chip capacitors. Please make sure the tip temp. before soldering and keep the peak temp and time in accordance with following recommended condition. (Please preheat the chip capacitors with the condition in 5-4 to avoid the thermal shock.)																		
Recommended solder iron condition (Sn-Pb Solder and Lead Free Solder)																		
Temp. (°C)	Duration (sec.)	Wattage (W)	Shape (mm)															
300 max.	3 max.	20 max.	Ø 3.0 max.															

No.	Process	Condition
5	Soldering	<p>2) Direct contact of the soldering iron with ceramic dielectric of chip capacitors may cause crack. Do not touch the ceramic dielectric and the terminations by solder iron.</p> <p>5-7. Sn-Zn solder Sn-Zn solder affects product reliability. Please contact TDK in advance when utilize Sn-Zn solder.</p> <p>5-8. Countermeasure for tombstone The misalignment between the mounted positions of the capacitors and the land patterns should be minimized. The tombstone phenomenon may occur especially the capacitors are mounted (in longitudinal direction) in the same direction of the reflow soldering. (Refer to JEITA RCR-2335B Annex 1 (Informative) Recommendations to prevent the tombstone phenomenon)</p>
6	Cleaning	<p>1) If an unsuitable cleaning fluid is used, flux residue or some foreign articles may stick to chip capacitors surface to deteriorate especially the insulation resistance.</p> <p>2) If cleaning condition is not suitable, it may damage the chip capacitors.</p> <p>2)-1. Insufficient washing (1) Terminal electrodes may corrode by Halogen in the flux.</p> <p>(2) Halogen in the flux may adhere on the surface of capacitors, and lower the insulation resistance.</p> <p>(3) Water soluble flux has higher tendency to have above mentioned problems (1) and (2).</p> <p>2)-2. Excessive washing When ultrasonic cleaning is used, excessively high ultrasonic energy output can affect the connection between the ceramic chip capacitor's body and the terminal electrode. To avoid this, following is the recommended condition.</p> <p style="text-align: center;">Power : 20 W/ℓ max. Frequency : 40 kHz max. Washing time : 5 minutes max.</p> <p>2)-3. If the cleaning fluid is contaminated, density of Halogen increases, and it may bring the same result as insufficient cleaning.</p>

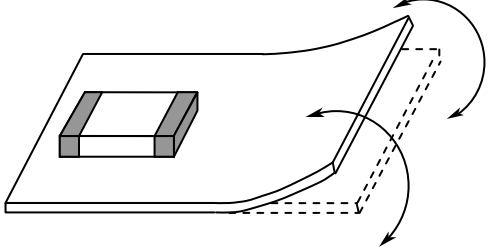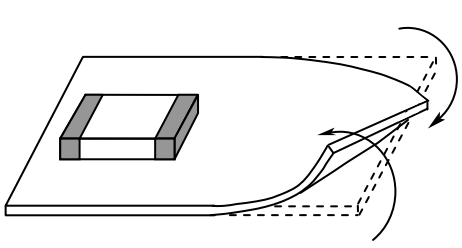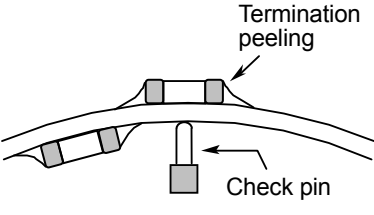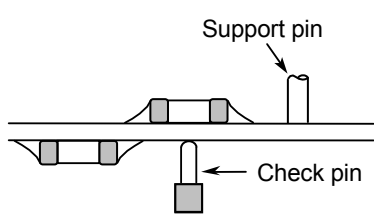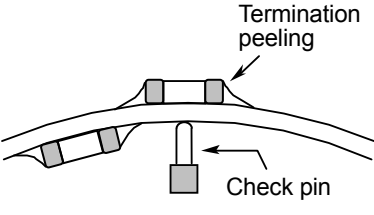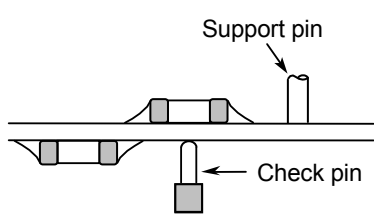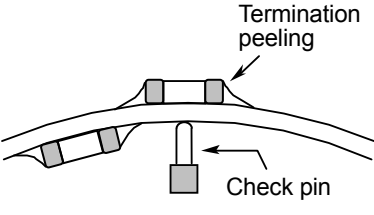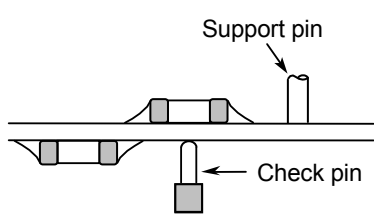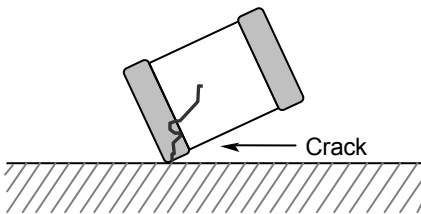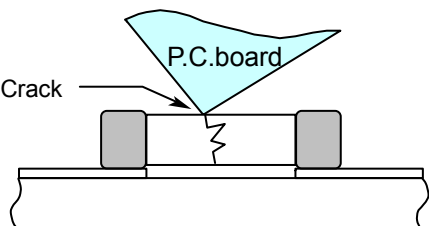No.	Process	Condition						
7	Coating and molding of the P.C.board	<p>1) When the P.C.board is coated, please verify the quality influence on the product.</p> <p>2) Please verify carefully that there is no harmful decomposing or reaction gas emission during curing which may damage the chip capacitors.</p> <p>3) Please verify the curing temperature.</p>						
8	Handling after chip mounted ⚠ Caution	<p>1) Please pay attention not to bend or distort the P.C.board after soldering in handling otherwise the chip capacitors may crack.</p> <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> <p>Bend</p>  </div> <div style="text-align: center;"> <p>Twist</p>  </div> </div> <p>2) When functional check of the P.C.board is performed, check pin pressure tends to be adjusted higher for fear of loose contact. But if the pressure is excessive and bend the P.C.board, it may crack the chip capacitors or peel the terminations off. Please adjust the check pins not to bend the P.C.board.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 15%;">Item</th><th style="width: 40%;">Not recommended</th><th style="width: 45%;">Recommended</th></tr> </thead> <tbody> <tr> <td style="text-align: center; vertical-align: middle;">Board bending</td><td style="text-align: center; vertical-align: middle;">  <p style="text-align: center;">Termination peeling</p> <p style="text-align: center;">Check pin</p> </td><td style="text-align: center; vertical-align: middle;">  <p style="text-align: center;">Support pin</p> <p style="text-align: center;">Check pin</p> </td></tr> </tbody> </table>	Item	Not recommended	Recommended	Board bending	 <p style="text-align: center;">Termination peeling</p> <p style="text-align: center;">Check pin</p>	 <p style="text-align: center;">Support pin</p> <p style="text-align: center;">Check pin</p>
Item	Not recommended	Recommended						
Board bending	 <p style="text-align: center;">Termination peeling</p> <p style="text-align: center;">Check pin</p>	 <p style="text-align: center;">Support pin</p> <p style="text-align: center;">Check pin</p>						
9	Handling of loose chip capacitors	<p>1) If dropped the chip capacitors may crack. Once dropped do not use it. Especially, the large case sized chip capacitors are tendency to have cracks easily, so please handle with care.</p> <div style="text-align: center;">  <p style="text-align: center;">Crack</p> <p style="text-align: center;">Floor</p> </div> <p>2) Piling the P.C.board after mounting for storage or handling, the corner of the P.C. board may hit the chip capacitors of another board to cause crack.</p> <div style="text-align: center;">  <p style="text-align: center;">Crack</p> <p style="text-align: center;">P.C.board</p> </div>						

No.	Process	Condition
10	Capacitance aging	The capacitors (Class 2) have aging in the capacitance. They may not be used in precision time constant circuit. In case of the time constant circuit, the evaluation should be done well.
11	Estimated life and estimated failure rate of capacitors	As per the estimated life and the estimated failure rate depend on the temperature and the voltage. This can be calculated by the equation described in JEITA RCR-2335B Annex 6 (Informative) Calculation of the estimated lifetime and the estimated failure rate (Voltage acceleration coefficient : 3 multiplication rule, Temperature acceleration coefficient : 10°C rule) The failure rate can be decreased by reducing the temperature and the voltage but they will not be guaranteed.
12	Others ⚠ Caution	<p>The products listed on this specification sheet are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.</p> <p>The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property. Please understand that we are not responsible for any damage or liability caused by use of the products in any of the applications below or for any other use exceeding the range or conditions set forth in this specification sheet. If you intend to use the products in the applications listed below or if you have special requirements exceeding the range or conditions set forth in this specification, please contact us.</p> <p>(1) Aerospace/Aviation equipment (2) Transportation equipment (cars, electric trains, ships, etc.) (3) Medical equipment (4) Power-generation control equipment (5) Atomic energy-related equipment (6) Seabed equipment (7) Transportation control equipment (8) Public information-processing equipment (9) Military equipment (10) Electric heating apparatus, burning equipment (11) Disaster prevention/crime prevention equipment (12) Safety equipment (13) Other applications that are not considered general-purpose applications</p> <p>When designing your equipment even for general-purpose applications, you are kindly requested to take into consideration securing protection circuit/device or providing backup circuits in your equipment.</p>

13. Packaging label

Packaging shall be done to protect the components from the damage during transportation and storing, and a label which has the following information shall be attached.

- 1) Inspection No.
- 2) TDK P/N
- 3) Customer's P/N
- 4) Quantity

*Composition of Inspection No.

Example F 2 A – 00 – 000
 (a) (b) (c) (d) (e)

- a) Line code
- b) Last digit of the year
- c) Month and A for January and B for February and so on. (Skip I)
- d) Inspection Date of the month.
- e) Serial No. of the day

14. Bulk packaging quantity

Total number of components in a plastic bag for bulk packaging : 1,000pcs.

15. TAPE PACKAGING SPECIFICATION

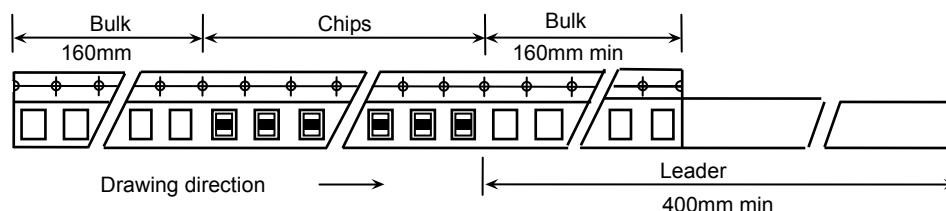
1. CONSTRUCTION AND DIMENSION OF TAPING

1-1. Dimensions of carrier tape

Dimensions of paper tape shall be according to Appendix 3.

Dimensions of plastic tape shall be according to Appendix 4, 5.

1-2. Bulk part and leader of taping




1-3. Dimensions of reel

Dimensions of Ø178 reel shall be according to Appendix 6, 7.

Dimensions of Ø330 reel shall be according to Appendix 8, 9.

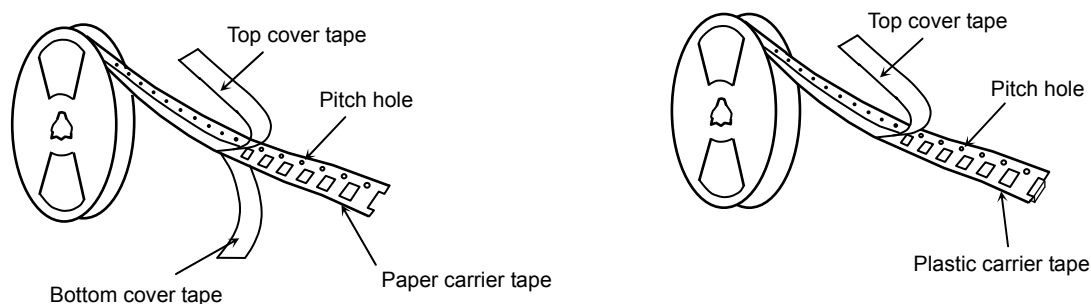1-4. Structure of taping



2. CHIP QUANTITY


Type	Thickness of chip	Taping Material	Chip quantity(pcs.)	
			φ178mm reel	φ330mm reel
CGA4 (CC0805)	0.85 mm	Paper	4,000	10,000
	1.25 mm	Plastic	2,000	
CGA5 (CC1206)	1.15 mm	Plastic	2,000	10,000
	1.30 mm			8,000
	1.60 mm			
CGA6 (CC1210)	1.60 mm	Plastic	2,000	8,000
	2.00 mm		1,000	5,000
	2.30 mm			
	2.50 mm			
CGA8 (CC1812)	2.00 mm	Plastic	1,000	3,000
	2.30 mm		500	
	2.50 mm			
CGA9 (CC2220)	2.30 mm	Plastic	500	3,000
	2.50 mm			

3. PERFORMANCE SPECIFICATIONS


3-1. Fixing peeling strength (top tape)

0.05-0.7N. (See the following figure.)

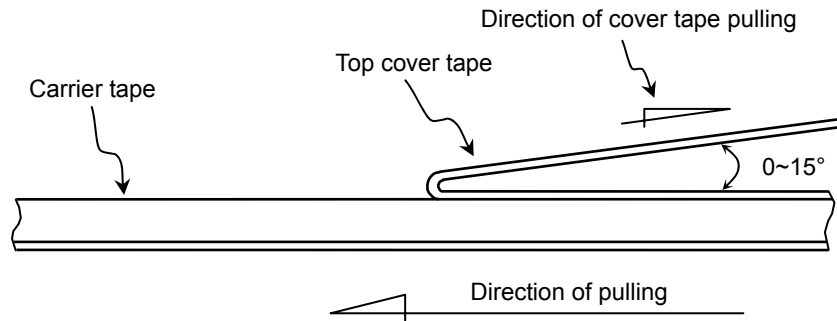TYPE 1 (Paper)



TYPE 2 (Plastic)

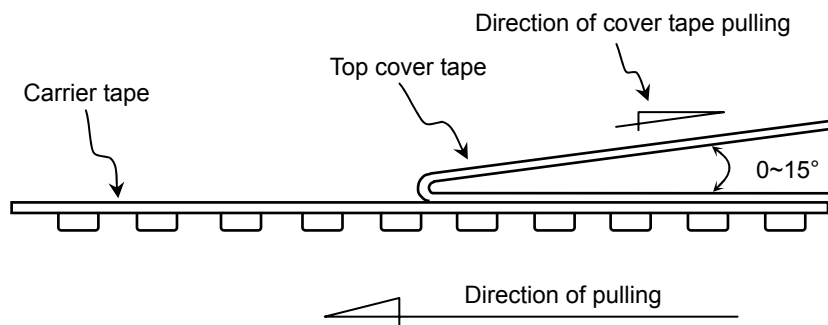

3-2. Carrier tape shall be flexible enough to be wound around a minimum radius of 30mm with components in tape.


3-3. The missing of components shall be less than 0.1%

3-4. Components shall not stick to fixing tape.

3-5. The fixing tapes shall not protrude beyond the edges of the carrier tape
not shall cover the sprocket holes.

Appendix 3

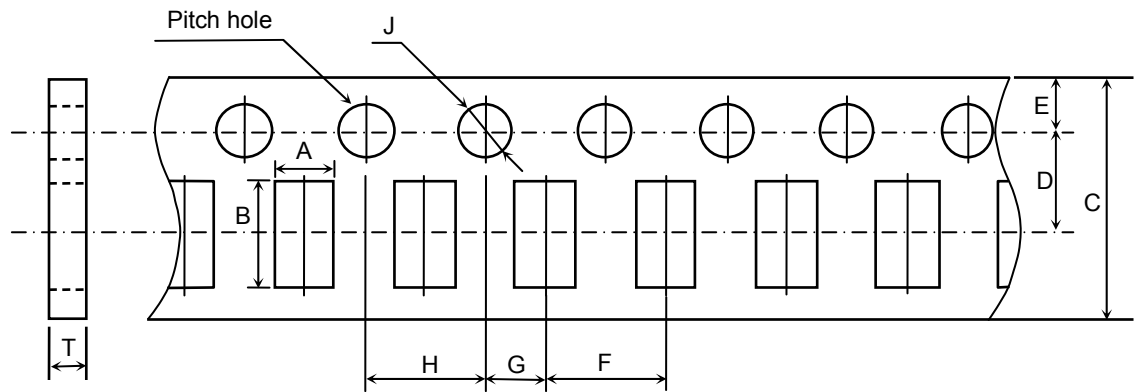Paper Tape



(Unit : mm)


Symbol Type	A	B	C	D	E	F
CGA4 (CC0805)	(1.50)	(2.30)	8.00 ± 0.30	3.50 ± 0.05	1.75 ± 0.10	4.00 ± 0.10

Symbol Type	G	H	J	T
CGA4 (CC0805)	2.00 ± 0.05	4.00 ± 0.10	$\varnothing 1.5 \begin{smallmatrix} +0.10 \\ 0 \end{smallmatrix}$	1.10 max.

* The values in the parentheses () are for reference.

Appendix 4

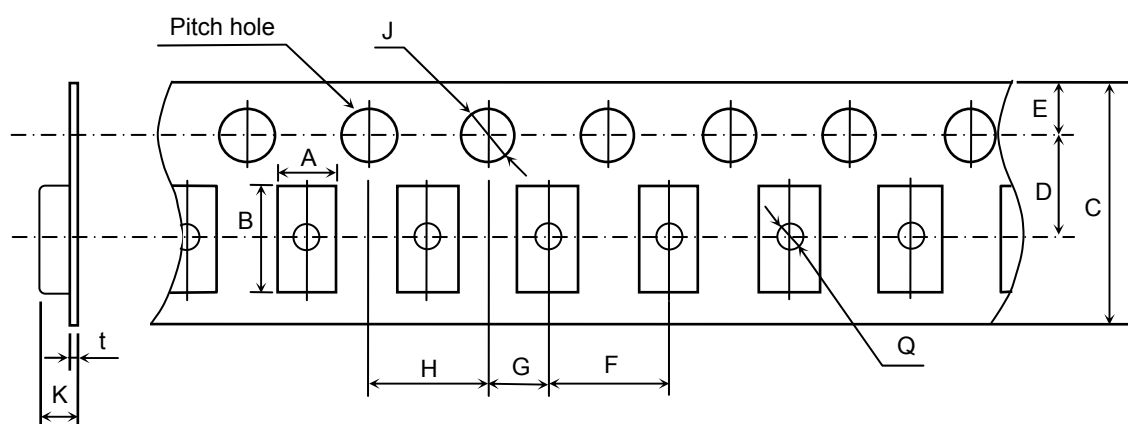Plastic Tape



(Unit : mm)

Symbol Type	A	B	C	D	E	F
CGA4 (CC0805)	(1.50)	(2.30)	8.00 ± 0.30	3.50 ± 0.05	1.75 ± 0.10	4.00 ± 0.10
CGA5 (CC1206)	(1.90)	(3.50)				
CGA6 (CC1210)	(2.90)	(3.60)	8.00 ± 0.30 or 12.0 ± 0.30	3.50 ± 0.05 or 5.50 ± 0.05		


Symbol Type	G	H	J	K	t	Q
CGA4 (CC0805)	2.00 ± 0.05	4.00 ± 0.10	Ø 1.5 ^{+0.10} ₀	2.50 max.	0.60 max.	Ø 0.50 min.
CGA5 (CC1206)				3.20 max.		
CGA6 (CC1210)						

* The values in the parentheses () are for reference.

* Exceptionally no hole in the cavity is applied. Please inquire if hole in cavity is mandatory.

Appendix 5

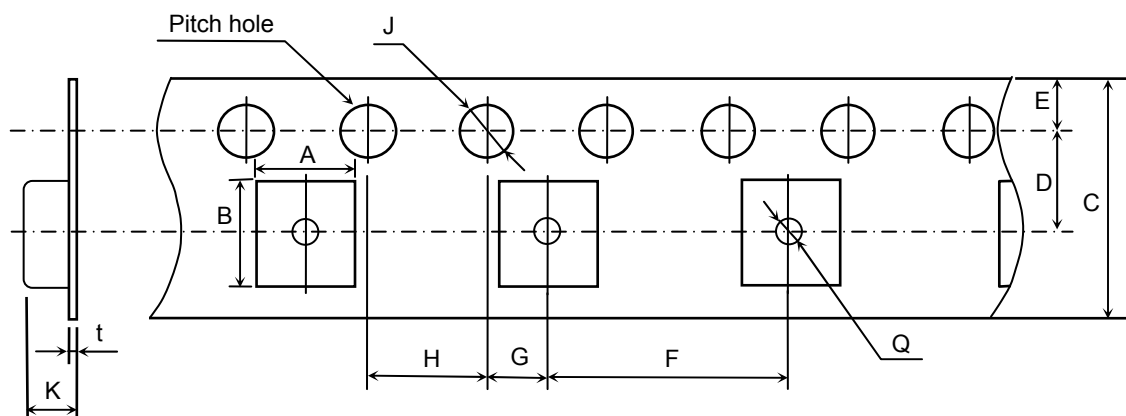Plastic Tape



(Unit : mm)


Symbol Type	A	B	C	D	E	F
CGA8 (CC1812)	(3.60)	(4.90)	12.0 ± 0.30	5.50 ± 0.05	1.75 ± 0.10	8.00 ± 0.10
CGA9 (CC2220)	(5.70)	(6.40)				
Symbol Type	G	H	J	K	t	Q
CGA8 (CC1812)	2.00 ± 0.05	4.00 ± 0.10	$\varnothing 1.5 \begin{smallmatrix} +0.10 \\ 0 \end{smallmatrix}$	6.50 max.	0.60 max.	$\varnothing 1.50 \text{ min.}$
CGA9 (CC2220)						

* The values in the parentheses () are for reference.

Appendix 6

CGA4, CGA5, CGA6

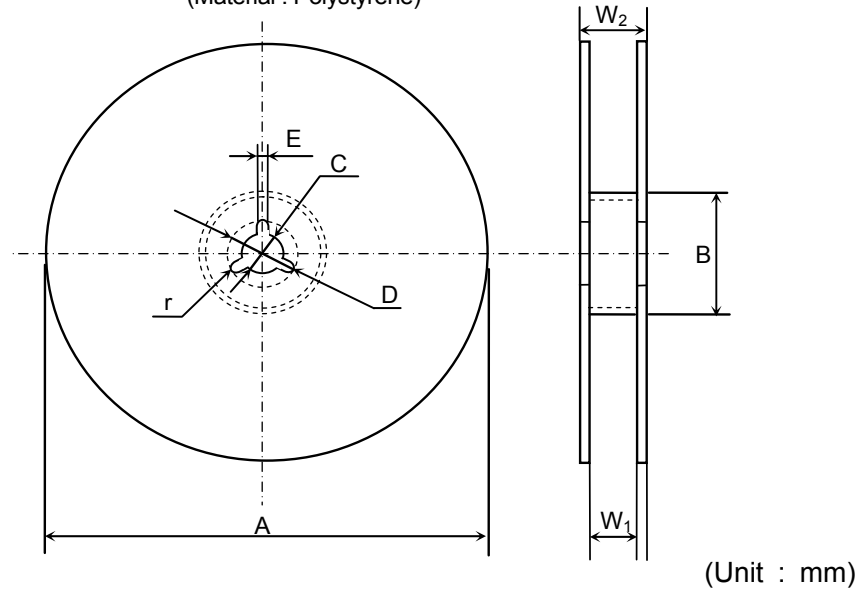(Material : Polystyrene)




Symbol	A	B	C	D	E	W ₁
Dimension	Ø178 ± 2.0	Ø60 ± 2.0	Ø13 ± 0.5	Ø21 ± 0.8	2.0 ± 0.5	9.0 ± 0.3

Symbol	W ₂	r
Dimension	13.0 ± 1.4	1.0

Appendix 7

CGA6 12mm width taping type, CGA8, CGA9

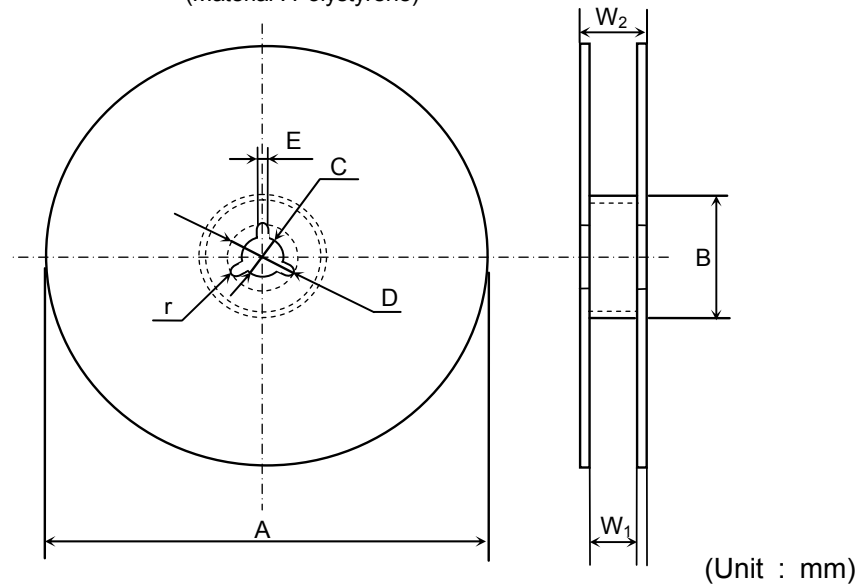(Material : Polystyrene)




Symbol	A	B	C	D	E	W ₁
Dimension	Ø178 ± 2.0	Ø60 ± 2.0	Ø13 ± 0.5	Ø21 ± 0.8	2.0 ± 0.5	13.0 ± 0.3

Symbol	W ₂	r
Dimension	17.0 ± 1.4	1.0

Appendix 8

CGA4, CGA5, CGA6

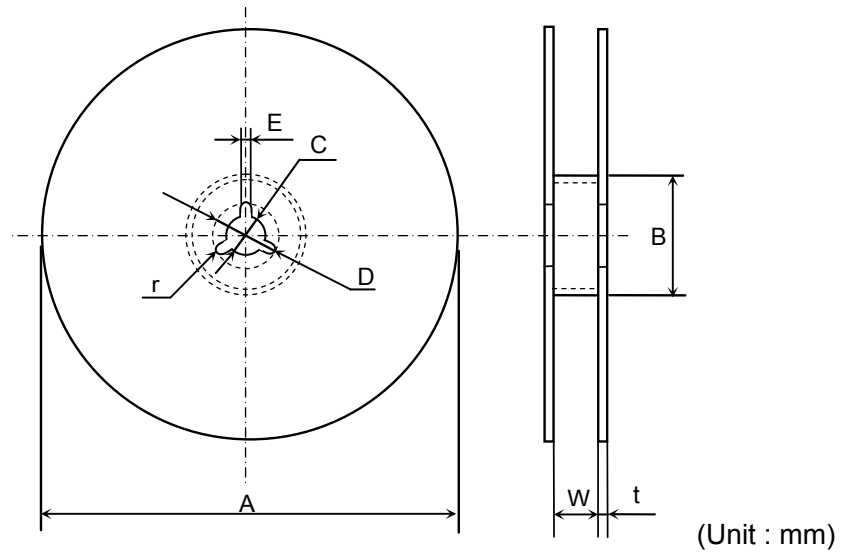(Material : Polystyrene)




Symbol	A	B	C	D	E	W
Dimension	Ø382 max. (Nominal Ø330)	Ø50 min.	Ø13 ± 0.5	Ø21 ± 0.8	2.0 ± 0.5	10.0 ± 1.5

Symbol	t	r
Dimension	2.0 ± 0.5	1.0

Appendix 9

CGA6 12mm width taping type, CGA8, CGA9

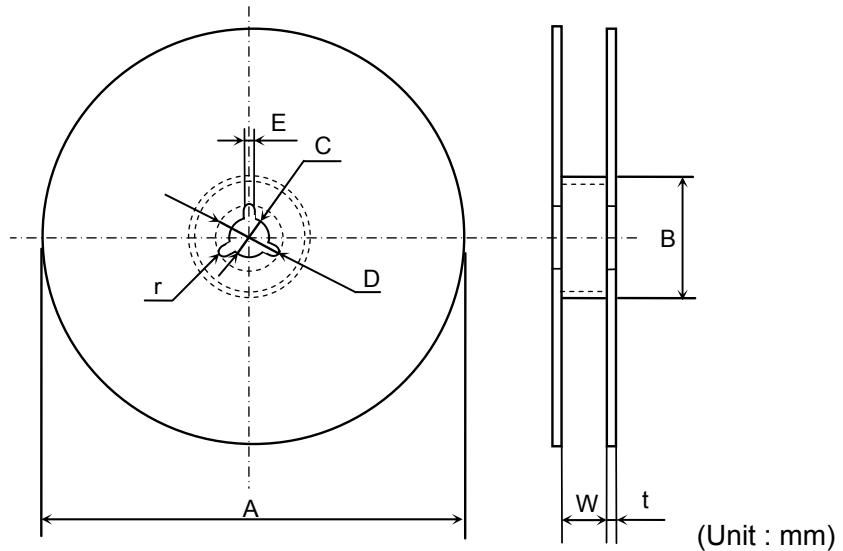(Material : Polystyrene)



Symbol	A	B	C	D	E	W
Dimension	Ø382 max. (Nominal Ø330)	Ø50 min.	Ø13 ± 0.5	Ø21 ± 0.8	2.0 ± 0.5	14.0 ± 1.5

Symbol	t	r
Dimension	2.0 ± 0.5	1.0