### **HPR1XXWC** Series

0.75 Watt Single Output DC/DC Converter

## muRata 🖊 **Murata Power Solutions**



#### **FEATURES**

- Low Cost
- Multiple Package Styles
- Internal Input and Output
- Filtering
- Non-Conductive Case
- High Output Power Density: 10 Watts/Inch3
- Extended Temperature Range: -25°C to +85°C
- Efficiency to 79%
- RoHS Compliant

# **OBSOLETE PRODUCT**

**Contact Factory for Replacement Model** 

The HPR1XXWC Series uses advanced circuit design and packaging technology to deliver superior reliability and performance. A 170kHz push-pull oscillator is used in the input stage. Beat-frequency oscillation problems are reduced when using the HPR1XXWC Series with high frequency isolation amplifiers.

Reduced parts count and high efficiency add to the reliability of the HPR1XXWC Series. The high efficiency of the HPR1XXWC Series means less internal power dissipation, as low as 190mW.

With reduced heat dissipation the HPR1XXWC Series can operate at higher temperatures with no degradation. In addition, the high efficiency of the HPR1XXWC Series means the series is able to offer greater than 10 W/inch3 of output power density. Operation down to no load will not impact the reliability of the series, although a >1mA minimum load is needed to realize published specifications.

The HPR1XXWC Series provides the user a low cost converter without sacrificing reliability. The use of surface mounted devices and advanced manufacturing technologies make it possible to offer premium performance and low cost.

All specifications are typical at  $TA = +25^{\circ}C$  nominal input voltage unless otherwise specified.

Model		Nominal Input Voltage V <sub>DC</sub>	Rated Output Voltage VDC	Rated Output Current mA	Input Current		Reflected		
					No Load	Rated Load Typ.	Ripple Current	Efficiency	Recommended Alternatives
					mA		mAp-p	%	
NRND*	HPR100WC	5	5	150	20	216	10	69	NTE0505MC
OBSOLETE	HPR105WC	5	±15	±25	20	200	5	75	NTA0515MC
NRND*	HPR109WC	12	±5	±75	10	88	5	71	NTA1205MC
OBSOLETE	HPR101WC	5	12	62	20	212	5	70	NTE0512MC
OBSOLETE	HPR102WC	5	15	50	20	212	5	71	NTE0515MC
OBSOLETE	HPR103WC	5	±5	±75	20	218	5	68	NTA0505MC
OBSOLETE	HPR104WC	5	±12	±30	20	212	5	68	NTA0512MC
OBSOLETE	HPR106WC	12	5	150	10	90	5	69	NTE1205MC
OBSOLETE	HPR107WC	12	12	62	10	81	5	77	NTE1212MC
OBSOLETE	HPR108WC	12	15	50	10	81	5	77	NTE1215MC
OBSOLETE	HPR110WC	12	±12	±30	10	81	5	74	NTA1212MC
OBSOLETE	HPR111WC	12	±15	±25	10	81	5	77	NTA1215MC
OBSOLETE	HPR112WC	15	5	150	8	72	5	69	-
OBSOLETE	HPR113WC	15	12	62	8	72	5	69	-
OBSOLETE	HPR114WC	15	15	50	8	72	5	69	-
OBSOLETE	HPR115WC	15	±5	±75	8	72	5	69	-
OBSOLETE	HPR116WC	15	±12	±30	8	63	5	76	-
OBSOLETE	HPR117WC	15	±15	±25	8	63	5	79	-
OBSOLETE	HPR118WC	24	5	150	8	48	15	65	-
OBSOLETE	HPR119WC	24	12	62	8	48	15	65	-
OBSOLETE	HPR120WC	24	15	50	8	45	15	76	-
OBSOLETE	HPR121WC	24	±5	±75	8	45	15	69	-
OBSOLETE	HPR122WC	24	±12	±30	8	45	15	67	-
OBSOLETE	HPR123WC	24	±15	±25	8	45	15	69	-



\*Not Recommended for New Designs

www.murata-ps.com/support

For full details go to

### muRata Ps Murata Power Solutions

### **HPR1XXWC Series**

0.75 Watt Single Output DC/DC Converter

**SPECIFICATIONS, ALL MODELS** Specifications are at  $T_A = +25^{\circ}$ C nominal input voltage unless otherwise specified.

	PARAMETER	CONDITIONS	MIN	ТҮР	MAX	UNITS
5	INPUT					
INPUT	Voltage Range		4.5	5	5.5	VDC
<b></b>			10.8	12	13.2	VDC
		-	13.5	15	16.5	VDC
		-	21.6	24	26.4	VDC
	Voltage Rise Time See Typical Pe	rformance Curves & Application N	lotes: "Capacitive	Loading Effects on	Start-Up of DC/D	C Converters"
	OUTPUT					
	Rated Power				750	mW
E	Voltage Setpoint Accuracy	Rated Load, Nominal V <sub>IN</sub>			±5	%
OUTPUT	Ripple & Noise	BW = DC to 10MHz		150	200	mVp-p
5		BW =10Hz to 2MHz		30	40	mVrms
0	Voltage (Over Input Voltage Range)	1mA to Rated Current, $V_{OUT} = 5V$	4.75		7	VDC
		1mA to Rated Current, $V_{OUT} = 12V$	11.40		15	VDC
		1mA to Rated Current, $V_{OUT} = 15V$	14.25		18	VDC
	Temperature Coefficent	001		.01	.05	%/ °C
	REGULATION					
	Load Regulation (All other modes)	Rated Load to 1mA Load		3		%
	GENERAL					
	ISOLATION					
	Rated Voltage		750			VDC
	Test Voltage	60 Hz, 10 Seconds	750			Vrms
	Resistance		10			GΩ
_	Capacitance			25	100	pF
GENERAL	Leakage Current	V <sub>ISO</sub> = 240VAC, 60Hz		2	8.5	μArms
Ψ	Switching Frequency			170		kHz
μ̈́.	Frequency Change	Over Line and Load		24		%
C	Package Weight				3	g
	MTTF per MIL-HDBK-217, Rev. F*	Circuit Stress Method				
	Ground Benign	T <sub>A</sub> = +25°C	7.9			MHr
	Fixed Ground	T <sub>A</sub> =+35°C	1.9			MHr
	Naval Sheltered	T <sub>A</sub> =+35°C	1.2			MHr
	Airborne Uninhabited Fighter	T <sub>A</sub> = +35°C	300			kHr
	TEMPERATURE					
	Specification		-25	+25	+85	°C
	Operation		-40		+100	°C
	Storage		-40		+110	°C


#### SOLDERING INFORMATION

The surface mount versions of the HPR1XXWC series are designed for SMT reflow soldering. During this standard process devices should be heated at a rate not to exceed 3 degrees C per second. The peak reflow temperature is 260 degrees C. The device should not be exposed to the peak temperature ±10 degrees C for more than 12 seconds. The cool down rate for this device should not exceed 3 degrees C per second.

<u>muRata</u> Ps Murata Power Solutions

### **HPR1XXWC Series**

0.75 Watt Single Output DC/DC Converter

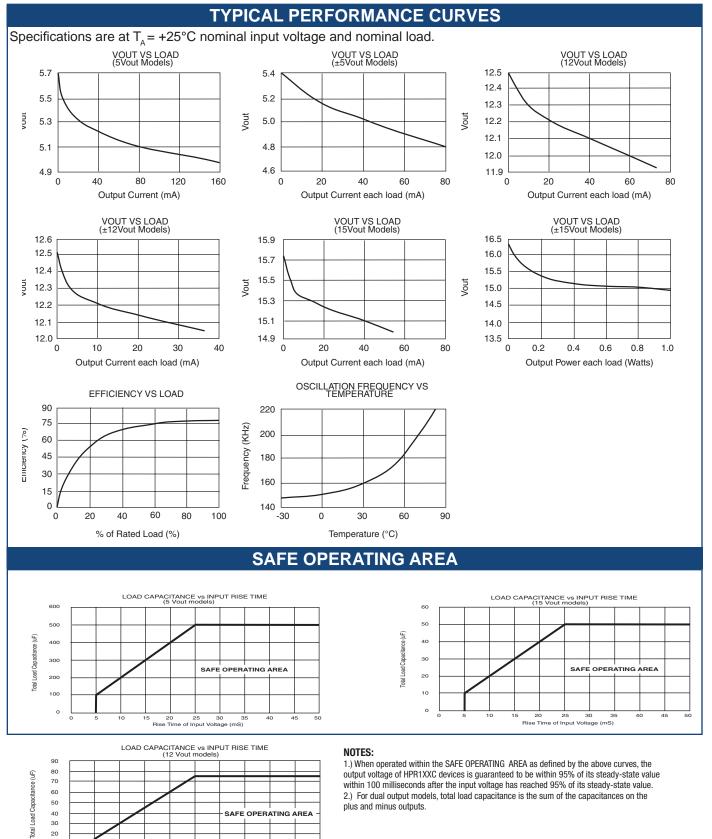

www.murata-ps.com/support

10 15 20

30

35 40 45 50

25


Rise Time of Input Voltage (mS)

20 10 0



### **HPR1XXWC Series**

0.75 Watt Single Output DC/DC Converter

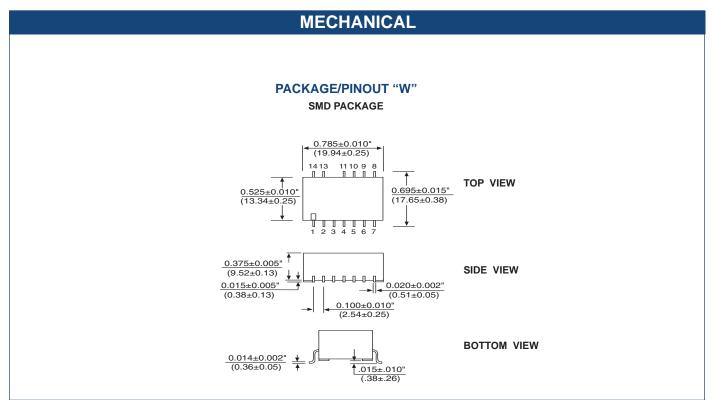

PIN CONNECTIONS						
PIN#	SINGLES	DUALS	PIN#	SINGLES	DUALS	
1 2 3 4 5 6	+VIN -VIN NC NC -VOUT NC	+VIN -VIN NC NC -VOUT Common	7 8 9 10 11 13 14	+VOUT NC NC NC NC NC NC	+VOUT NC NC NC NC NC NC	

#### **ABSOLUTE MAXIMUM RATINGS**

Internal Power Dissipation	450mW
Short Circuit Duration	
Chort Chout Durator	momonary

#### NOTES:

NC = Do Not Connect.


Duplicate pin functions are internally connected.

All dimensions are in inches (millimeters).

GRID: 0.100 inches (2.54 millimeters)

MATERIAL: Lead material is phosphor bronze; lead finish is 100-300 microinches of matte tin over a nickel barrier layer of 5-40 microinches.

### ORDERING INFORMATION



Murata Power Solutions, Inc. 11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A. ISO 9001 and 14001 REGISTERED

Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.