

TPS23753EVM-004: Evaluation Module for TPS23753

This user's guide describes the TPS23753EVM (TPS23753EVM-004). The TPS23753EVM-004 contains evaluation and reference circuitry for the TPS23753. The TPS23753 is an IEEE 802.3-2005 compliant powered-device controller and power supply controller optimized for isolated converter topologies. The TPS23753EVM-004 is targeted at general, efficient, synchronous rectifier, 10-W flyback converter applications.

Contents

1	Description	2
	1.1 Features	2
	1.2 Applications	2
2	Electrical Specifications	3
3	Schematic	4
4	General Configuration and Description	5
	4.1 Physical Access	5
5	Test Setup	6
6	TPS23753EVM-004 Typical Performance Data	6
	6.1 3.3-V Efficiency	6
	6.2 5-V DC/DC Efficiency	7
	6.3 12-V DC/DC Efficiency	7
7	EVM Assembly Drawings and Layout Guidelines	8
	7.1 PCB Drawings	8
8	Bill of Materials	10

List of Figures

1	TPS23753EVM-004 Schematic	4
2	Typical TPS23753EVM-004 Test Setup	6
3	TPS23753EVM-004 Efficiency With 3.3-V Output	6
4	TPS23753EVM-003 Efficiency With 5-V Output	7
5	TPS23753EVM-005 Efficiency With 12-V Output	7
6	Top Side Placement	8
7	Top-Side Routing	9
8	Bottom-Side Routing	9

List of Tables

1	TPS23753EVM-003, -004, and -005 Electrical and Performance Specifications at T = 25°C	3
2	Connector Functionality	5
3	Test Points	5
4	TPS23753EVM-003, -004, and -005 Bill of Materials	10

1 Description

TPS23753EVM-004 allows users to evaluate the reference circuitry of the TPS23753. It contains input and output power connectors and an array of onboard test points for circuit evaluation. TPS23753EVM-003 (5-V output) and TPS23753EVM-005 (12-V output) can be configured with simple bill of materials (BOM) changes.

1.1 Features

- Efficient, general market design
 - Simple gate drive, synchronous rectified secondary
 - 10-W output power from power over Ethernet (PoE), 48-V or 24-V adapter and 6-W output power from a 12-V adapter
 - 5-V or 12-V output voltage with simple BOM changes

1.2 Applications

- Voice over Internet protocol – IP telephones
- Wireless LAN – Wireless access points
- Security – Wired IP cameras


2 Electrical Specifications

Table 1. TPS23753EVM-003, -004, and -005 Electrical and Performance Specifications at T = 25°C

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT	
POWER INTERFACE						
Input Voltage	Applied to the power pins of connectors J2, J4, or J6	0		57	V	
Operating Voltage	After start up	30		57	V	
Input UVLO	Rising input voltage			36	V	
	Falling input voltage	30				
Detection voltage	At device terminals	3		10	mA	
Classification voltage	At device terminals	10		23	mA	
Classification current	Rclass = 1270 Ω	1.8		2.4	mA	
Inrush current-limit		90		190	mA	
Operating current-limit		405		495	mA	
DC/DC CONVERTER						
Output voltage	20 V ≤ Vin ≤ 57 V, ILOAD ≤ ILOAD (max) 10.8 V ≤ Vin ≤ 13.2 V, ILOAD ≤ ILOAD (max)	3.3-V output (-004)	3.13	3.3	3.47	V
		5-V output (-003)	4.75	5.0	5.25	
		12-V output (-005)	11.4	12.0	12.6	
Output current	20 V ≤ Vin ≤ 57 V	3.3-V output			3	A
		5-V output			2	
		12-V output			0.9	
	10.8 V ≤ Vin ≤ 13.2 V	3.3-V output			1.8	A
		5-V output			1.2	
		12-V output			0.5	
Output ripple voltage, peak-to-peak	Vin = 44 V, ILOAD = 3 A	3.3-V output		30	mV	
	Vin = 44 V, ILOAD = 2 A	5-V output		40		
	Vin = 44 V, ILOAD = 0.9 A	12-V output		100		
Efficiency, end-to-end	Vin = 44 V, ILOAD = 2 A	3.3-V output		83	%	
	Vin = 44 V, ILOAD = 1.4 A	5-V output		82	%	
	Vin = 44 V, ILOAD = 0.9 A	12-V output		83	%	
Switching frequency		112		138	kHz	

3 Schematic

The TPS23753EVM-004 schematic follows.

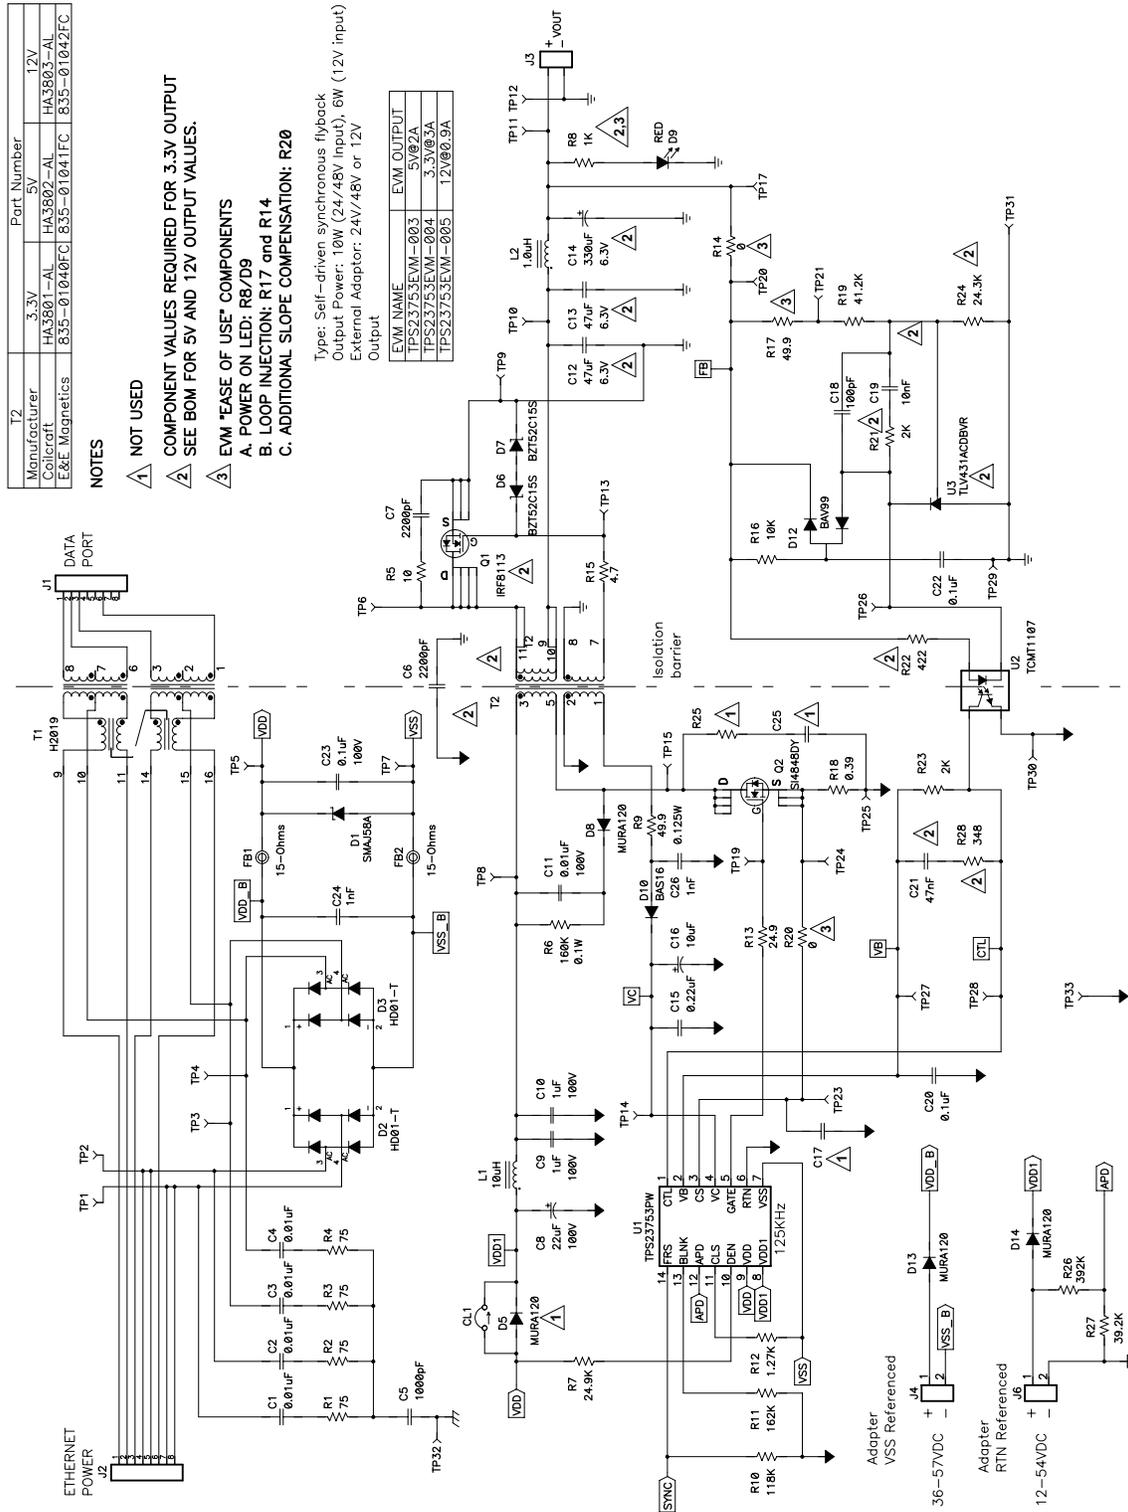

T2		Part Number	
Manufacturer	3.3V	5V	12V
Colicraft	HA3801-AL	HA3802-AL	HA3803-AL
E&E Magnetics	835-01040FC1	835-01041FC	835-01042FC

NOTES

- ⚠ NOT USED
- ⚠ COMPONENT VALUES REQUIRED FOR 3.3V OUTPUT
SEE BOM FOR 5V AND 12V OUTPUT VALUES.
- ⚠ EVB "EASE OF USE" COMPONENTS
A. POWER ON LED: R8/D9
B. LOOP INJECTION: R17 and R14
C. ADDITIONAL SLOPE COMPENSATION: R20

Type: Self-driven synchronous flyback
 Output Power: 10W (24/48V Input), 6W (12V input)
 External Adaptor: 24V/48V or 12V
 Output

EVM NAME	EVM OUTPUT
TPS23753EVM-003	5V/62A
TPS23753EVM-004	3.3V/63A
TPS23753EVM-005	12V/60.9A

Figure 1. TPS23753EVM-004 Schematic

4 General Configuration and Description

4.1 Physical Access

Table 2 lists the TPS23753EVM-004 connector functionality and Table 3 describes the test point availability.

Table 2. Connector Functionality

Connector	Label	Description
J1	DATA PORT	Ethernet data port connector
J2	ETHERNET POWER	Ethernet power input connector. Contains Ethernet transformer and cable terminations
J3	VOUT	Output voltage connector
J4	ADP-VSS	VSS referenced external adapter input connector. J4-1/J4-1 are used with a powered-device adapter input (VSS)
J6	AP-RTN	RTN referenced external adapter input connector. J6-1/J6-2 are used with DC/DC converter adapter input (RTN) and

Table 3. Test Points

Test Point	Color	Label	Description
TP9, TP12, TP29, TP31	BLK	GND	Secondary-side (output) grounds (GND)
TP14	RED	VC	DC/DC converter bias supply
TP15	ORG	DR-P	Drain terminal of the primary-side switching MOSFET
TP7	BLK	VSS	POE input, low side
TP25, TP30, TP33	BLK	RTN	DC/DC converter return
TP20.	ORG	LOOP	Can be used with TP17 for overall feedback loop measurements.
TP21	WHT	I-LOOP	Can be used with TP17 for outer feedback loop measurements.
TP11, TP17	RED	VOUT	DC/DC converter output voltage.
TP10	RED	VOUT1	DC/DC converter output voltage (before LC filter).
TP13	WHT	GTS	Gate drive for the secondary-side synchronous rectifier MOSFET
TP6	WHT	DR-S	Drain terminal of the secondary-side synchronous rectifier MOSFET
TP28	WHT	CTL	Control loop input to the pulse width modulator
TP24	WHT	RCS	DC/DC converter primary-side switching MOSFET current sense (resistor side)
TP23	WHT	CS	DC/DC converter primary-side switching MOSFET current sense input (chip side)
TP27	RED	VB	Bias voltage regulator
TP19	WHT	GATE	Gate drive for the primary-side switching MOSFET
TP8	RED	VPRI	Transformer primary high side.
TP26	WHT	VKAT	Error amplifier (secondary-side) output drive for opto-isolator
TP1	RED	PR78	Pair 7,8
TP4	RED	PR12	Pair 1,2
TP2	ORG	PR45	Pair 4,5
TP3	ORG	PR36	Pair 3,6
D9	RED	POWER ON	Output power indicator

5 Test Setup

Figure 2 shows a typical test setup for TPS23753EVM-004. Input voltage can be applied as described in Table 2.

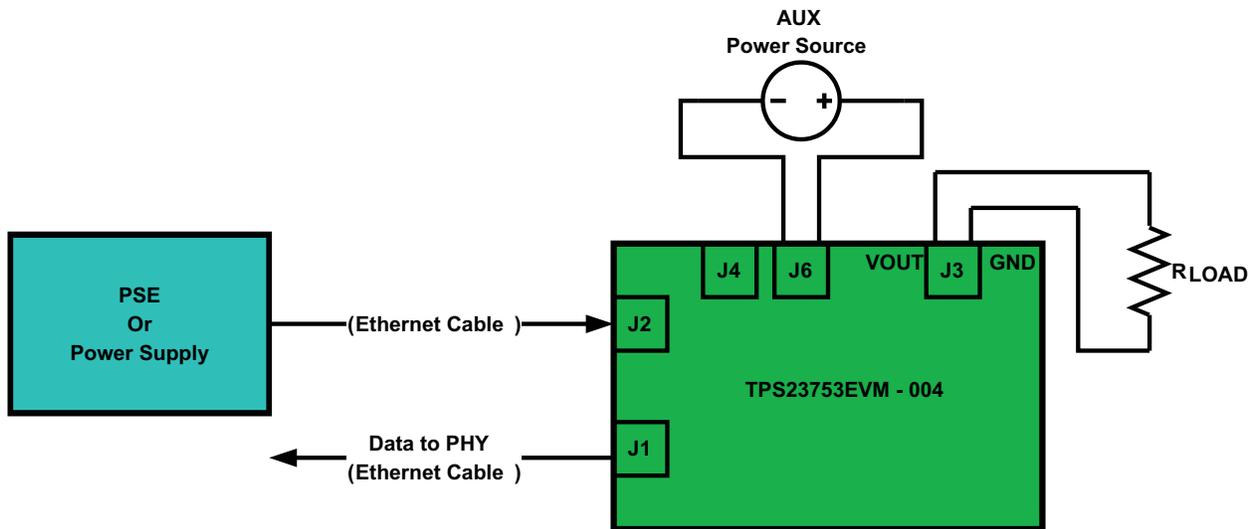


Figure 2. Typical TPS23753EVM-004 Test Setup

6 TPS23753EVM-004 Typical Performance Data

6.1 3.3-V Efficiency

Figure 3 illustrates the efficiency at three different input voltage levels: 1) PoE 48V from J2, 2) 48V RTN-based adapter, and 3) 24V RTN-based adapter.

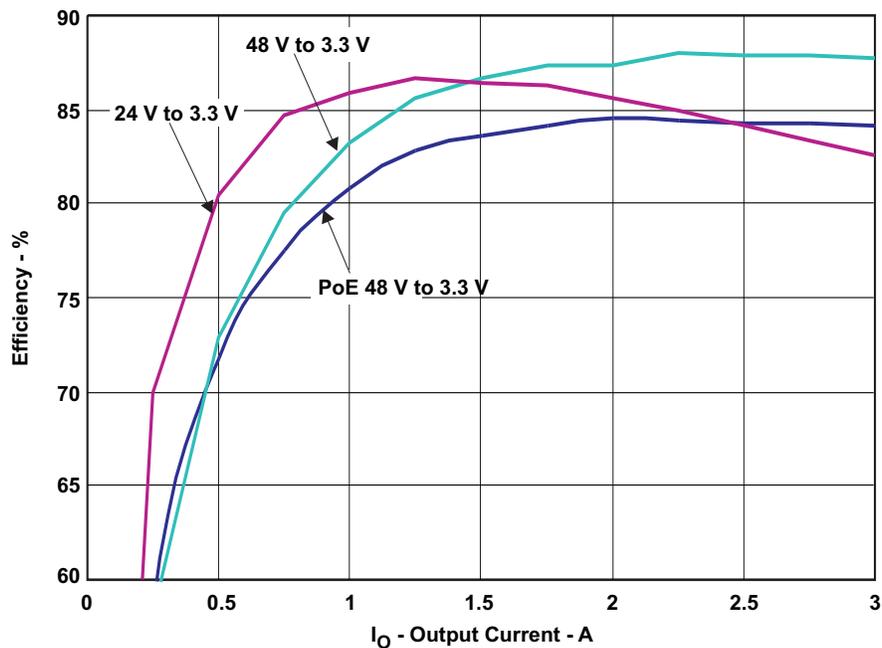


Figure 3. TPS23753EVM-004 Efficiency With 3.3-V Output

6.2 5-V DC/DC Efficiency

Figure 4 illustrates the efficiency at three different input voltage levels: 1) PoE 48V from J2, 2) 48V RTN-based adapter, and 3) 24V RTN-based adapter.

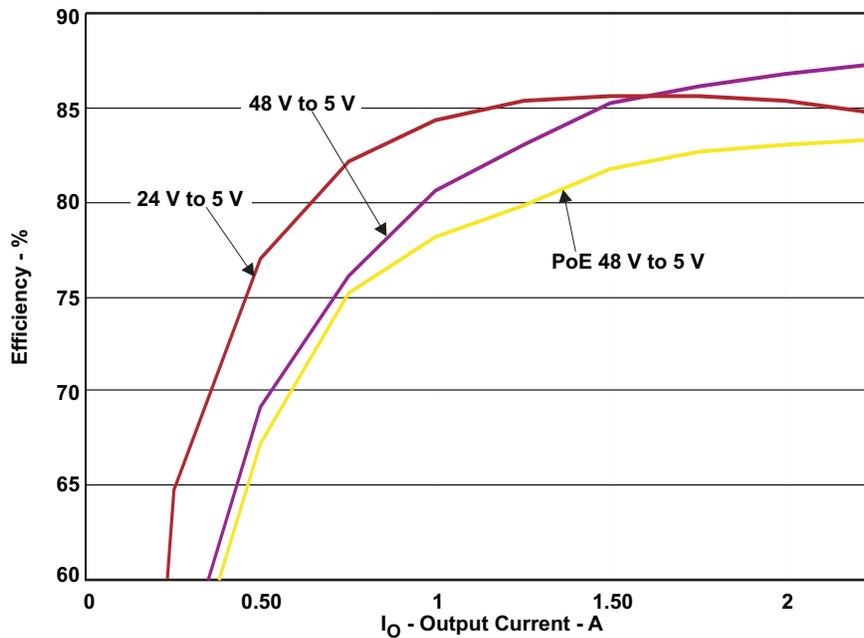


Figure 4. TPS23753EVM-003 Efficiency With 5-V Output

6.3 12-V DC/DC Efficiency

Figure 5 illustrates the efficiency at three different input voltage levels: 1) PoE 48V from J2, 2) 48V RTN-based adapter, and 3) 24V RTN-based adapter.

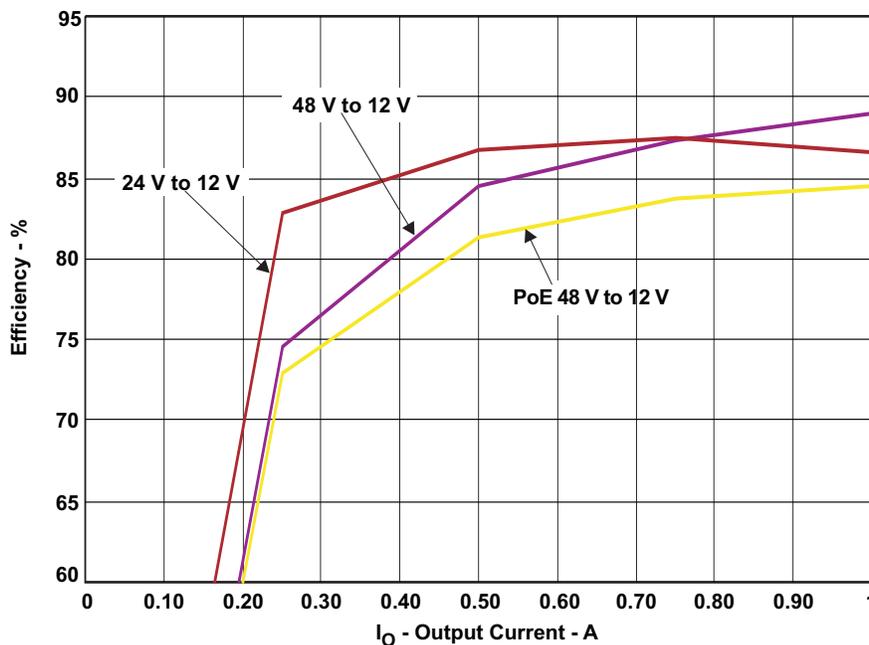


Figure 5. TPS23753EVM-005 Efficiency With 12-V Output

7 EVM Assembly Drawings and Layout Guidelines

7.1 PCB Drawings

Figure 6 shows the component placement and layout.

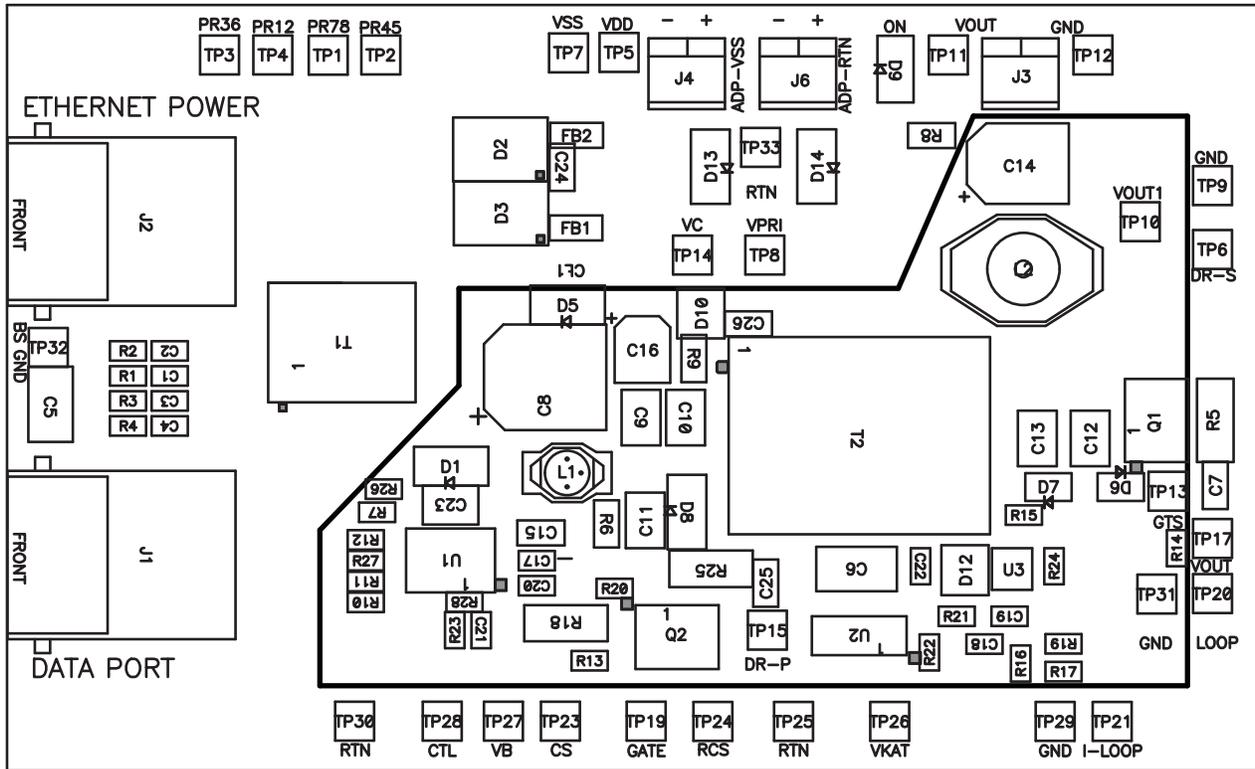


Figure 6. Top Side Placement

8 Bill of Materials
Table 4. TPS23753EVM-003, -004, and -005 Bill of Materials

TPS23753EVM-X			Refdes	Value	Description	Size	Part Number	MFR
Outputs (V)								
12	3.3	5						
Count								
X=005	X=004	X=003						
4	4	4	C1-C4	0.01µF	Capacitor, Ceramic, 100V, X7R, 10%	0603	Std	Std
1	1	1	C11	0.01µF	Capacitor, Ceramic, 100V, X7R, 10%	1210	Std	Std
0	2	2	C12, C13	47µF	Capacitor, Ceramic, 6.3-V, X5R, 20%	1210	C3225X5R0J476M	TD
2	0	0	C12, C13	10µF	Capacitor, Ceramic, 16-V, X5R, 20%	1210	C3225X5R1C106M	TD
0	1	1	C14	330µF	Capacitor, Aluminum, 6.3V, 20%	0.260 × 0.276 in	EEVFK0J331XP	Panasonic
1	0	0	C14	68µF	Capacitor, Aluminum, 16V, 20%	0.217 × 0.169	EEVFK1C680P	Panasonic
1	1	1	C15	0.22µF	Capacitor, Ceramic, 25V, X7R, 10%	0805	Std	Std
1	1	1	C16	10µF	Capacitor, Aluminum, 25V, = 20%	0.200 × 0.210 in	EEVFK1E100R	Panasonic
0	0	0	C17	220pF	Capacitor, Ceramic, 16V, X7R, 10%	0603	Std	Std
0	1	1	C18	100pF	Capacitor, Ceramic, 16V, X7R, 10%	0603	Std	Std
1	0	0	C18	10pF	Capacitor, Ceramic, 16V, X7R, 10%	0603	Std	Std
0	0	1	C19	8.2nF	Capacitor, Ceramic, 16V, X7R, 10%	0603	Std	Std
0	1	0	C19	10nF	Capacitor, Ceramic, 16V, X7R, 10%	0603	Std	Std
1	0	0	C19	6.8nF	Capacitor, Ceramic, 16V, X7R, 10%	0603	Std	Std
2	2	2	C20, C22	0.1µF	Capacitor, Ceramic, 16V, X7R, 10%	0603	Std	Std
0	0	1	C21	22nF	Capacitor, Ceramic, 16V, X7R, 10%	0603	Std	Std
0	1	0	C21	47nF	Capacitor, Ceramic, 16V, X7R, 10%	0603	Std	Std
1	0	0	C21	10nF	Capacitor, Ceramic, 16V, X7R, 10%	0603	Std	Std
1	1	1	C23	0.1µF	Capacitor, Ceramic, 100V, X7R, 10%	1210	Std	Std
2	2	2	C24, C26	1nF	Capacitor, Ceramic, 100V, X7R, 10%	0805	Std	Std
0	0	0	C25	330pF	Capacitor, Ceramic, 200V, X7R, 10%	0805	Std	Std
1	1	1	C5	1000pF	Capacitor, Ceramic, 2kV, X7R 10%	1808	C4520X7R3D102K	TD
1	1	1	C6	2200pF	Capacitor, Ceramic, 2kV, X7R, 20%	1812	C4532X7R3D222K	TD
1	1	1	C7	2200pF	Capacitor, Ceramic, 100V, X7R, 10%	0805	Std	Std
1	1	1	C8	22µF	Capacitor, Aluminum, 100V, 20%	8 × 10.2 mm	EEVFK2A220P	Panasonic
2	2	2	C9, C10	1µF	Capacitor, Ceramic, 100V, X7R, 10%	1210	Std	Std
1	1	1	CL1	NA	Current Loop, 0.025 holes	0.120 × 0.075 in	NA	NA
1	1	1	D1	SMAJ58A	Diode, TVS, 58-V, 1W	SMA	SMAJ58A	Diodes Inc.
1	1	1	D10	BAS16	Diode, Switching, 200mA, 75V, 225mW	SOT-23	BAS16LT1	On Semi
1	1	1	D12	BAV99	Diode, Dual Ultra Fast, Series, 200-mA, 70-V	SOT23	BAV99	Fairchild
2	2	2	D2, D3	HD01-T	Bridge Rectifier, 100V, 0.8A, Glass Passivated, SMD	MINI DIP4	HD01-T	Diodes, Inc
3	3	3	D8, D13, D14	MURA120	Diode, Rectifier, 1A, 200V	SMA	MURA120	On Semi
0	0	0	D5	MURA120	Diode, Rectifier, 1A, 200V	SMA	MURA120	On Semi
2	2	2	D6, D7	BZT52C15S	Diode, Zener, 200mW, 15V	SOD-323	BZT52C15S	Diodes, Inc
2	2	2	FB1, FB2	15-Ω	Bead, Ferrite, SMT, 15-Ω, 1500mA	0805	MMZ2012R150A	TDK
2	2	2	J1, J2	5520252-4	Connector, Jack, Modular, 8 POS	0.705 × 0.820	5520252-4	AMP
3	3	3	J3, J4, J6	ED1514	Terminal Block, 2-pin, 6-A, 3,5mm	0.27 × 0.25	ED1514	OST
1	1	1	L1	10uH	Inductor, SMT, 1.1A, 160mΩ	4.45x6.6mm	DO1608C-103ML_	Coilcraft
1	1	1	L2	1.0uH	Inductor, SMT, 1.0-uH, 6.8-A, 9-mΩ	0.51x0.37	DO3316P-102HCB	Coilcraft
0	1	1	Q1	IRF8113	MOSFET, N-ch, 30-V, 17.2-A, 5.6-mΩ	SO8	IRF8113	IR
1	0	0	Q1	IRF7855	MOSFET, N-ch, 60-V, 12-A, 9.4-mΩ	SO8	IRF7855	IR
1	1	1	Q2	SI4848DY	MOSFET, N-ch, 150-V, 3.7-A, 85-mΩ	SO8	SI4848DY	Vishay
4	4	4	R1-R4	75	Resistor, Chip, 1/16W, 5%	0603	Std	Std
1	1	1	R10	118K	Resistor, Chip, 1/16W,1%	0603	Std	Std
1	1	1	R11	162K	Resistor, Chip, 1/16W,1%	0603	Std	Std
1	1	1	R12	1.27K	Resistor, Chip, 1/16W,1%	0603	Std	Std
1	1	1	R13	24.9	Resistor, Chip, 1/16W, 1%	0603	Std	Std
1	1	1	R16	10K	Resistor, Chip, 1/16W,1%	0603	Std	Std

Table 4. TPS23753EVM-003, -004, and -005 Bill of Materials (continued)

TPS23753EVM-X			Refdes	Value	Description	Size	Part Number	MFR
Outputs (V)								
12	3.3	5						
Count								
X=005	X=004	X=003						
1	1	1	R17	49.9	Resistor, Chip, 1/16W,1%	0603	Std	Std
1	1	1	R18	0.39	Resistor, Chip, 1/2W, 1%	2010	Std	Std
1	1	1	R19	41.2K	Resistor, Chip, 1/16W,1%	0603	Std	Std
2	2	2	R14, R20	0	Resistor, Chip, 1/16W, 1%	0603	Std	Std
0	0	1	R21	21K	Resistor, Chip, 1/16W, 1%	0603	Std	Std
0	1	0	R21	2K	Resistor, Chip, 1/16W, 1%	0603	Std	Std
1	0	0	R21	142K	Resistor, Chip, 1/16W, 1%	0603	Std	Std
0	0	1	R22	1K	Resistor, Chip, 1/16W,1%	0603	Std	Std
0	1	0	R22	422	Resistor, Chip, 1/16W,1%	0603	Std	Std
1	0	0	R22	4.02K	Resistor, Chip, 1/16W,1%	0603	Std	Std
1	1	1	R23	2K	Resistor, Chip, 1/16W,1%	0603	Std	Std
0	0	1	R24	13.3K	Resistor, Chip, 1/16W,1%	0603	Std	Std
0	1	0	R24	24.3K	Resistor, Chip, 1/16W,1%	0603	Std	Std
1	0	0	R24	10.7K	Resistor, Chip, 1/16W,1%	0603	Std	Std
1	1	1	R26	392K	Resistor, Chip, 1/16W, 1%	0603	Std	Std
1	1	1	R27	39.2K	Resistor, Chip, 1/16W, 1%	0603	Std	Std
0	0	1	R28	249	Resistor, Chip, 1/16W, 1%	0603	Std	Std
0	1	0	R28	348	Resistor, Chip, 1/16W, 1%	0603	Std	Std
1	0	0	R28	0	Resistor, Chip, 1/16W, 1%	0603	Std	Std
1	1	1	R15	4.7	Resistor, Chip, 1/16W, 5%	0603	Std	Std
0	0	0	R25	79	Resistor, Chip, 1/2W, 5%	2010	Std	Std
1	1	1	R5	10	Resistor, Chip, 1/2W, 5%	2010	Std	Std
1	1	1	R6	160K	Resistor, Chip, 1/10W, 5%	0805	Std	Std
1	1	1	R7	24.9K	Resistor, Chip, 1/16W,1%	0603	Std	Std
1	1	1	R9	49.9	Resistor, Chip, 1/8-W, 1%	0805	Std	Std
1	1	1	T1	H2019	XFMR, Center-tapped, Voice Over IP	0.500 × 0.370	H2019	Pulse
0	0	1	T2	HA3802-AL or 835-01041FC	Transformer, PoE 13W, Triple Secondary, 150uH, 5V, 2A	0.875 × 0.675	HA3802-AL or 835-01041FC	Coilcraft or E&E Magnetic Products
0	1	0	T2	HA3801-AL or 835-01040FC	Transformer, PoE 13W, Triple Secondary, 165uH, 3.3V, 3A	0.875 × 0.675	HA3801-AL or 835-01040FC	Coilcraft or E&E Magnetic Products
1	0	0	T2	HA3803-AL or 835-01042FC	Transformer, PoE 13W, Triple Secondary, 150uH, 12V, 1A	0.875 × 0.675	HA3803-AL or 835-01042FC	Coilcraft or E&E Magnetic Products
1	1	1	U1	TPS23753PW	IC, IEEE 802.3-2005 Integrated Primary Side Controller	TSSOP14	TPS23753PW	TI
1	1	1	U2	TCMT1107	IC, Photocoupler, 3750VRMS, 80-160% CTR	MF4	TCMT1107	Vishay
0	1	1	U3	TLV431ACDBVR	IC, Shunt Regulator, 1.24-V ref, 6-V, 10-mA, 1%	SOT23-5	TLV431ACDBVR	TI
1	0	0	U3	TL431ACDBVR	IC, Shunt Regulator, 2.49-V ref, 36-V, 10-mA, 1%	SOT23-5	TL431ACDBVR	TI
1	1	1	—	—	PCB, 2.76 In x 4.50 In x 0.062 In	—	HPA305	Any

EVALUATION BOARD/KIT IMPORTANT NOTICE

Texas Instruments (TI) provides the enclosed product(s) under the following conditions:

This evaluation board/kit is intended for use for **ENGINEERING DEVELOPMENT, DEMONSTRATION, OR EVALUATION PURPOSES ONLY** and is not considered by TI to be a finished end-product fit for general consumer use. Persons handling the product(s) must have electronics training and observe good engineering practice standards. As such, the goods being provided are not intended to be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including product safety and environmental measures typically found in end products that incorporate such semiconductor components or circuit boards. This evaluation board/kit does not fall within the scope of the European Union directives regarding electromagnetic compatibility, restricted substances (RoHS), recycling (WEEE), FCC, CE or UL, and therefore may not meet the technical requirements of these directives or other related directives.

Should this evaluation board/kit not meet the specifications indicated in the User's Guide, the board/kit may be returned within 30 days from the date of delivery for a full refund. **THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE.**

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user indemnifies TI from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge.

EXCEPT TO THE EXTENT OF THE INDEMNITY SET FORTH ABOVE, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.

TI currently deals with a variety of customers for products, and therefore our arrangement with the user **is not exclusive.**

TI assumes **no liability for applications assistance, customer product design, software performance, or infringement of patents or services described herein.**

Please read the User's Guide and, specifically, the Warnings and Restrictions notice in the User's Guide prior to handling the product. This notice contains important safety information about temperatures and voltages. For additional information on TI's environmental and/or safety programs, please contact the TI application engineer or visit www.ti.com/esh.

No license is granted under any patent right or other intellectual property right of TI covering or relating to any machine, process, or combination in which such TI products or services might be or are used.

FCC Warning

This evaluation board/kit is intended for use for **ENGINEERING DEVELOPMENT, DEMONSTRATION, OR EVALUATION PURPOSES ONLY** and is not considered by TI to be a finished end-product fit for general consumer use. It generates, uses, and can radiate radio frequency energy and has not been tested for compliance with the limits of computing devices pursuant to part 15 of FCC rules, which are designed to provide reasonable protection against radio frequency interference. Operation of this equipment in other environments may cause interference with radio communications, in which case the user at his own expense will be required to take whatever measures may be required to correct this interference.

EVM WARNINGS AND RESTRICTIONS

It is important to operate this EVM within the input voltage range of 0 V to 57 V and the output voltage range of 3 V to 15 V.

Exceeding the specified input range may cause unexpected operation and/or irreversible damage to the EVM. If there are questions concerning the input range, please contact a TI field representative prior to connecting the input power.

Applying loads outside of the specified output range may result in unintended operation and/or possible permanent damage to the EVM. Please consult the EVM User's Guide prior to connecting any load to the EVM output. If there is uncertainty as to the load specification, please contact a TI field representative.

During normal operation, some circuit components may have case temperatures greater than 80°C. The EVM is designed to operate properly with certain components above 80°C as long as the input and output ranges are maintained. These components include but are not limited to linear regulators, switching transistors, pass transistors, and current sense resistors. These types of devices can be identified using the EVM schematic located in the EVM User's Guide. When placing measurement probes near these devices during operation, please be aware that these devices may be very warm to the touch.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2008, Texas Instruments Incorporated

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
RF/IF and ZigBee® Solutions	www.ti.com/lprf

Applications

Audio	www.ti.com/audio
Automotive	www.ti.com/automotive
Broadband	www.ti.com/broadband
Digital Control	www.ti.com/digitalcontrol
Medical	www.ti.com/medical
Military	www.ti.com/military
Optical Networking	www.ti.com/opticalnetwork
Security	www.ti.com/security
Telephony	www.ti.com/telephony
Video & Imaging	www.ti.com/video
Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2008, Texas Instruments Incorporated