

LM4883 Boomer® Audio Power Amplifier Series Dual 2.1W Audio Amplifier Plus Stereo Headphone Function

Check for Samples: [LM4883](#)

FEATURES

- Input Mux Control and Two Separate Inputs per Channel
- Stereo Headphone Amplifier Mode
- Improved “Click and Pop” Suppression Circuitry
- Thermal Shutdown Protection Circuitry
- PCB Area-Saving NHZ0024B Package

APPLICATIONS

- Multimedia Monitors
- Portable and Desktop Computers
- Portable Audio Systems

KEY SPECIFICATIONS

- PO at 1% THD+N
 - RL = 3Ω, 2.4W (Typ)
 - RL = 4Ω, 2.1W (Typ)
 - RL = 8Ω, 1.3W (Typ)
- Single-Ended Mode THD+N at 75mW into 32Ω (5V, 1kHz)
- Shutdown Current, 0.04μA (Typ)
- Supply Voltage Range, 2.4V to 5.5V
- PSRR at 217Hz, 85dB (Typ)

DESCRIPTION

The LM4883 is a dual bridge-connected audio power amplifier which, when connected to a 5V supply, will deliver 2.1W to a 4Ω load ⁽¹⁾ or 2.4W to a 3Ω load ⁽²⁾ with less than 1.0% THD+N. In addition, the headphone input pin allows the amplifiers to operate in single-ended mode when driving stereo headphones. A MUX control pin allows selection between the two stereo sets of amplifier inputs. The MUX control can also be used to select two different closed-loop responses.

Boomer audio power amplifiers were designed specifically to provide high quality output power from a surface mount package while requiring few external components. To simplify audio system design, the LM4883SQ combines dual bridge speaker amplifiers and stereo headphone amplifiers on one chip.

The LM4883SQ features an internally controlled, low-power consumption shutdown mode, a stereo headphone amplifier mode, and thermal shutdown protection. It also utilizes circuitry to reduce “clicks and pops” during device turn-on.


- (1) An LM4883SQ that has been properly mounted to a circuit board will deliver 2.1W into 4Ω. See the Application Information sections for further information concerning the LM4883SQ.
- (2) An LM4883SQ that has been properly mounted to a circuit board and forced-air cooled will deliver 2.4W into 3Ω.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

All trademarks are the property of their respective owners.

Connection Diagram

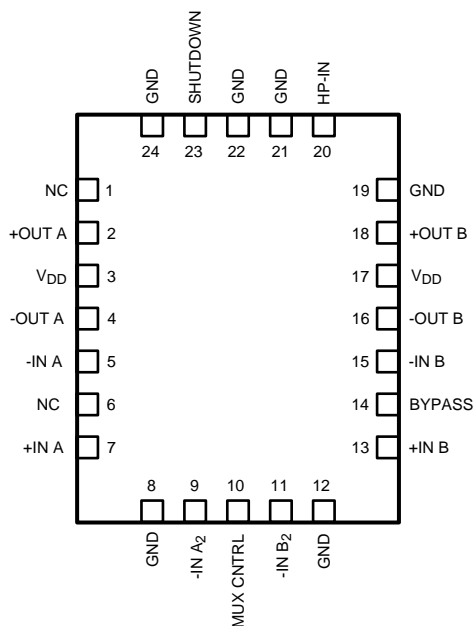

**Figure 1. LM4883SQ
Top View
See Package Number NHZ0024B**

Typical Application

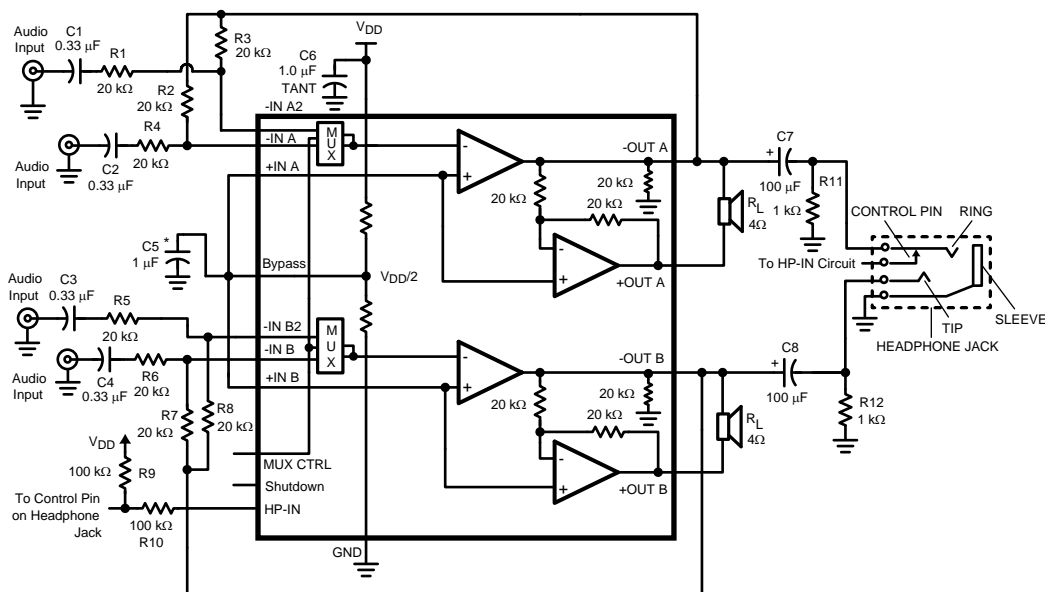


Figure 2. Typical Audio Amplifier Application Circuit

Table 1. External Components Description (see Figure 2)

| Components | | Functional Description |
|------------|-------------|--|
| 1. | R1, 4, 5, 6 | The inverting input resistance R1, along with R3, set the closed-loop gain. R1, along with C1, form a high pass filter with $f_c = 1/(2\pi R_1 C_1)$. |
| 2. | C1, 2, 3, 4 | The input coupling capacitor blocks DC voltage at the amplifier's input terminals. C1, along with R1, create a highpass filter with $f_c = 1/(2\pi R_1 C_1)$. Refer to the section, SELECTING PROPER EXTERNAL COMPONENTS , for an explanation of determining the value of C1. |
| 3. | R2, 3, 7, 8 | The feedback resistance, along with R1 sets the closed-loop gain. |
| 4. | C6 | The supply bypass capacitor. Refer to the POWER SUPPLY BYPASSING section for information about properly placing, and selecting the value of, this capacitor. |
| 5. | C5 | The capacitor, C5, filters the half-supply voltage present on the BYPASS pin. Refer to the SELECTING PROPER EXTERNAL COMPONENTS section for information concerning proper placement and selecting C5's value. |



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

Absolute Maximum Ratings⁽¹⁾⁽²⁾

| | | |
|---|------------------------------|--------------------------------|
| Supply Voltage | | 6.0V |
| Storage Temperature | | –65°C to +150°C |
| Input Voltage | | –0.3V to V _{DD} +0.3V |
| Power Dissipation ⁽³⁾ | | Internally limited |
| ESD Susceptibility ⁽⁴⁾ | | 2000V |
| ESD Susceptibility ⁽⁵⁾ | | 200V |
| Junction Temperature | | 150°C |
| Solder Information Small Outline Package | Vapor Phase (60 sec.) | 215°C |
| | Infrared (15 sec.) | 220°C |
| Thermal Resistance | θ_{JC} (typ)—NHZ0024B | 3°C/W |
| | θ_{JA} (typ)—NHZ0024B | 42°C/W |

- (1) Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is functional, but do not guarantee specific performance limits. Electrical Characteristics state DC and AC electrical specifications under particular test conditions which guarantee specific performance limits. This assumes that the device operates within the Operating Ratings. Specifications are not guaranteed for parameters where no limit is given. The typical value however, is a good indication of device performance.
- (2) If Military/Aerospace specified devices are required, please contact the Texas Instruments Sales Office/Distributors for availability and specifications.
- (3) The maximum power dissipation must be derated at elevated temperatures and is dictated by T_{JMAX}, θ_{JA} , and the ambient temperature T_A. The maximum allowable power dissipation is P_{DMAX} = (T_{JMAX} – T_A)/ θ_{JA} . For the LM4883SQ, T_{JMAX} = 150°C.
- (4) Human body model, 100 pF discharged through a 1.5 k Ω resistor.
- (5) Machine model, 220 pF–240 pF discharged through all pins.

Operating Ratings

| | | |
|--|--|-------------------------------|
| Temperature Range | | |
| T _{MIN} ≤ T _A ≤ T _{MAX} | | –40°C ≤ T _A ≤ 85°C |
| Supply Voltage | | 2.4V ≤ V _{DD} ≤ 5.5V |

Electrical Characteristics (5V)⁽¹⁾⁽²⁾⁽³⁾

The following specifications apply for $V_{DD} = 5V$ unless otherwise noted. Limits apply for $T_A = 25^\circ C$.

| Symbol | Parameter | Conditions | LM4883 | | Units (Limits) |
|------------|--------------------------------|---|------------------------|----------------------|----------------|
| | | | Typical ⁽⁴⁾ | Limit ⁽⁵⁾ | |
| V_{DD} | Supply Voltage | | | 2.4 | V (min) |
| | | | | 5.5 | V (max) |
| I_{DD} | Quiescent Power Supply Current | $V_{IN} = 0V$, $I_O = 0A^{(6)}$, HP-IN = 0V | 6 | 10 | mA (max) |
| | | $V_{IN} = 0V$, $I_O = 0A^{(6)}$, HP-IN = 4V | 3.0 | 6 | mA (min) |
| I_{SD} | Shutdown Current | V_{DD} applied to the SHUTDOWN pin | 0.04 | 2 | μA (max) |
| V_{IH} | Headphone High Input Voltage | | 3.7 | 4 | V (min) |
| V_{IL} | Headphone Low Input Voltage | | 2.6 | 0.8 | V (max) |
| V_{IHSD} | Shutdown High Input Voltage | | | $0.7V_{DD}$ | V (min) |
| V_{ILSD} | Shutdown Low Input Voltage | | | $0.3V_{DD}$ | V (max) |
| T_{WU} | Turn On Time | 1 μF Bypass Cap (C5) | 140 | | ms |

- (1) Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is functional, but do not guarantee specific performance limits. Electrical Characteristics state DC and AC electrical specifications under particular test conditions which guarantee specific performance limits. This assumes that the device operates within the Operating Ratings. Specifications are not guaranteed for parameters where no limit is given. The typical value however, is a good indication of device performance.
- (2) All voltages are measured with respect to the ground (GND) pins, unless otherwise specified.
- (3) All measurements taken from Applications Diagram (Figure 44).
- (4) Typicals are specified at $25^\circ C$ and represent the parametric norm.
- (5) Datasheet min/max specification limits are guaranteed by design, test, or statistical analysis.
- (6) The quiescent power supply current depends on the offset voltage when a practical load is connected to the amplifier.

Electrical Characteristics for Bridged-Mode Operation (5V)⁽¹⁾⁽²⁾⁽³⁾

The following specifications apply for $V_{DD} = 5V$ unless otherwise specified. Limits apply for $T_A = 25^\circ C$.

| Symbol | Parameter | Conditions | LM4883 | | Units (Limits) |
|------------|---------------------------------|---|------------------------|----------------------|----------------|
| | | | Typical ⁽⁴⁾ | Limit ⁽⁵⁾ | |
| V_{OS} | Output Offset Voltage | $V_{IN} = 0V$ | 5 | 45 | mV (max) |
| P_O | Output Power ⁽⁶⁾ | THD+N = 1%, $f = 1kHz$ ⁽⁷⁾ | | | |
| | | LM4883SQ, $R_L = 3\Omega$ | 2.4 | | W |
| | | LM4883SQ, $R_L = 4\Omega$ | 2.1 | | W |
| | | LM4883SQ, $R_L = 8\Omega$ | 1.3 | 1.0 | W (min) |
| | | THD+N = 10%, $f = 1kHz$ ⁽⁷⁾ | | | |
| | | LM4883SQ, $R_L = 3\Omega$ | 3.0 | | W |
| | | LM4883SQ, $R_L = 4\Omega$ | 2.5 | | W |
| | | LM4883SQ, $R_L = 8\Omega$ | 1.7 | | W |
| THD+N | Total Harmonic Distortion+Noise | 1kHz, $A_{VD} = 2$ | | | |
| | | LM4883SQ, $R_L = 4\Omega$, $P_O = 1W$ | 0.10 | | % |
| | | LM4883SQ, $R_L = 8\Omega$, $P_O = .4W$ | 0.06 | | % |
| PSRR | Power Supply Rejection Ratio | Input Floating, 217Hz $V_{ripple} = 200mV_{p-p}$ $C_B = 1\mu F$, $R_L = 8\Omega$ | 85 | | dB |
| | | Input Floating, 1kHz $V_{ripple} = 200mV_{p-p}$ $C_B = 1\mu F$, $R_L = 8\Omega$ | 80 | | dB |
| | | Input grounded, 217Hz $V_{ripple} = 200mV_{p-p}$ $C_B = 1\mu F$, $R_L = 8\Omega$ | 65 | | dB |
| | | Input grounded, 1kHz $V_{ripple} = 200mV_{p-p}$ $C_B = 1\mu F$, $R_L = 8\Omega$ | 70 | | dB |
| X_{TALK} | Channel Separation | $f = 1kHz$, $C_B = 1.0\mu F$ | 82 | | dB |
| V_{NO} | Output Noise Voltage | 1kHz, A-weighted | 21 | | μV |

- (1) Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is functional, but do not guarantee specific performance limits. Electrical Characteristics state DC and AC electrical specifications under particular test conditions which guarantee specific performance limits. This assumes that the device operates within the Operating Ratings. Specifications are not guaranteed for parameters where no limit is given. The typical value however, is a good indication of device performance.
- (2) All voltages are measured with respect to the ground (GND) pins, unless otherwise specified.
- (3) All measurements taken from Applications Diagram (Figure 44).
- (4) Typicals are specified at $25^\circ C$ and represent the parametric norm.
- (5) Datasheet min/max specification limits are guaranteed by design, test, or statistical analysis.
- (6) Output power is measured at the device terminals.
- (7) When driving 3Ω or 4Ω loads and operating on a 5V supply, the LM4883SQ must be mounted to a circuit board that has a minimum of $2.5in^2$ of exposed, uninterrupted copper area connected to the SQ package's exposed DAP.

Electrical Characteristics for Single-Ended Operation (5V)^{(1)(2) (3)}

The following specifications apply for $V_{DD} = 5V$ unless otherwise specified. Limits apply for $T_A = 25^\circ C$.

| Symbol | Parameter | Conditions | LM4883 | | Units (Limits) |
|-------------------|---------------------------------|--|------------------------|----------------------|----------------|
| | | | Typical ⁽⁴⁾ | Limit ⁽⁵⁾ | |
| P_O | Output Power | THD+N = 0.5%, $f = 1\text{ kHz}$, $R_L = 32\Omega$ | 90 | 75 | mW (min) |
| | | THD+N = 1%, $f = 1\text{ kHz}$, $R_L = 8\Omega$ | 325 | | mW |
| | | THD+N = 10%, $f = 1\text{ kHz}$, $R_L = 8\Omega$ | 400 | | mW |
| THD+N | Total Harmonic Distortion+Noise | $P_O = 20\text{mW}$, 1 kHz , $R_L = 32\Omega$ | 0.015 | | % |
| PSRR | Power Supply Rejection Ratio | Input Floating, 217Hz $V_{\text{ripple}} = 200\text{mV}_{\text{p-p}}$ $C_B = 1\mu\text{F}$, $R_L = 8\Omega$ | 70 | | dB |
| | | Input Floating, 1kHz $V_{\text{ripple}} = 200\text{mV}_{\text{p-p}}$ $C_B = 1\mu\text{F}$, $R_L = 8\Omega$ | 72 | | dB |
| | | Input grounded, 217Hz $V_{\text{ripple}} = 200\text{mV}_{\text{p-p}}$ $C_B = 1\mu\text{F}$, $R_L = 8\Omega$ | 65 | | dB |
| | | Input grounded, 1kHz $V_{\text{ripple}} = 200\text{mV}_{\text{p-p}}$ $C_B = 1\mu\text{F}$, $R_L = 8\Omega$ | 70 | | dB |
| X_{TALK} | Channel Separation | $f = 1\text{ kHz}$, $C_B = 1.0\mu\text{F}$ | 80 | | dB |
| V_{NO} | Output Noise Voltage | 1kHz, A-weighted | 11 | | μV |

- (1) Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is functional, but do not guarantee specific performance limits. Electrical Characteristics state DC and AC electrical specifications under particular test conditions which guarantee specific performance limits. This assumes that the device operates within the Operating Ratings. Specifications are not guaranteed for parameters where no limit is given. The typical value however, is a good indication of device performance.
- (2) All voltages are measured with respect to the ground (GND) pins, unless otherwise specified.
- (3) All measurements taken from Applications Diagram (Figure 44).
- (4) Typicals are specified at $25^\circ C$ and represent the parametric norm.
- (5) Datasheet min/max specification limits are guaranteed by design, test, or statistical analysis.

Electrical Characteristics (3V)^{(1)(2) (3)}

The following specifications apply for $V_{DD} = 3V$ unless otherwise noted. Limits apply for $T_A = 25^\circ C$.

| Symbol | Parameter | Conditions | LM4883 | | Units (Limits) |
|------------|--------------------------------|---|------------------------|----------------------|----------------|
| | | | Typical ⁽⁴⁾ | Limit ⁽⁵⁾ | |
| I_{DD} | Quiescent Power Supply Current | $V_{IN} = 0V, I_O = 0A^{(6)}, HP-IN = 0V$ | 4.5 | | mA |
| | | $V_{IN} = 0V, I_O = 0A^{(6)}, HP-IN = 4V$ | 2.5 | | mA |
| I_{SD} | Shutdown Current | V_{DD} applied to the SHUTDOWN pin | 0.01 | | μA |
| V_{IH} | Headphone High Input Voltage | | 2.2 | | V |
| V_{IL} | Headphone Low Input Voltage | | 1.5 | | V |
| V_{IHSD} | Shutdown High Input Voltage | | | $0.7V_{DD}$ | V (min) |
| V_{ILSD} | Shutdown Low Input Voltage | | | $0.3V_{DD}$ | V (max) |
| T_{WU} | Turn On Time | 1 μF Bypass Cap (C5) | 140 | | ms |

- (1) Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is functional, but do not guarantee specific performance limits. Electrical Characteristics state DC and AC electrical specifications under particular test conditions which guarantee specific performance limits. This assumes that the device operates within the Operating Ratings. Specifications are not guaranteed for parameters where no limit is given. The typical value however, is a good indication of device performance.
- (2) All voltages are measured with respect to the ground (GND) pins, unless otherwise specified.
- (3) All measurements taken from Applications Diagram (Figure 44).
- (4) Typicals are specified at $25^\circ C$ and represent the parametric norm.
- (5) Datasheet min/max specification limits are guaranteed by design, test, or statistical analysis.
- (6) The quiescent power supply current depends on the offset voltage when a practical load is connected to the amplifier.

Electrical Characteristics for Bridged-Mode Operation (3V)^{(1)(2) (3)}

The following specifications apply for $V_{DD} = 3V$ unless otherwise specified. Limits apply for $T_A = 25^\circ C$.

| Symbol | Parameter | Conditions | LM4883 | | Units (Limits) |
|------------|---------------------------------|---|------------------------|----------------------|-------------------|
| | | | Typical ⁽⁴⁾ | Limit ⁽⁵⁾ | |
| V_{OS} | Output Offset Voltage | $V_{IN} = 0V$ | 5 | | mV |
| P_O | Output Power ⁽⁶⁾ | THD+N = 1%, $f = 1kHz$ ⁽⁷⁾ | | | |
| | | LM4883SQ, $R_L = 3\Omega$ | .82 | | W |
| | | LM4883SQ, $R_L = 4\Omega$ | .70 | | W |
| | | LM4883SQ, $R_L = 8\Omega$ | .43 | | W |
| | | THD+N = 10%, $f = 1kHz$ ⁽⁷⁾ | | | |
| | | LM4883SQ, $R_L = 3\Omega$ | 1.0 | | W |
| | | LM4883SQ, $R_L = 4\Omega$ | .85 | | W |
| | | LM4883SQ, $R_L = 8\Omega$ | .53 | | W |
| THD+N | Total Harmonic Distortion+Noise | 1kHz | | | |
| | | LM4883SQ, $R_L = 4\Omega$, $P_O = 280mW$ | 0.1 | | % |
| | | LM4883SQ, $R_L = 8\Omega$, $P_O = 200mW$ | 0.05 | | % |
| PSRR | Power Supply Rejection Ratio | Input Floating, 217Hz $V_{ripple} = 200mV_{p-p}$ $C_B = 1\mu F$, $R_L = 8\Omega$ | 90 | | dB |
| | | Input Floating, 1kHz $V_{ripple} = 200mV_{p-p}$ $C_B = 1\mu F$, $R_L = 8\Omega$ | 80 | | dB |
| | | Input grounded, 217Hz $V_{ripple} = 200mV_{p-p}$ $C_B = 1\mu F$, $R_L = 8\Omega$ | 65 | | dB |
| | | Input grounded, 1kHz $V_{ripple} = 200mV_{p-p}$ $C_B = 1\mu F$, $R_L = 8\Omega$ | 73 | | dB |
| X_{TALK} | Channel Separation | $f = 1kHz$, $C_B = 1.0\mu F$ | 85 | | dB |
| V_{NO} | Output Noise Voltage | 1kHz, A-weighted | 21 | | μV |

- (1) Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is functional, but do not guarantee specific performance limits. Electrical Characteristics state DC and AC electrical specifications under particular test conditions which guarantee specific performance limits. This assumes that the device operates within the Operating Ratings. Specifications are not guaranteed for parameters where no limit is given. The typical value however, is a good indication of device performance.
- (2) All voltages are measured with respect to the ground (GND) pins, unless otherwise specified.
- (3) All measurements taken from Applications Diagram (Figure 44).
- (4) Typicals are specified at $25^\circ C$ and represent the parametric norm.
- (5) Datasheet min/max specification limits are guaranteed by design, test, or statistical analysis.
- (6) Output power is measured at the device terminals.
- (7) When driving 3Ω or 4Ω loads and operating on a 5V supply, the LM4883SQ must be mounted to a circuit board that has a minimum of $2.5in^2$ of exposed, uninterrupted copper area connected to the SQ package's exposed DAP.

Electrical Characteristics for Single-Ended Operation (3V)^{(1)(2) (3)}

The following specifications apply for $V_{DD} = 3V$ unless otherwise specified. Limits apply for $T_A = 25^\circ C$.

| Symbol | Parameter | Conditions | LM4883 | | Units (Limits) |
|-------------------|---------------------------------|---|------------------------|----------------------|-------------------|
| | | | Typical ⁽⁴⁾ | Limit ⁽⁵⁾ | |
| P_O | Output Power | THD+N = 0.5%, $f = 1\text{ kHz}$, $R_L = 32\Omega$ | 35 | | mW |
| | | THD+N = 1%, $f = 1\text{ kHz}$, $R_L = 8\Omega$ | 125 | | mW |
| | | THD+N = 10%, $f = 1\text{ kHz}$, $R_L = 8\Omega$ | 150 | | mW |
| THD+N | Total Harmonic Distortion+Noise | $P_O = 35\text{mW}$, $20\text{Hz} \leq f \leq 20\text{kHz}$, $R_L = 32\Omega$ | .015 | | % |
| PSRR | Power Supply Rejection Ratio | Input Floating, 217Hz $V_{\text{ripple}} = 200\text{mV}_{\text{p-p}}$ $C_B = 1\mu\text{F}$, $R_L = 8\Omega$ | 71 | | dB |
| | | Input Floating, 1kHz $V_{\text{ripple}} = 200\text{mV}_{\text{p-p}}$ $C_B = 1\mu\text{F}$, $R_L = 8\Omega$ | 79 | | dB |
| | | Input grounded, 217Hz $V_{\text{ripple}} = 200\text{mV}_{\text{p-p}}$ $C_B = 1\mu\text{F}$, $R_L = 32\Omega$ | 65 | | dB |
| | | Input grounded, 1kHz $V_{\text{ripple}} = 200\text{mV}_{\text{p-p}}$ $C_B = 1\mu\text{F}$, $R_L = 32\Omega$ | 72 | | dB |
| X_{TALK} | Channel Separation | $f = 1\text{kHz}$, $C_B = 1.0\mu\text{F}$ | 80 | | dB |
| V_{NO} | Output Noise Voltage | 1kHz, A-weighted | 11 | | μV |

- (1) Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is functional, but do not guarantee specific performance limits. Electrical Characteristics state DC and AC electrical specifications under particular test conditions which guarantee specific performance limits. This assumes that the device operates within the Operating Ratings. Specifications are not guaranteed for parameters where no limit is given. The typical value however, is a good indication of device performance.
- (2) All voltages are measured with respect to the ground (GND) pins, unless otherwise specified.
- (3) All measurements taken from Applications Diagram (Figure 44).
- (4) Typicals are specified at $25^\circ C$ and represent the parametric norm.
- (5) Datasheet min/max specification limits are guaranteed by design, test, or statistical analysis.

Typical Performance Characteristics

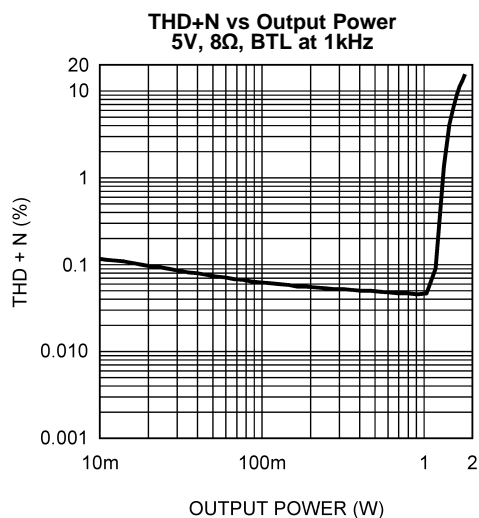


Figure 3.

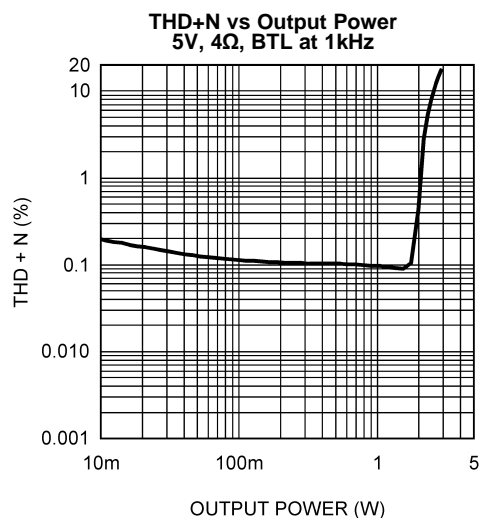


Figure 4.

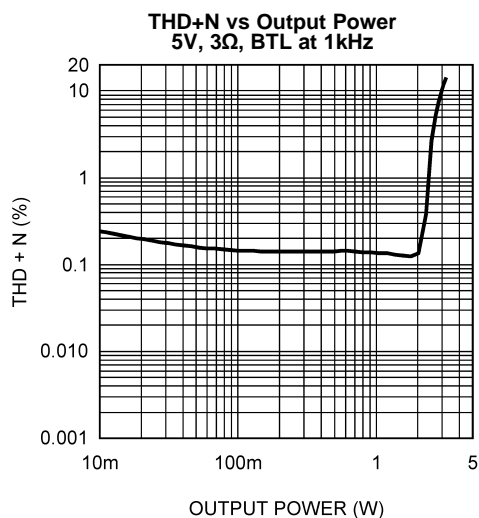


Figure 5.

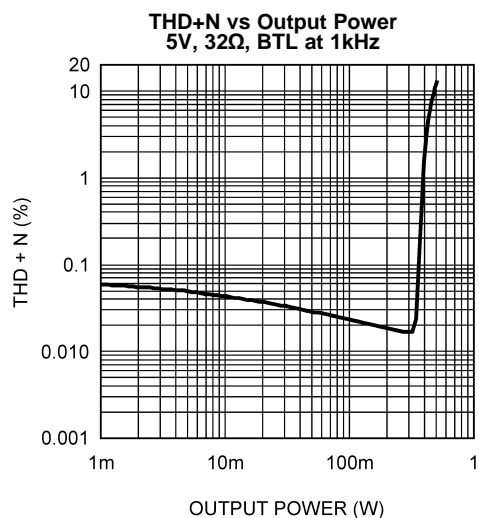


Figure 6.

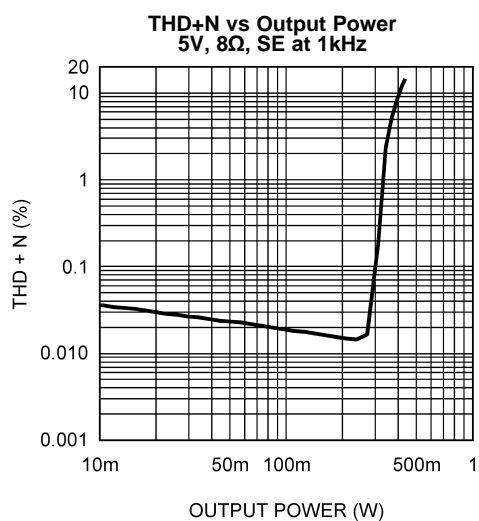


Figure 7.

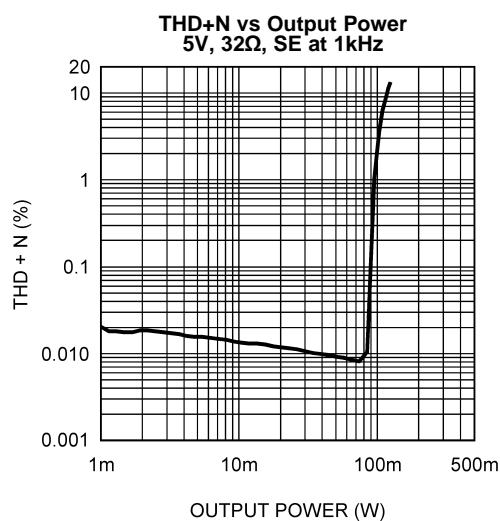


Figure 8.

Typical Performance Characteristics (continued)

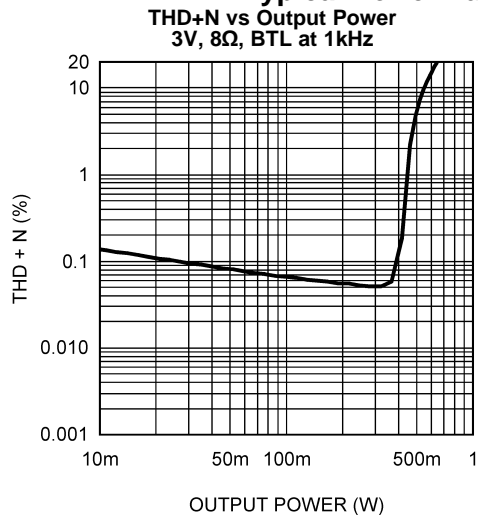


Figure 9.

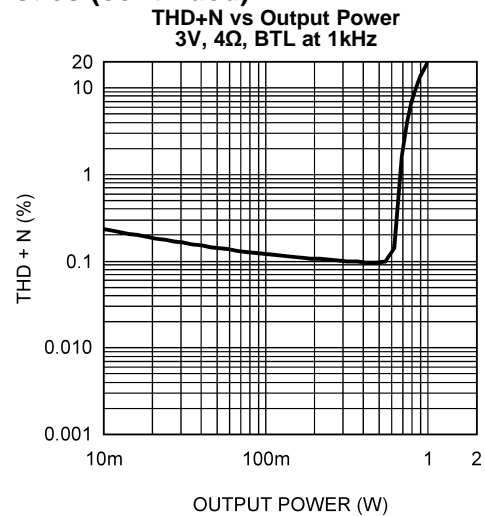


Figure 10.

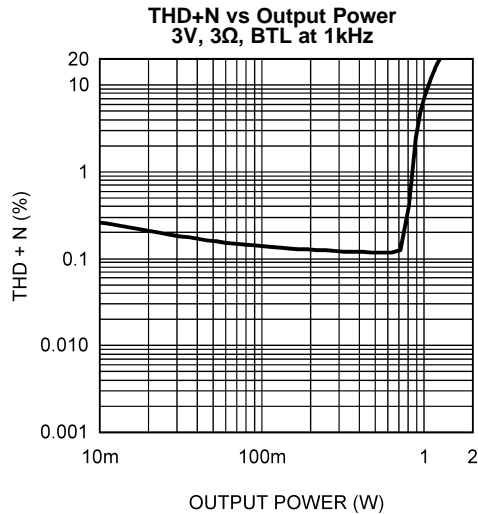


Figure 11.

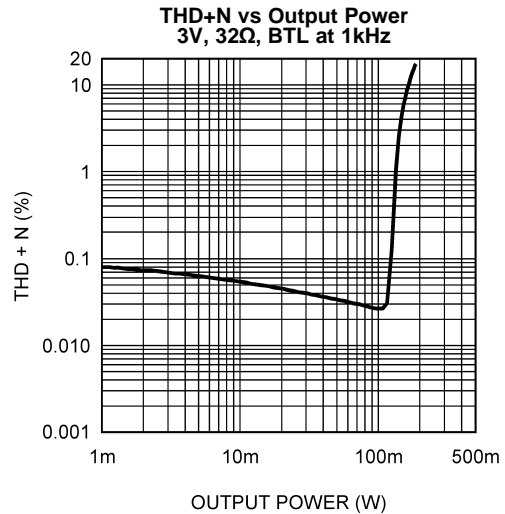


Figure 12.

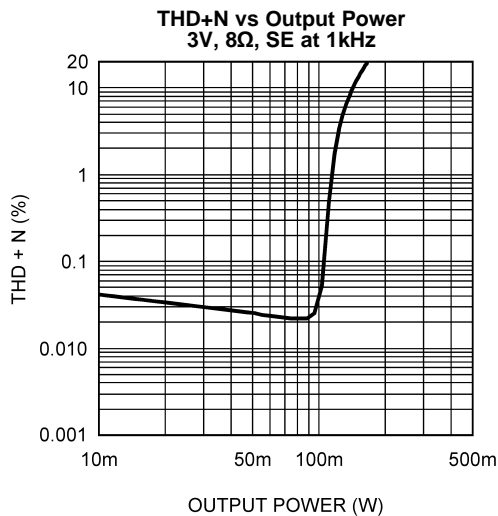


Figure 13.

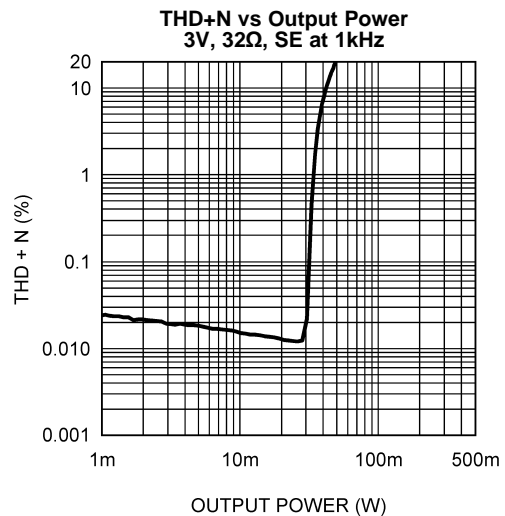


Figure 14.

Typical Performance Characteristics (continued)

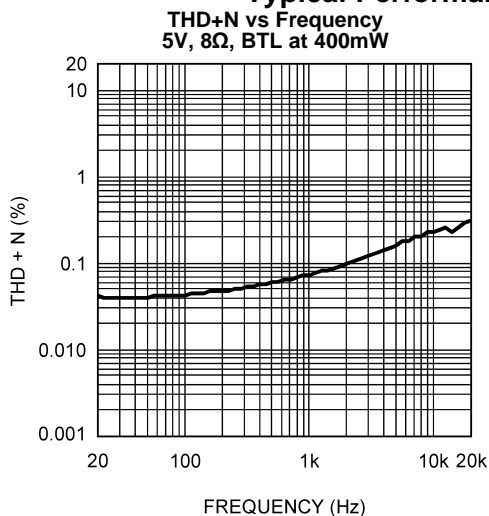


Figure 15.

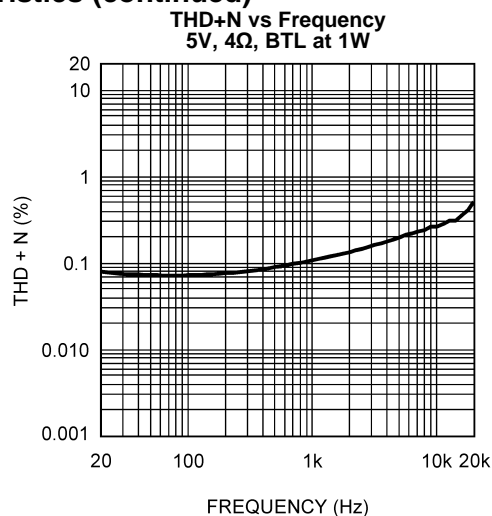


Figure 16.

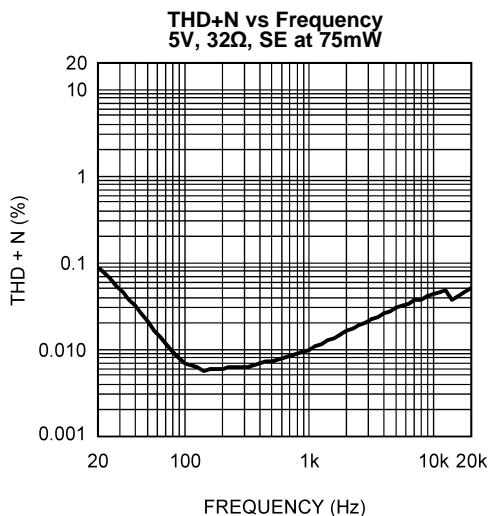


Figure 17.

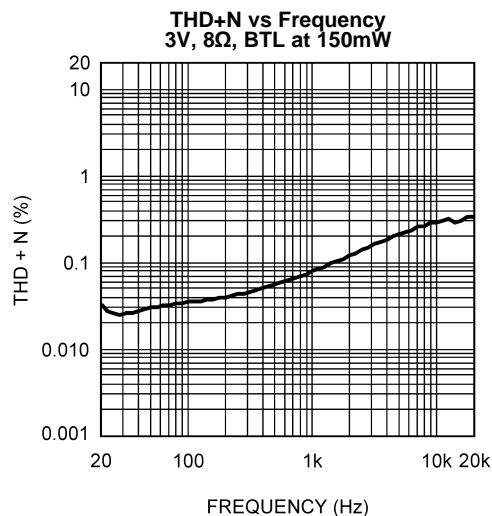


Figure 18.

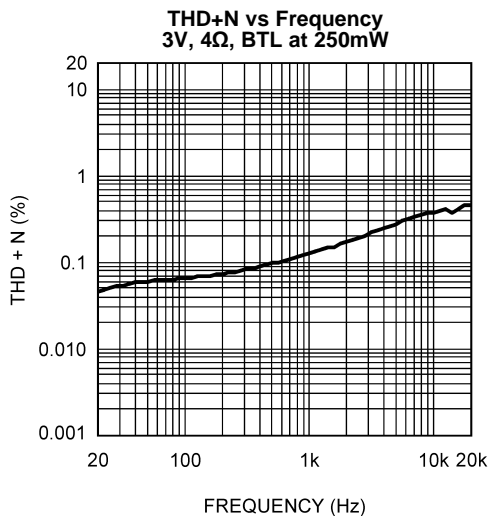


Figure 19.

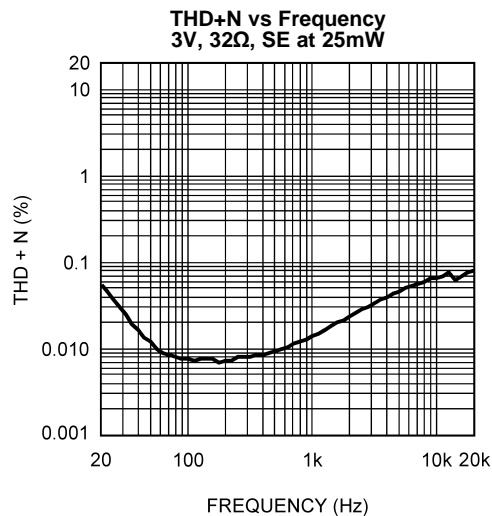


Figure 20.

Typical Performance Characteristics (continued)

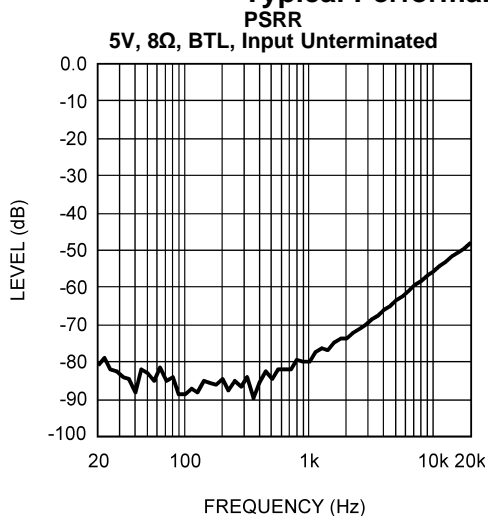


Figure 21.

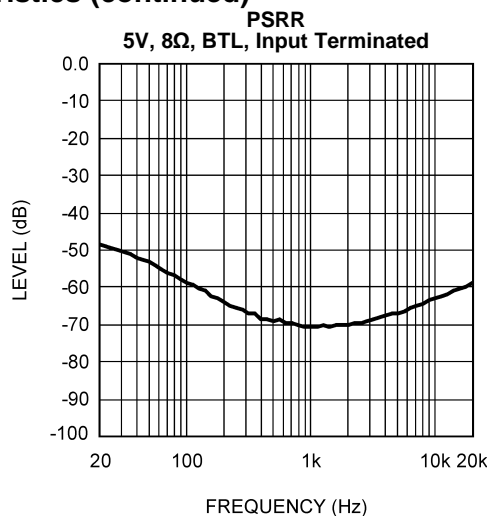


Figure 22.

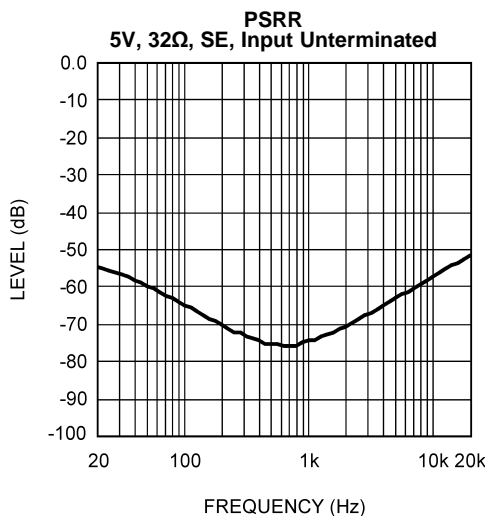


Figure 23.

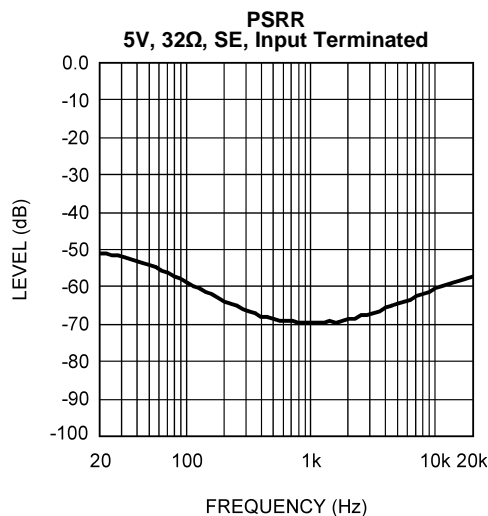


Figure 24.

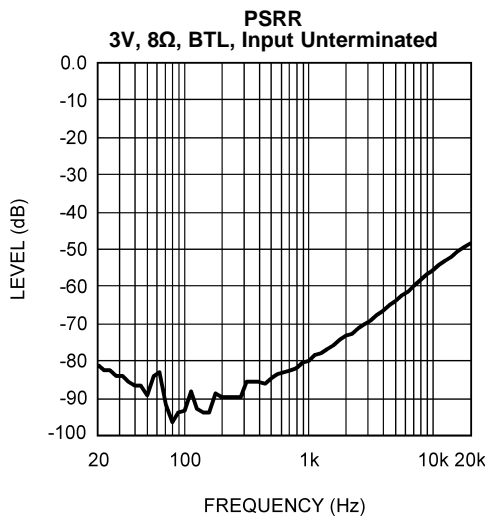


Figure 25.

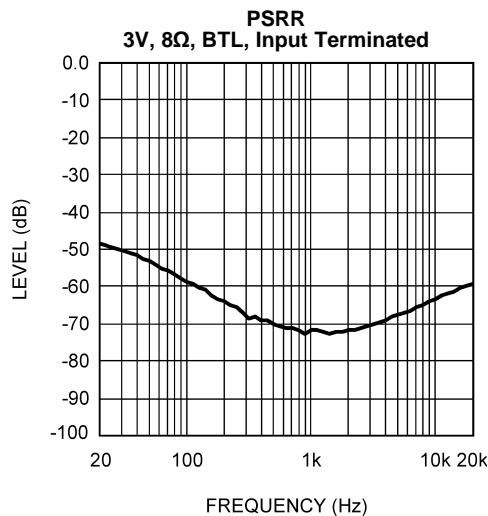


Figure 26.

Typical Performance Characteristics (continued)

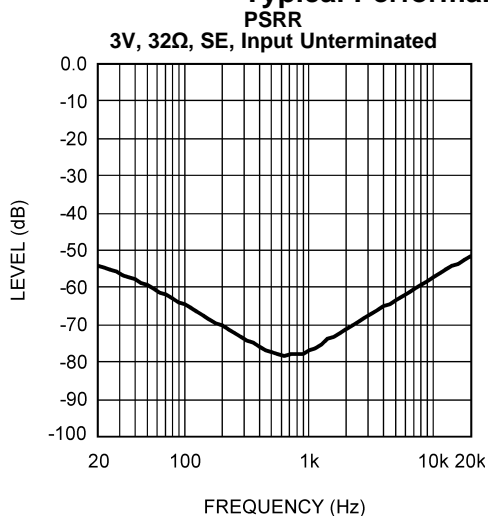


Figure 27.

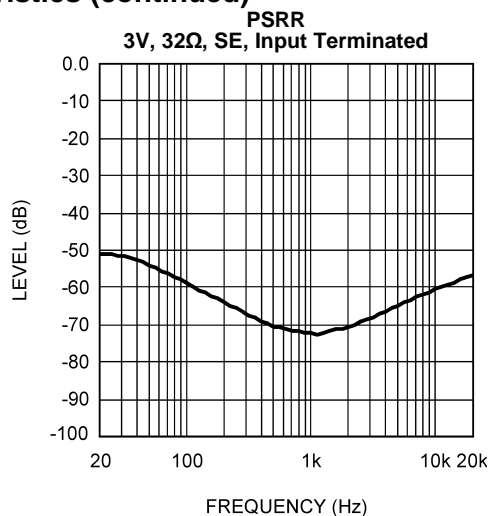


Figure 28.

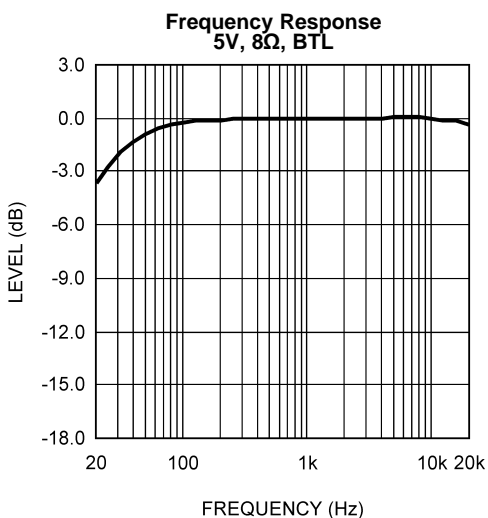


Figure 29.

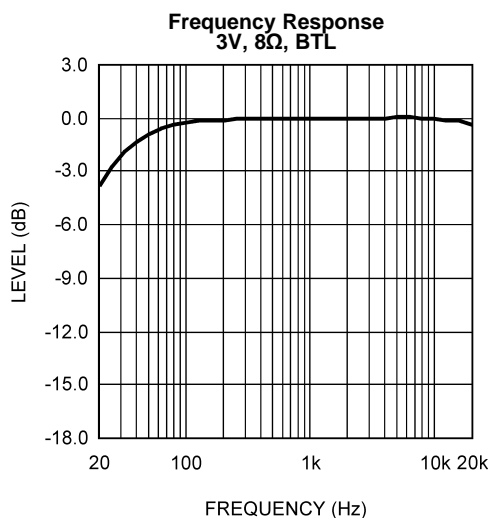


Figure 30.

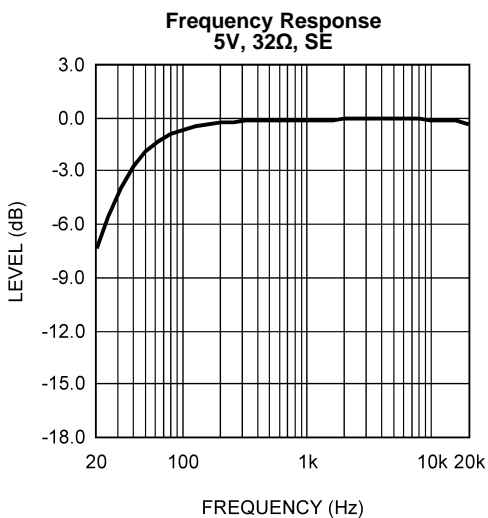


Figure 31.

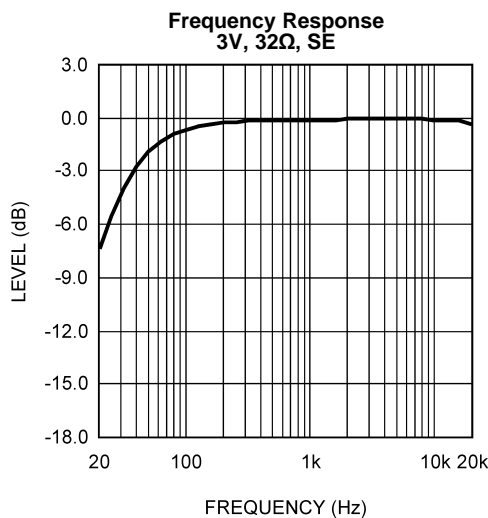


Figure 32.

Typical Performance Characteristics (continued)

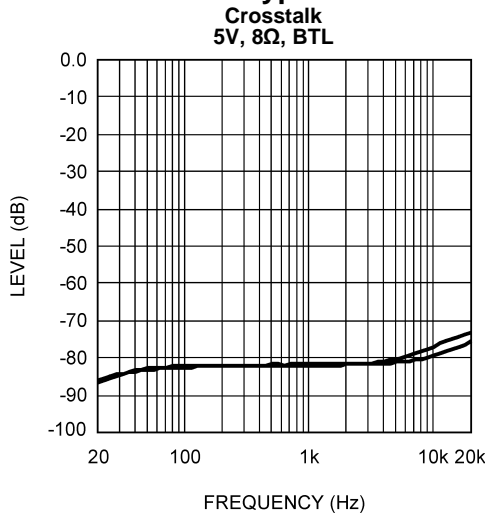


Figure 33.

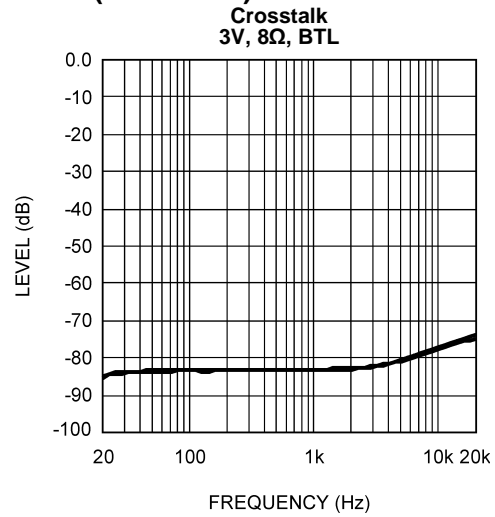


Figure 34.

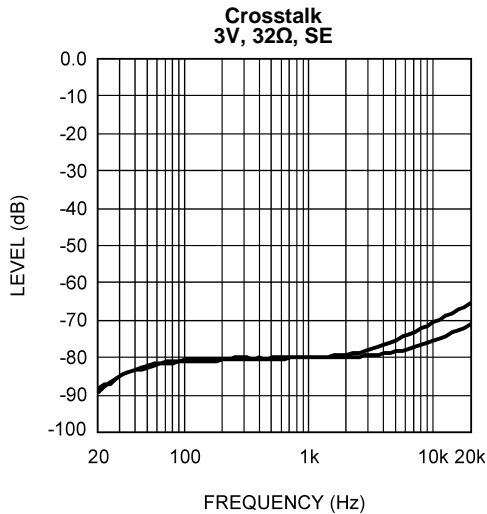


Figure 35.

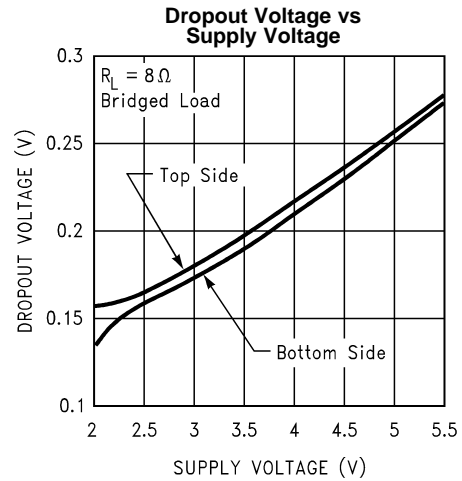


Figure 36.

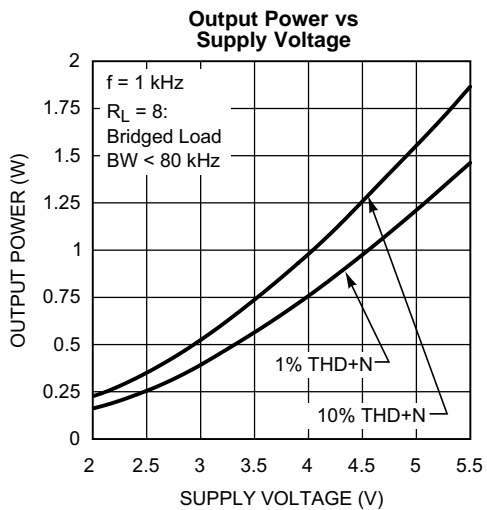


Figure 37.

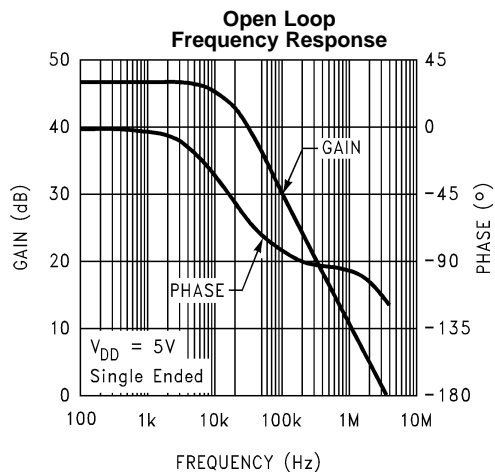


Figure 38.

Typical Performance Characteristics (continued)

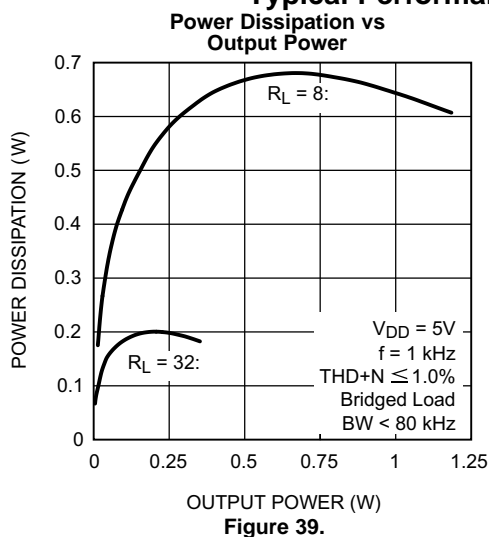


Figure 39.

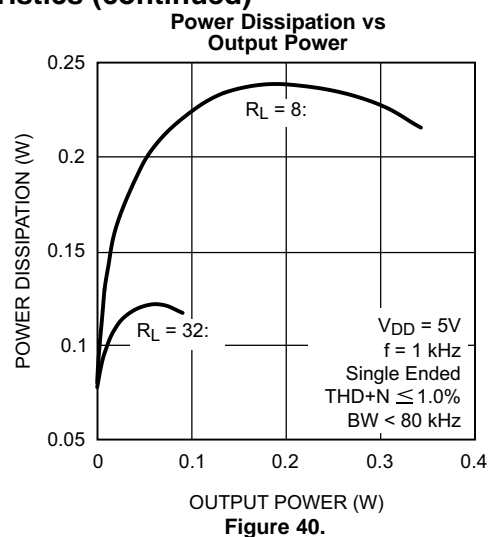


Figure 40.

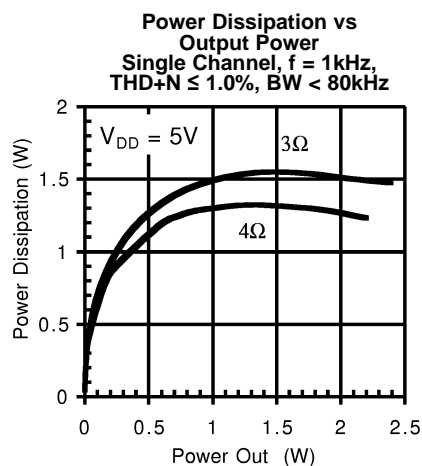


Figure 41.

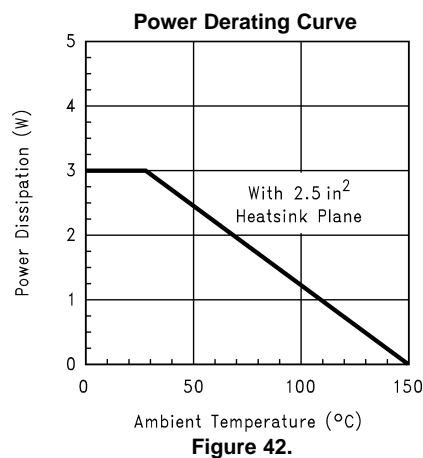


Figure 42.

APPLICATION INFORMATION

STEREO-INPUT MULTIPLEXER (STEREO MUX)

Typical LM4883 applications use the MUX to switch between two stereo input signals. Each stereo channel's gain can be tailored to produce the required output signal level. Choosing the input and feedback resistor ratio sets a MUX channel's gain. Another configuration uses the MUX to select two different gains or frequency compensated gains to amplify a single pair of stereo input signals. Figure 43 shows two different feedback networks, Network 1 and Network 2. Network 1 produces increasing gain as the input signal's frequency decreases. This can be used to compensate a small, full-range speaker's low frequency response roll-off. Network 2 sets the gain for an alternate load such as headphones. Connecting the MUX CTRL and HP-IN pins together applies the same control voltage to the MUX pins when connecting and disconnecting headphones using the headphone jack shown in Figure 44 or Figure 45. Simultaneously applying the control voltage automatically selects the amplifier (headphone or bridge loads) and switches the gain (MUX channel selection). Alternatively, leave the control pins independently accessible. This allows a user to select bass boost as needed. This alternative user-selectable bass-boost scheme requires connecting equal ratio resistor feedback networks to each MUX input channel. The value of the resistor in the RC network is chosen to give a gain that is necessary to achieve the desired bass-boost.

Switching between the MUX channels may change the input signal source or the feedback resistor network. During the channel switching transition, the average voltage level present on the internal amplifier's input may change. This change can slew at a rate that may produce audible voltage transients or clicks in the amplifier's output signal. Using the MUX to select between two vastly dissimilar gains is a typical transient-producing situation. As the MUX is switched, an audible click may occur as the gain suddenly changes.

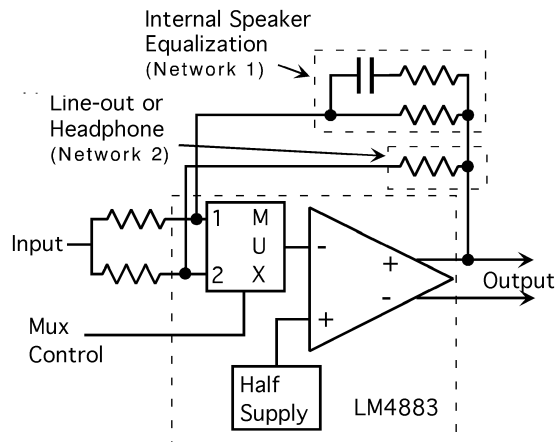


Figure 43. Input MUX Example

EXPOSED-DAP PACKAGE PCB MOUNTING CONSIDERATIONS

The LM4883's SQ exposed-DAP (die attach paddle) package provides a low thermal resistance between the die and the PCB to which the part is mounted and soldered. This allows rapid heat transfer from the die to the surrounding PCB copper traces, ground plane and, finally, surrounding air. The result is a low voltage audio power amplifier that produces 2.1W at $\leq 1\%$ THD with a 4Ω load. This high power is achieved through careful consideration of necessary thermal design. Failing to optimize thermal design may compromise the LM4883SQ's high power performance and activate unwanted, though necessary, thermal shutdown protection.


The SQ package must have its DAP soldered to a copper pad on the PCB. The DAP's PCB copper pad is connected to a large plane of continuous unbroken copper. This plane forms a thermal mass and heat sink and radiation area. Place the heat sink area on either outside plane in the case of a two-sided PCB, or on an inner layer of a board with more than two layers. Connect the DAP copper pad to the inner layer or backside copper heat sink area with 6 (3x2) SQ vias. The via diameter should be 0.012in–0.013in with a 1.27mm pitch. Ensure efficient thermal conductivity by plating-through and solder-filling the vias.

Best thermal performance is achieved with the largest practical copper heat sink area. If the heatsink and amplifier share the same PCB layer, a nominal 2.5in² (min) area is necessary for 5V operation with a 4Ω load. Heatsink areas not placed on the same PCB layer as the LM4883SQ should be 5in² (min) for the same supply voltage and load resistance. The last two area recommendations apply for 25°C ambient temperature. Increase the area to compensate for ambient temperatures above 25°C. In all circumstances and conditions, the junction temperature must be held below 150°C to prevent activating the LM4883SQ's thermal shutdown protection. The LM4883SQ's power de-rating curve in the [Typical Performance Characteristics](#) shows the maximum power dissipation versus temperature. Example PCB layouts for the exposed-Dip SQ package is shown in the [Demonstration Board Layout](#) section. Further detailed and specific information concerning PCB layout, fabrication, and mounting an SQ package is available from National Semiconductor's AN1187.

PCB LAYOUT AND SUPPLY REGULATION CONSIDERATIONS FOR DRIVING 3Ω AND 4Ω LOADS

Power dissipated by a load is a function of the voltage swing across the load and the load's impedance. As load impedance decreases, load dissipation becomes increasingly dependent on the interconnect (PCB trace and wire) resistance between the amplifier output pins and the load's connections. Residual trace resistance causes a voltage drop, which results in power dissipated in the trace and not in the load as desired. For example, 0.1Ω trace resistance reduces the output power dissipated by a 4Ω load from 2.1W to 2.0W. This problem of decreased load dissipation is exacerbated as load impedance decreases. Therefore, to maintain the highest load dissipation and widest output voltage swing, PCB traces that connect the output pins to a load must be as wide as possible.

Poor power supply regulation adversely affects maximum output power. A poorly regulated supply's output voltage decreases with increasing load current. Reduced supply voltage causes decreased headroom, output signal clipping, and reduced output power. Even with tightly regulated supplies, trace resistance creates the same effects as poor supply regulation. Therefore, making the power supply traces as wide as possible helps maintain full output voltage swing.

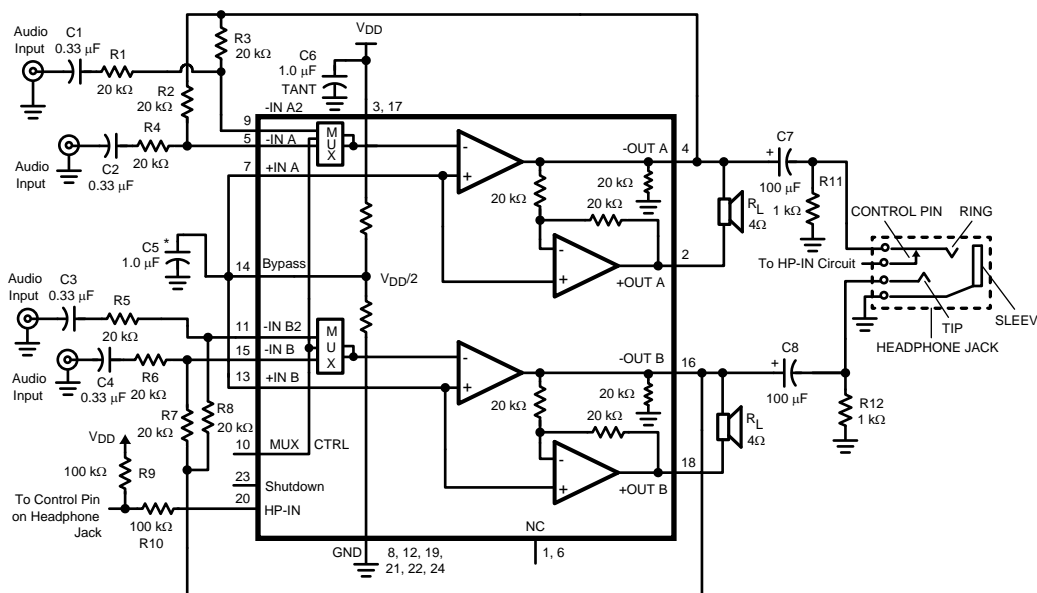

* Refer to the section [SELECTING PROPER EXTERNAL COMPONENTS](#), for a detailed discussion of C5 size.

Figure 44. Typical Audio Amplifier Application Circuit

BRIDGE CONFIGURATION EXPLANATION

As shown in [Figure 44](#), the LM4883 consists of two pairs of operational amplifiers, forming a two-channel (channel A and channel B) stereo amplifier. External feedback resistors $R_{3,2,7,8}$ and input resistors $R_{1,4,5,6}$ set the closed-loop gain of Amp A (-out) and Amp B (-out) whereas two internal 20k Ω resistors set Amp A's (+out) and Amp B's (+out) gain at 1. The LM4883 drives a load, such as a speaker, connected between the two amplifier outputs, -OUTA and +OUTA.

Figure 44 shows that Amp A's (-out) output serves as Amp A's (+out) input. This results in both amplifiers producing signals identical in magnitude, but 180° out of phase. Taking advantage of this phase difference, a load is placed between -OUTA and +OUTA and driven differentially (commonly referred to as "bridge mode"). This results in a differential gain of

$$A_{VD} = 2 * (R_f/R_i) \quad (1)$$

or

$$A_{VD} = 2 * (R_3/R_1)$$

Bridge mode amplifiers are different from single-ended amplifiers that drive loads connected between a single amplifier's output and ground. For a given supply voltage, bridge mode has a distinct advantage over the single-ended configuration: its differential output doubles the voltage swing across the load. This produces four times the output power when compared to a single-ended amplifier under the same conditions. This increase in attainable output power assumes that the amplifier is not current limited or that the output signal is not clipped. To ensure minimum output signal clipping when choosing an amplifier's closed-loop gain, refer to the [AUDIO POWER AMPLIFIER DESIGN](#) section.

Another advantage of the differential bridge output is no net DC voltage across the load. This is accomplished by biasing channel A's and channel B's outputs at half-supply. This eliminates the coupling capacitor that single supply, single-ended amplifiers require. Eliminating an output coupling capacitor in a single-ended configuration forces a single-supply amplifier's half-supply bias voltage across the load. This increases internal IC power dissipation and may permanently damage loads such as speakers.

POWER DISSIPATION

Power dissipation is a major concern when designing a successful single-ended or bridged amplifier. Equation 2 states the maximum power dissipation point for a single-ended amplifier operating at a given supply voltage and driving a specified output load.

$$P_{DMAX} = (V_{DD})^2 / (2\pi^2 R_L) \quad \text{Single-Ended} \quad (2)$$

However, a direct consequence of the increased power delivered to the load by a bridge amplifier is higher internal power dissipation for the same conditions.

The LM4883 has two operational amplifiers per channel. The maximum internal power dissipation per channel operating in the bridge mode is four times that of a single-ended amplifier. From Equation 3, assuming a 5V power supply and a 4Ω load, the maximum single channel power dissipation is 1.27W or 2.54W for stereo operation.

$$P_{DMAX} = 4 * (V_{DD})^2 / (2\pi^2 R_L) \quad \text{Bridge Mode} \quad (3)$$

The LM4883SQ's power dissipation is twice that given by Equation 2 or Equation 3 when operating in the single-ended mode or bridge mode, respectively. Twice the maximum power dissipation point given by Equation 3 must not exceed the power dissipation given by Equation 4:

$$P_{DMAX}' = (T_{JMAX} - T_A) / \theta_{JA} \quad (4)$$

The LM4883's $T_{JMAX} = 150^\circ\text{C}$. In the SQ package soldered to a DAP pad that expands to a copper area of 5in^2 on a PCB, the LM4883SQ's θ_{JA} is 20°C/W . At any given ambient temperature T_A , use Equation 4 to find the maximum internal power dissipation supported by the IC packaging. Rearranging Equation 4 and substituting P_{DMAX} for P_{DMAX}' results in Equation 5. This equation gives the maximum ambient temperature that still allows maximum stereo power dissipation without violating the LM4883's maximum junction temperature.

$$T_A = T_{JMAX} - 2 * P_{DMAX} \theta_{JA} \quad (5)$$

For a typical application with a 5V power supply and an 4Ω load, the maximum ambient temperature that allows maximum stereo power dissipation without exceeding the maximum junction temperature is approximately 99°C for the SQ package.

$$T_{JMAX} = P_{DMAX} \theta_{JA} + T_A \quad (6)$$

Equation 6 gives the maximum junction temperature T_{JMAX} . If the result violates the LM4883's 150°C , reduce the maximum junction temperature by reducing the power supply voltage or increasing the load resistance. Further allowance should be made for increased ambient temperatures.

The above examples assume that a device is a surface mount part operating around the maximum power dissipation point. Since internal power dissipation is a function of output power, higher ambient temperatures are allowed as output power or duty cycle decreases.

If the result of [Equation 2](#) is greater than that of [Equation 3](#), then decrease the supply voltage, increase the load impedance, or reduce the ambient temperature. If these measures are insufficient, a heat sink can be added to reduce θ_{JA} . The heat sink can be created using additional copper area around the package, with connections to the ground pin(s), supply pin and amplifier output pins. External, solder attached SMT heatsinks such as the Thermalloy 7106D can also improve power dissipation. When adding a heat sink, the θ_{JA} is the sum of θ_{JC} , θ_{CS} , and θ_{SA} . (θ_{JC} is the junction-to-case thermal impedance, θ_{CS} is the case-to-sink thermal impedance, and θ_{SA} is the sink-to-ambient thermal impedance.) Refer to the [Typical Performance Characteristics](#) curves for power dissipation information at lower output power levels.

POWER SUPPLY BYPASSING

As with any power amplifier, proper supply bypassing is critical for low noise performance and high power supply rejection. Applications that employ a 5V regulator typically use a 10 μ F in parallel with a 0.1 μ F filter capacitor to stabilize the regulator's output, reduce noise on the supply line, and improve the supply's transient response. However, their presence does not eliminate the need for a local 1.0 μ F tantalum bypass capacitance connected between the LM4883's supply pins and ground. Do not substitute a ceramic capacitor for the tantalum. Doing so may cause oscillation. Keep the length of leads and traces that connect capacitors between the LM4883SQ's power supply pin and ground as short as possible. Connecting a 1 μ F capacitor, C_5 , between the BYPASS pin and ground improves the internal bias voltage's stability and improves the amplifier's PSRR. The PSRR improvements increase as the bypass pin capacitor value increases. Too large, however, increases turn-on time and can compromise amplifier's click and pop performance. The selection of bypass capacitor values, especially C_5 , depends on desired PSRR requirements, click and pop performance (as explained in the section, [SELECTING PROPER EXTERNAL COMPONENTS](#)), system cost, and size constraints.

MICRO-POWER SHUTDOWN

The voltage applied to the SHUTDOWN pin controls the LM4883's shutdown function. Activate micro-power shutdown by applying V_{DD} to the SHUTDOWN pin. When active, the LM4883's micro-power shutdown feature turns off the amplifier's bias circuitry, reducing the supply current. The logic threshold is typically $V_{DD}/2$. The low 0.04 μ A typical shutdown current is achieved by applying a voltage that is as near as V_{DD} as possible to the SHUTDOWN pin. A voltage that is less than V_{DD} may increase the shutdown current. [Table 2](#) shows the logic signal levels that activate and deactivate micro-power shutdown and headphone amplifier operation.

There are a few ways to control the micro-power shutdown. These include using a single-pole, single-throw switch, a microprocessor, or a microcontroller. When using a switch, connect an external 10k Ω pull-up resistor between the SHUTDOWN pin and V_{DD} . Connect the switch between the SHUTDOWN pin and ground. Select normal amplifier operation by closing the switch. Opening the switch connects the SHUTDOWN pin to V_{DD} through the pull-up resistor, activating micro-power shutdown. The switch and resistor guarantee that the SHUTDOWN pin will not float. This prevents unwanted state changes. In a system with a microprocessor or a microcontroller, use a digital output to apply the control voltage to the SHUTDOWN pin. Driving the SHUTDOWN pin with active circuitry eliminates the pull up resistor.

Table 2. Logic Level Truth Table for SHUTDOWN, HP-IN, and MUX Operation

| SHUTDOWN PIN | HP-INPIN | MUX CHANNEL SELECT PIN | OPERATIONAL MODE (MUX INPUT CHANNEL #) |
|--------------|------------|------------------------|--|
| Logic Low | Logic Low | Logic Low | Bridged Amplifiers (1) |
| Logic Low | Logic Low | Logic High | Bridged Amplifiers (2) |
| Logic Low | Logic High | Logic Low | Single-Ended Amplifiers (1) |
| Logic Low | Logic High | Logic High | Single-Ended Amplifiers (2) |
| Logic High | X | X | Micro-Power Shutdown |

HP-IN FUNCTION

Applying a voltage between 4V and V_{DD} to the LM4883's HP-IN headphone control pin turns off Amp A (+out) and Amp B (+out) muting a bridged-connected load. Quiescent current consumption is reduced when the IC is in this single-ended mode.

Figure 45 shows the implementation of the LM4883's headphone control function. With no headphones connected to the headphone jack, the R9-R10 voltage divider sets the voltage applied to the HP-IN pin (pin 20) at approximately 50mV. This 50mV enables Amp A (+out) and Amp B (+out) placing the LM4883 in bridged mode operation. The output coupling capacitor blocks the amplifier's half supply DC voltage, protecting the headphones.

The HP-IN threshold is set at 4V. While the LM4883 operates in bridged mode, the DC potential across the load is essentially 0V. Therefore, even in an ideal situation, the output swing cannot cause a false single-ended trigger. Connecting headphones to the headphone jack disconnects the headphone jack contact pin from -OUTA and allows R1 to pull the HP Sense pin up to V_{DD} . This enables the headphone function, turns off Amp A (+out) and Amp B (+out) which mutes the bridged speaker. The amplifier then drives the headphones, whose impedance is in parallel with resistors R11 and R12. These resistors have negligible effect on the LM4883's output drive capability since the typical impedance of headphones is 32 Ω .

Figure 45 also shows the suggested headphone jack electrical connections. The jack is designed to mate with a three-wire plug. The plug's tip and ring should each carry one of the two stereo output signals, whereas the sleeve should carry the ground return. A headphone jack with one control pin contact is sufficient to drive the HP-IN pin when connecting headphones.

A microprocessor or a switch can replace the headphone jack contact pin. When a microprocessor or switch applies a voltage greater than 4V to the HP-IN pin, a bridge-connected speaker is muted and Amp A (-out) and Amp B (-out) drive a pair of headphones.

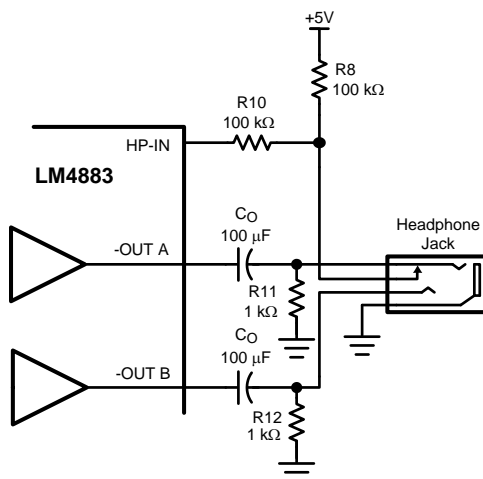


Figure 45. Headphone Circuit

SELECTING PROPER EXTERNAL COMPONENTS

Optimizing the LM4883's performance requires properly selecting external components. Though the LM4883 operates well when using external components with wide tolerances, best performance is achieved by optimizing component values.

The LM4883 is unity-gain stable, giving a designer maximum design flexibility. The gain should be set to no more than a given application requires. This allows the amplifier to achieve minimum THD+N and maximum signal-to-noise ratio. These parameters are compromised as the closed-loop gain increases. However, low gain demands input signals with greater voltage swings to achieve maximum output power. Fortunately, many signal sources such as audio CODECs have outputs of 1V_{RMS} (2.83V_{P-P}). Please refer to the [AUDIO POWER AMPLIFIER DESIGN](#) section for more information on selecting the proper gain.

Input Capacitor Value Selection

Amplifying the lowest audio frequencies requires high value input coupling capacitors (C1–4) in Figure 2 and Figure 44. A high value capacitor can be expensive and may compromise space efficiency in portable designs. In many cases, however, the speakers used in portable systems, whether internal or external, have little ability to reproduce signals below 150 Hz. Applications using speakers with this limited frequency response reap little improvement by using large input capacitor.

Besides effecting system cost and size, C1–4 have an effect on the LM4883's click and pop performance. When the supply voltage is first applied, a transient (pop) is created as the charge on the input capacitor changes from zero to a quiescent state. The magnitude of the pop is directly proportional to the input capacitor's size. Higher value capacitors need more time to reach a quiescent DC voltage (usually $V_{DD}/2$) when charged with a fixed current. The amplifier's output charges the input capacitor through the feedback resistors, R2,3,7, and 8. Thus, pops can be minimized by selecting an input capacitor value that is no higher than necessary to meet the desired –3dB frequency.

As shown in Figure 44, the input resistors (R1,4,5, and 6) and the input capacitors, C1–4 produce a –3dB high pass filter cutoff frequency that is found using Equation 7.

$$f_{-3dB} = \frac{1}{2\pi R_{IN} C_{IN}} = \frac{1}{2\pi R1 C1} \quad (7)$$

As an example when using a speaker with a low frequency limit of 150Hz, C₁, using Equation 7 is 0.053μF. The .33μF C₁ shown in Figure 44 allows the LM4883 to drive high efficiency, full range speaker whose response extends below 30Hz.

Bypass Capacitor Value Selection

Besides minimizing the input capacitor size, careful consideration should be paid to value of C₅, the capacitor connected to the BYPASS pin. Since C₅ determines how fast the LM4883 settles to quiescent operation, its value is critical when minimizing turn-on pops. The slower the LM4883's outputs ramp to their quiescent DC voltage (nominally 1/2 V_{DD}), the smaller the turn-on pop. Choosing C₅ equal to 1.0 μF along with a small value of C₁ (in the range of 0.1 μF to 0.39 μF), produces a click-less and pop-less shutdown function. As discussed above, choosing C₁ no larger than necessary for the desired bandwidth helps minimize clicks and pops.

OPTIMIZING CLICK AND POP REDUCTION PERFORMANCE

The LM4883 contains circuitry that minimizes turn-on and shutdown transients or “clicks and pop”. For this discussion, turn-on refers to either applying the power supply voltage or when the shutdown mode is deactivated. While the power supply is ramping to its final value, the LM4883's internal amplifiers are configured as unity gain buffers. An internal current source changes the voltage of the BYPASS pin in a controlled, linear manner. Ideally, the input and outputs track the voltage applied to the BYPASS pin. The gain of the internal amplifiers remains unity until the voltage on the bypass pin reaches 1/2 V_{DD}. As soon as the voltage on the bypass pin is stable, the device becomes fully operational. Although the BYPASS pin current cannot be modified, changing the size of C₅ alters the device's turn-on time and the magnitude of “clicks and pops”. Increasing the value of C₅ reduces the magnitude of turn-on pops. However, this presents a tradeoff: as the size of C₅ increases, the turn-on time increases. There is a linear relationship between the size of C₅ and the turn-on time. Here are some typical turn-on times for various values of C₅:

| C ₅ | T _{ON} |
|----------------|-----------------|
| 0.01μF | 30ms |
| 0.1μF | 40ms |
| 0.22μF | 60ms |
| 0.47μF | 80ms |
| 1.0μF | 140 ms |

In order eliminate “clicks and pops”, all capacitors must be discharged before turn-on. Rapidly switching V_{DD} may not allow the capacitors to fully discharge, which may cause “clicks and pops”. In a single-ended configuration, the output is coupled to the load by C7,8. These capacitors usually have a high value. C7,8 discharges through internal 20kΩ resistors. Depending on the size of C7,8, the discharge time constant can be relatively large. To reduce transients in single-ended mode, an external 1kΩ–5kΩ resistor can be placed in parallel with the internal 20kΩ resistor. The tradeoff for using this resistor is increased quiescent current.

NO LOAD STABILITY

The LM4883 may exhibit low level oscillation when the load resistance is greater than 10kΩ. This oscillation only occurs as the output signal swings near the supply voltages. Prevent this oscillation by connecting a 5kΩ between the output pins and ground.

AUDIO POWER AMPLIFIER DESIGN

Audio Amplifier Design: Driving 1W into an 8Ω Load

The following are the desired operational parameters:

| | |
|------------------|----------------------|
| Power Output: | 1W _{RMS} |
| Load Impedance: | 8Ω |
| Input Level: | 1V _{rms} |
| Input Impedance: | 20kΩ |
| Bandwidth: | 100Hz–20kHz ± 0.25dB |

The design begins by specifying the minimum supply voltage necessary to obtain the specified output power. One way to find the minimum supply voltage is to use the Output Power vs Supply Voltage curve in the [Typical Performance Characteristics](#) section. Another way, using [Equation 8](#), is to calculate the peak output voltage necessary to achieve the desired output power for a given load impedance. To account for the amplifier's dropout voltage, two additional voltages, based on the Dropout Voltage vs Supply Voltage in the [Typical Performance Characteristics](#) curves, must be added to the result obtained by [Equation 8](#). The result in [Equation 9](#).

$$V_{OUTPEAK} = \sqrt{(2R_L P_O)} \quad (8)$$

$$V_{DD} \geq (V_{OUTPEAK} + (V_{ODTOP} + V_{ODBOT})) \quad (9)$$

The Output Power vs Supply Voltage graph for an 8Ω load indicates a minimum supply voltage of 4.6V. This is easily met by the commonly used 5V supply voltage. The additional voltage creates the benefit of headroom, allowing the LM4883 to produce peak output power in excess of 1W without clipping or other audible distortion. The choice of supply voltage must also not create a situation that violates maximum power dissipation as explained above in the [POWER DISSIPATION](#) section.

After satisfying the LM4883's power dissipation requirements, the minimum differential gain needed to achieve 1W dissipation in an 8Ω load is found using [Equation 10](#).

$$A_{VD} \geq \sqrt{(P_O R_L)} / (V_{IN}) = V_{ORMS} / V_{INRMS} \quad (10)$$

Thus, a minimum gain of 2.83 allows the LM4883's to reach full output swing and maintain low noise and THD+N performance. For this example, let $A_{VD} = 3$.

The amplifier's overall gain is set using the input (R_1) and feedback (R_3) resistors. With the desired input impedance set at 20kΩ, the feedback resistor is found using [Equation 11](#).

$$R_3 / R_1 = A_{VD} / 2 \quad (11)$$

The value of R_f is 30kΩ.

The last step in this design example is setting the amplifier's –3dB frequency bandwidth. To achieve the desired ±0.25dB pass band magnitude variation limit, the low frequency response must extend to at least one-fifth the lower bandwidth limit and the high frequency response must extend to at least five times the upper bandwidth limit. The gain variation for both response limits is 0.17dB, well within the ±0.25dB desired limit. The results are an

$$f_L = 100\text{Hz} / 5 = 20\text{Hz} \quad (12)$$

and an

$$f_H = 20\text{kHz} * 5 = 100\text{kHz}. \quad (13)$$

As mentioned in the [Table 1](#) section, R_1 and C_1 create a highpass filter that sets the amplifier's lower bandpass frequency limit. Find the coupling capacitor's value using [Equation 14](#).

$$C_1 \geq 1 / (2\pi R_1 f_L) \quad (14)$$

The result is

$$1 / (2\pi * 20\text{k}\Omega * 20\text{Hz}) = 0.398\mu\text{F}. \quad (15)$$

Use a 0.39μF capacitor, the closest standard value.

The product of the desired high frequency cutoff (100kHz in this example) and the differential gain, AV_D , determines the upper passband response limit. With $A_{VD} = 3$ and $f_H = 100\text{kHz}$, the closed-loop gain bandwidth product (GBWP) is 300kHz. This is less than the LM4883's 3.5MHz GBWP. With this margin, the amplifier can be used in designs that require more differential gain while avoiding performance-restricting bandwidth limitations.

RECOMMENDED PRINTED CIRCUIT BOARD LAYOUT

Figure 46 through Figure 48 show the recommended two-layer PC board layout that is optimized for the 24-pin SQ package. These circuits are designed for use with an external 5V supply and 8Ω, 4Ω, 3Ω speakers.

These circuit boards are easy to use. Apply 5V and ground to the board's V_{DD} and GND pads, respectively. Connect the speakers between the board's -OUTA and +OUTA and OUTB and +OUTB pads.

Demonstration Board Layout

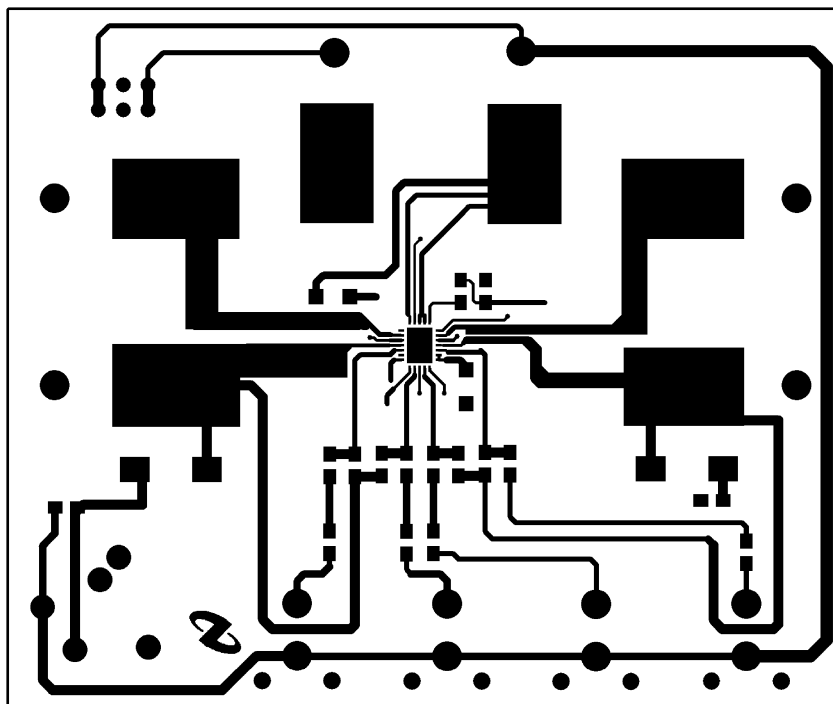


Figure 46. Top Layer

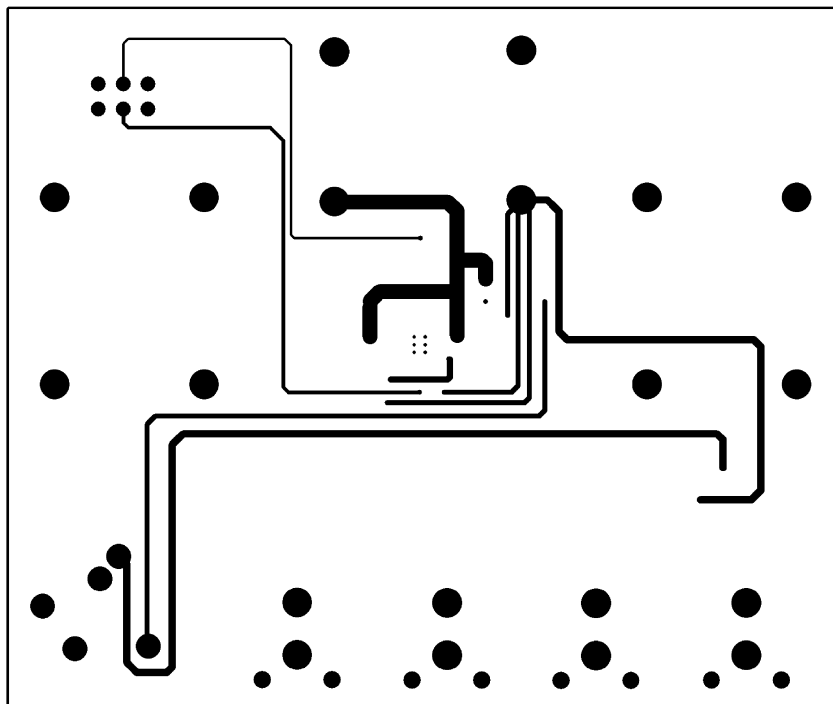


Figure 47. Bottom Layer

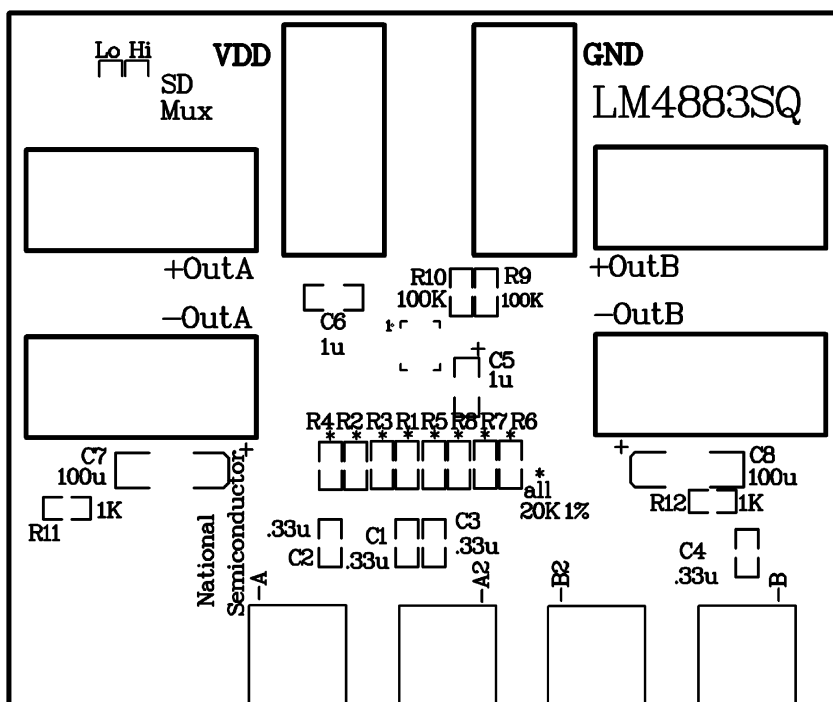


Figure 48. Silkscreen

Bill of Materials

Analog Audio LM4883SQ Eval Board

Assembly Part Number: 551012279–001

Revision: A

| Item | Part Number | Part Description | Qty | Ref Designator | Remark |
|------|---------------|--|-----|-----------------------|---------------------|
| 1 | 551012279–001 | LM4883SQ Eval Board PCB etch 001 | 1 | | |
| 2 | | IC LM4883SQ | 1 | U1 | |
| 3 | | Tant Cap 0.33 μ F 50V 10% | 4 | C1–C4 | |
| 4 | | Tant Cap 1 μ F 16V 10% Size = A 3216 | 2 | C5, C6 | |
| 5 | | Tant Cap 100 μ F 16V 10% Size = D 7343 | 2 | C7, C8 | |
| 6 | | Res 1k Ω 1/8W 1% 0805 | 2 | R11, R12 | |
| 7 | | Res 20k Ω 1/8W 1% 0805 | 8 | R1–R8 | |
| 8 | | Res 100k Ω 1/8W 1% 0805 | 2 | R9, R10 | |
| 9 | | RCA Jack | 4 | –A, –A2, –B, –B2 | Mouser # 16PJ097 |
| 10 | | Banana Jack, Black | 3 | –OutA, – OutB, GND | Mouser # ME164–6218 |
| 11 | | Banana Jack, Red | 3 | +OutA, + OutB, VDD | Mouser # ME164–6219 |
| 12 | | Jumper Header 3 x 1 | 2 | SD, MUX | |

REVISION HISTORY

| Changes from Revision B (April 2013) to Revision C | Page |
|--|--------------------|
| • Changed layout of National Data Sheet to TI format | 26 |

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products

| | |
|------------------------------|--|
| Audio | www.ti.com/audio |
| Amplifiers | amplifier.ti.com |
| Data Converters | dataconverter.ti.com |
| DLP® Products | www.dlp.com |
| DSP | dsp.ti.com |
| Clocks and Timers | www.ti.com/clocks |
| Interface | interface.ti.com |
| Logic | logic.ti.com |
| Power Mgmt | power.ti.com |
| Microcontrollers | microcontroller.ti.com |
| RFID | www.ti-rfid.com |
| OMAP Applications Processors | www.ti.com/omap |
| Wireless Connectivity | www.ti.com/wirelessconnectivity |

Applications

| | |
|-------------------------------|--|
| Automotive and Transportation | www.ti.com/automotive |
| Communications and Telecom | www.ti.com/communications |
| Computers and Peripherals | www.ti.com/computers |
| Consumer Electronics | www.ti.com/consumer-apps |
| Energy and Lighting | www.ti.com/energy |
| Industrial | www.ti.com/industrial |
| Medical | www.ti.com/medical |
| Security | www.ti.com/security |
| Space, Avionics and Defense | www.ti.com/space-avionics-defense |
| Video and Imaging | www.ti.com/video |

TI E2E Community

e2e.ti.com