(Revised 6/20/2002)



## **Features**

36V to 75V Input Voltage Range

DEXCALIBUR

- Programmable Output Voltage Range: 1.3V to 3.5V
- -40° to +85°C Ambient
- 1500 VDC Isolation
- 89% Efficiency
- On/Off Inhibit
- Differential Remote Sense
- 60A Output with PT4499

- Over-Current Protection
- Over-Temperature Protection
- Over-Voltage Protection
- Space-Saving Package
- Solderable Copper Case
- Safety Approvals: UL 60950 CSA 22.2 950

VDE EN60950 Pending

# **Description**

The PT4482 Excalibur™ DC/DC converter module combines state-of-theart power conversion technology with un-paralleled flexibility. Incorporating high efficiency and ultra-fast transient response, these modules provide up to 30A of output current over the programmable voltage range of 1.3V to 3.5V. This represents a full 100W output at 3.3V.

The modules include a number of inbuilt features to facilitate system integration. These include a foldback output current limit, over-temperature protection, and an inhibit on/off control. A differential remote sense is also provided to compensate for voltage drop between the converter and load.

For additional output current, one PT4482 may be operated with up to two PT4499 compatible booster modules. Each PT4499 adds an additional 30A of output current capability.

# **Ordering Information**

**PT4482** = 1.3 to 3.5 Volts **PT4499** = 30-A Booster

# PT Series Suffix (PT1234x)

Case/Pin Configuration	Order Suffix	Package Code *
Vertical	N	(EKD)
Horizontal	Α	(EKA)
SMD	C	(EKC)

<sup>\*</sup> Previously known as package styles 1200, 1210, and 1215.


(Reference the applicable package code drawing for the dimensions and PC board layout)

# **Pin-Out Information**

Pin	Function	Pin	Function
1	$+V_{in}$	14	$-V_{out}$
2	$-V_{in}$	15	$-V_{out}$
3	Inhibit	16	$-V_{out}$
4	V <sub>r</sub> †	17	$-V_{out}$
5	Va †	18	$-V_{out}$
6	Do not connect	19	$-V_{out}$
7	(+)Remote Sense	20	(–)Remote Sense
8	+ $V_{out}$	21	VID0
9	+ $V_{out}$	22	VID1
10	+V <sub>out</sub>	23	VID2
11	+ $V_{out}$	24	VID3
12	+ $V_{out}$	25	VID4
13	+Vout	26	DRV †

- † Pins 4, 5, & 26 are used for booster applications. For stand-alone operation, leave open circuit.
- Shaded functions indicate those pins that are referenced to primary-side potential.

# **Standard Application**

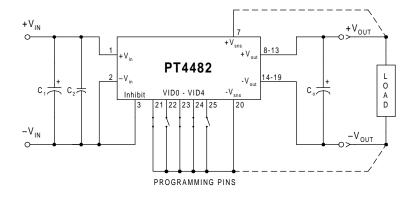

- C<sub>o</sub> = Optional 330µF electrolytic capacitor
- C<sub>1</sub> = Optional 33µF, 100V electrolytic capacitor
- C2 = Optional 1µF, 100V ceramic capacitor
- Programming pins, VID0–VID4, are shown configured for Vo =3.3V
- For normal operation, pin 3 (Inhibit) must be



# 100-W 30-A Programmable Isolated DC/DC Converter

## **Programming Information**

VID3	VID2	VID1	VIDO	VID4=1 Vout	VID4=0 Vout
1	1	1	1	2.0V	1.30V
1	1	1	0	2.1V	1.35V
1	1	0	1	2.2V	1.40V
1	1	0	0	2.3V	1.45V
1	0	1	1	2.4V	1.50V
1	0	1	0	2.5V	1.55V
1	0	0	1	2.6V	1.60V
1	0	0	0	2.7V	1.65V
0	1	1	1	2.8V	1.70V
0	1	1	0	2.9V	1.75V
0	1	0	1	3.0V	1.80V
0	1	0	0	3.1V	1.85V
0	0	1	1	3.2V	1.90V
0	0	1	0	3.3V	1.95V
0	0	0	1	3.4V	2.00V
0	0	0	0	3.5V	2.05V

Logic 0 = Connect to (–)Remote Sense, pin 20

Logic 1 = Open circuit (no pull-up resistors)
VID3 & VID4 <u>must not</u> be changed while unit is operating

#### PT4497 PT4486 Booster N/A Used only with PT4486

# This specification covers only the PT4482 regulator and PT4499 current booster.

Output Voltage

Program Range 1.3V-3.5V

1.3V-3.5V

N/A

4.6V-5.7V

4.6V-5.7V

N/A

6.5V-17.5V

6.5V-17.5V

Configuration for

N+1 with other PT4481s

With PT4499 boosters

Used only with PT4482

N+1 with other PT4483s

With PT4498 boosters

Used only with PT4484

N+1 with other PT4485s

With PT4497 boosters

Current Sharing

**PT4480 Series Comparison** 

PT4481

PT4482

PT4499

PT4483

PT4484

PT4498

PT4485

PT4486

Functionality

Regulator

Regulator

Regulator

Regulator

Regulator

Regulator

PT4482 Booster

PT4484 Booster

# **Specifications** (Unless otherwise stated T.

			PT4482			
Characteristic	Symbol	Conditions	Min	Тур	Max	Units
Output Current	$I_{o}$	Over V <sub>in</sub> range	0	_	30	A
Input Voltage Range	V <sub>in</sub>	Over I <sub>o</sub> Range	36	48	75	VDC
Set Point Voltage Tolerance	Votol		_	±1	±1.5	%V <sub>o</sub>
Temperature Variation	Reg <sub>temp</sub>	$-40^{\circ} \le \Gamma_{case} \le +100^{\circ}C, I_{o} = 0$	_	±0.5	_	%Vo
Line Regulation	Regline	Over V <sub>in</sub> range	_	±0.1	±1	$%V_{o}$
Load Regulation	Regload	Over I <sub>o</sub> range	_	±0.2	±1	$%V_{o}$
Total Output Voltage Variation	$\Delta V_{o}$ tot	Includes set-point, line, load, $-40^{\circ} \le \Gamma_{\text{case}} \le +100^{\circ}\text{C}$	_	±2	±3	$%V_{o}$
Efficiency	η	$I_{o} = 15A$ $V_{o} = 3.3V$ $V_{o} = 2.5V$ $V_{o} = 1.5V$	_ _ _	89 87 81		%
V <sub>o</sub> Ripple (pk-pk)	$V_r$	20MHz bandwidth $V_o>2V \ V_o\le 2V$	=	60 45	75 55	$mV_{pp}$
Transient Response	$ au_{ m tr} \ \Delta V_{ m tr}$	0.1A/µs load step, 50% to 75% $I_{o}$ max $V_{o}$ over/undershoot	_	N/A 1	_	μs %V <sub>o</sub>
		$1$ A/μs load step, 50% to 100% $I_o$ max $V_o$ over/undershoot	_	75 ±5	_	μs %Vo
Current Limit	$I_{ m lim}$	V <sub>in</sub> =36V, ΔV <sub>o</sub> = -1% foldback continuous limit	_	35	_	A
Current Share Tolerance	I <sub>shr</sub> tol	with PT4499 booster	_	±10	_	%
Over-Voltage Protection	OVP	Shutdown and latch off	_	125	_	$%V_{o}$
Switching Frequency	$f_{s}$	Over V <sub>in</sub> range	270	300	350	kHz
Under-Voltage Lockout	UVLO		_	34.5	_	V
Inhibit (Pin 3) Input High Voltage Input Low Voltage	$V_{ m IH} \ V_{ m IL}$	Referenced to -V <sub>in</sub> (pin 2)	2.5 -0.5	=	Open (1) +0.8	v
Input Low Current	I <sub>IL</sub>		_	-0.2	_	mA
Standby Input Current	I <sub>in</sub> standby	pins 3 & 2 connected	_	4	10	mA
Internal Input Capacitance	C <sub>in</sub>		_	3		μF
External Output Capacitance	C <sub>out</sub>	Between +Vo and -Vo	0		10,000	μF
Isolation Voltage Capacitance Resistance		Input–output/input–case Input to output Input to output	$\frac{1500}{10}$	1100 —	_	V pF MΩ
Operating Temperature Range	T <sub>c</sub>	Case temperature, over V <sub>in</sub> range	-40	_	+115 (2)	°C
Over-Temperature Shutdown	OTP	Case temperature, auto reset	_	120	_	°C
Storage Temperature	Ts	_	-40	_	+125	°C
Reliability	MTBF	Per Bellcore TR-332 50% stress, T <sub>a</sub> =40°C, ground benign	1.4	_	_	106 F
Mechanical Shock	_	Per Mil-Std-883D, method 2002.3, 1mS, half-sine, mounted to a fixture	_	500	_	G's
Mechanical Vibration	_	Mil-Std-883D, Method 2007.2 Horizontal 20-2000Hz, pcb mounted	_	20 (3)	_	G's
Weight			_	90	_	gram
Flammability	_	Materials meet UL 94V-0				

Notes: (1) The Inhibit (pin 3) has an internal pull-up, which if left open circuit allows the converter to operate when input power is applied. The open-circuit is limited to 6.5V. Refer to the application notes for interface considerations.


(2) See Safe Operating Area curves or contact the factory for the appropriate derating.


(3) The case pins on through-hole pin configuration (suffix A) must be soldered. For more information see the applicable package outline drawing.




100-W 30-A Programmable Isolated DC/DC Converter


# Performance Characteristics, $V_0 = 3.3V$ (See Note A)







# Safe Operating Area, $V_{in} = 48V$ (See Note B)



Note A: Characteristic data has been developed from actual products tested at 25°C. This data is considered typical data for the Converter.

Note B: SOA curves represent the conditions at which internal components are at or below the manufacturer's maximum operating temperatures

PT4482, PT4499

# Increasing the Output Current of the PT4482 with the PT4499 Compatible Current Booster

The PT4499 is a 30-A "Current Booster" module designed specifically for the PT4482 programmable DC/DC converter. The booster is controlled directly by the regulator, and effectively adds an additional output stage that operates in parallel. This allows the system to run sychronously, providing a low noise solution. Up to two booster modules can be connected to a PT4482 converter. Each booster module increases the available output current by 30A. A combination of one PT4482 converter and two PT4499 booster modules can supply up to 90A of output current; enough to supply virtually any multi-processor application. Figure 1-1 shows the connection schematic for the regulator and current booster combination.

A current booster is not a stand-alone product, and can only operate with a regulator. It is housed in the same package as its compatible regulator, and shares the same mechanical outline. Except for an increase in output current, the overall performance of a converter/booster combination is identical to that of a stand-alone converter.


### Notes:

- 1. Refer to the PT4482 specification table for the performance of the regulator/booster combination.
- The pin-out of the current booster modules include a number pins identified, "Do not connect" (see Table 1-1).
   These pins are not connected internally to the module but must be soldered to a pad to preserve the unit's mechanical integrity.
- 3. A minimum of 330μF of output capacitance is required across the output of each PT4499 booster for proper operation. A value greater than 330μF will further reduce transients due to large and/or fast load steps.
- 4. The converter and all boosters <u>must be</u> located on the same printed circuit board. A similar footprint and trace layout for each module will also facilitate current sharing.

Table 1-1; Booster Pin-Out Information

Pin	Function	Pin Function	Pin Function
1	+ $ m V_{in}$	10 +V <sub>out</sub>	19 -V <sub>out</sub>
2	-V <sub>in</sub>	11 +V <sub>out</sub>	20 (–)Vsense
3	Do not connect	12 +V <sub>out</sub>	21 Do not connect
4	V <sub>r</sub>	13 +V <sub>out</sub>	22 Do not connect
5	Va	14 -V <sub>out</sub>	23 Do not connect
6	Do not connect	15 -V <sub>out</sub>	24 Do not connect
7	Do not connect	16 -V <sub>out</sub>	25 Do not connect
8	+Vout	17 -V <sub>out</sub>	26 DRV
9	+Vout	18 -V <sub>out</sub>	

Figure 1-1; Current Booster Application Schematic

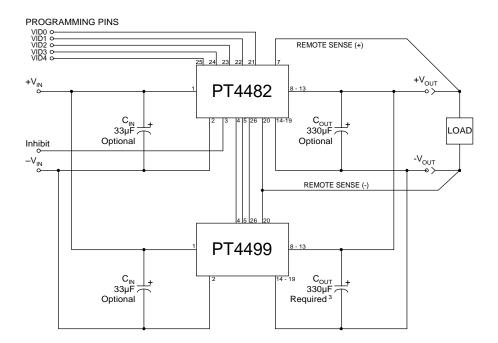

PT4470, PT4480 Series

# Operating Features of the PT4470 and PT4480 Series of Isolated DC/DC Converters

# **Under-Voltage Lockout**

An Under-Voltage Lock-Out (UVLO) inhibits the operation of the converter until the input voltage is above the UVLO threshold (see the applicable data sheet specification). Below this voltage, the module's output is held off, irrespective of the state of the Inhibit control (pin 3). If the *Inhibit* control is connected to -V<sub>in</sub> (pin 2), the module will automatically power up when the input voltage rises above the UVLO threshold. The UVLO allows the module to produce a clean transition during both power-up and power-down, even when the input voltage is rising or falling slowly. It also reduces the high start-up current during normal power-up of the converter, and minimizes the current drain from the input source during low-input voltage conditions. The UVLO threshold includes about 2V of hysteresis. Once operational, the converter will conform to its operating specifications when the minimum specified input voltage is reached.

### **Over-Current Protection**

To protect against load faults, the PT4470/80 series of DC/DC converters incorporate an output current limit. Once the load current drawn from the module reaches the current limit threshold, any attempt by the load to draw additional current will result in a significant drop in the module's regulated output voltage. The current limit circuitry incorporates a limited amount of foldback. This has the effect of slightly reducing the output current from the module when supplying an absolute short circuit. Upon removal of the load fault, the output voltage from the converter will automatically recover to its programmed regulation voltage.

# **Output Over-Voltage Protection**

The PT4470/80 series of DC/DC converters incorporate circuitry that continually senses the output for an overvoltage (OV) condition. The OV threshold automatically tracks the VID output voltage program setting to a level 25% higher than that programmed at the control pins, VID0 through VID4. If the converter output voltage exceeds the OV threshold, the converter is immediately shut down and remains in a latched-off state. To resume normal operation the converter must be actively reset. This is accomplished by either cycling the status of the *Inhibit* control (pin 3) from "On" to "Off" and then back "On" again, or by momentarily removing the input power to the converter. For failsafe operation and redundancy, the OV protection uses circuitry that is independent of the converter's internal feedback loop.

### **Over-Temperature Protection**

Over-temperature protection is provided by an internal temperature sensor, which closely monitors the temperature of the converter's metal case. If the case temperature exceeds the specified limit (see applicable data sheet), the converter will shut down. The converter will then automatically restart when the sensed temperature drops by about 10°C. When operated outside its recommended thermal derating envelope (see data sheet SOA curves), the converter will typcially cycle on and off at intervals from a few seconds to one or two minutes. This is to ensure that the internal components are not permanently damaged from excessive thermal stress.

# **Primary-Secondary Isolation**

Electrical isolation is provided between the input terminals (primary) and the output terminals (secondary). All converters are production tested to a primary-secondary withstand voltage of 1500VDC. This specification complies with UL60950 and EN60950 and the requirements for operational isolation. Operational isolation allows these converters to be configured for either a positive or negative input voltage source. The data sheet 'Pin-Out Information' uses shading to indicate which pins are associated with the primary. They include pins 1 through 5, inclusive.


# **Fuse Recommendations**

If desired, an input fuse may be added to protect against the application of a reverse input voltage.

# **Thermal Considerations**

Airflow may be necessary to ensure that the module can supply the desired load current in environments with elevated ambient temperatures. The required airflow rate may be determined from the Safe Operating Area (SOA) thermal derating chart (see converter specifications). The recommended direction for airflow is into the longest side of the module's metal case. See Figure 1.

Figure 1



PT4470, PT4480 Series

# Using the Inhibit Function on the PT4470 & PT4480 Series of Isolated DC/DC Converters

The PT4470/44480 series of DC/DC converters incorporate an On/Off Inhibit function. This function may be used in applications that demand battery conservation, power-up/shutdown sequencing, and/or to coordinate power-up for active in-rush current control.

The On/Off feature is provided by the *Inhibit* control, pin 3. The *Inhibit* pin of the PT4470/4480 series of converters is an active low enable. The pin must be either connected, or actively pulled low, to  $-V_{in}$  (pin 2) to enable the converter output (see standard application schematic). When pins 2 & 3 are connected, the converter provides a regulated output whenever a valid source voltage<sup>3</sup> is applied between  $+V_{in}$  (pin 1), and  $-V_{in}$  (pin 2). If pin 3 is disconnected, or allowed to become high impedance, the regulator output will be disabled. 5

Table 2-1 provides details of the interface requirements for the *Inhibit* pin. Figure 2-1 shows how a discrete MOSFET ( $Q_1$ ) 4, may be referenced to  $-V_{in}$  and used to control the input.

Table 2-1 Inhibit Control Requirements

Parameter	Min	Max	
Enable (VIH)	-0.5V	0.8V	
Disable (V <sub>IL</sub> )	2.5V	(Open Circuit)	

## Notes:

- 1. The *Inhibit* control uses  $-V_{in}$  (pin 2), on the primary side of the converter, as its ground reference. All voltages specified are with respect to  $-V_{in}$ .
- 2. The internal circuitry is simple pull-up resistor. The open-circuit voltage may be as high as 6.5Vdc.
- 3. These converters incorporate an "Under-Voltage Lockout" (UVLO) function. This function automatically disables the converter output until there is sufficient input voltage to produce a regulated output. Table 2 gives the applicable UVLO thresholds.


Table 2-2 UVLO Thresholds 1

Series	UVLO Threshold	V <sub>in</sub> Range	
PT4470	17.0V Typical	18 – 36V	
PT4480	34.5V Typical	36 – 75V	

- 4. The *Inhibit* input must be controlled with an open-collector (or open-drain) discrete transistor or MOSFET. <u>Do not</u> use a pull-up resistor.
- 5. When the converter output is disabled, the current drawn from the input supply is typically reduced to 4mA (10mA maximum).


Keep the on/off transition to less than 1ms. This
prevents erratic operation of the ISR, whereby the
output voltage may drift un-regulated between 0V
and the rated output during power-up.

Figure 2-1



**Turn-On Time:** With input power applied, the converter typically produces a fully regulated output voltage within 25ms after applying a low-voltage signal to the *Inhibit* control pin. The actual turn-on time will vary with the input voltage, output load, and the total amount of capacitance connected to the output. Using the circuit of Figure 2-1, Figure 2-2 shows the typical output voltage and input current waveforms of a PT4472 after  $Q_1$  is turned on. The turn on of  $Q_1$  correlates to the fall in  $V_{\rm inh}$ . The output voltage was set to 2.5V. The waveform was measured with a 48-Vdc input voltage, and 15-A load current.

Figure 2-2



# **IMPORTANT NOTICE**

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

**Applications Products Amplifiers** amplifier.ti.com Audio www.ti.com/audio Data Converters Automotive www.ti.com/automotive dataconverter.ti.com DLP® Products Broadband www.dlp.com www.ti.com/broadband DSP Digital Control dsp.ti.com www.ti.com/digitalcontrol Clocks and Timers www.ti.com/clocks Medical www.ti.com/medical Military Interface www.ti.com/military interface.ti.com Optical Networking Logic logic.ti.com www.ti.com/opticalnetwork Power Mgmt power.ti.com Security www.ti.com/security Telephony Microcontrollers microcontroller.ti.com www.ti.com/telephony Video & Imaging www.ti-rfid.com www.ti.com/video RF/IF and ZigBee® Solutions www.ti.com/lprf Wireless www.ti.com/wireless

> Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2009, Texas Instruments Incorporated