

PortServer[®] TS H MEI

Hardened Serial Servers

High-performance RS-232/422/485 serial-to-Ethernet connectivity for locations requiring extended temperature tolerance.



Overview

PortServer TS H MEI is designed for utility plants, pipelines, traffic management facilities, and other remote applications requiring a hardened serial-to-Ethernet solution that can withstand extreme temperatures. It is ideal for network-enabling and remotely managing variable message signs, loop detectors, ramp meters or any RS-232/422/485 serial device.

Digi's patented RealPort[®], with encryption and user authentication*, makes it possible to establish a connection between the host and networked serial device by creating a local COM or TTY port on the host computer, allowing software applications to work with networked device servers instead of requiring a host adapter.

PortServer TS H MEI also delivers data security via SSHv2, port buffering, full SNMP device management and industry leading low latency.

*RealPort's encryption feature is compatible with AIX, HP UX, Linux, Windows XP, Windows 2000, Windows Server 2003, SCO OpenServer and Solaris. RealPort's authentication feature is compatible only with Windows XP, Windows 2000 and Windows Server 2003.

Target Applications



Utilities




Traffic Management



Industrial Automation

Application Highlight

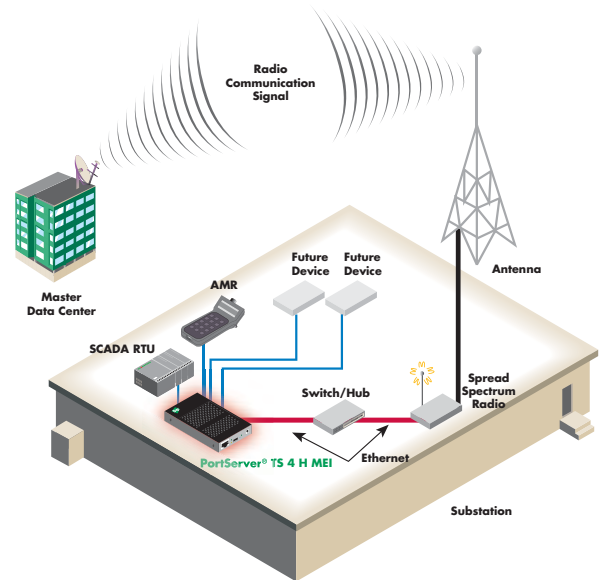

Features/Benefits

- Robust, hardened model with extended temperature tolerance (-35° C to +74° C)
- 1, 2 or 4 RS-232/422/485 switch-selectable serial ports
- Patented RealPort for COM/TTY port control and management
- Monitoring and diagnostic utility
- Data security via SSHv2 and SSL/TLS
- Easy configuration through web interface (HTTP/HTTPS)
- Tunable for low latency or optimized for throughput
- Locking barrel power connector



Specifications


PortServer® TS 1 H MEI

PortServer® TS 2 H MEI


PortServer® TS 4 H MEI

Features				
Management	HTTP/HTTPS, CLI, SNMP (read/write), Digi Port Authority - Remote management diagnostics and auto-discovery tool			
Protocols	UDP/TCP, DHCP/RARP/ARP-Ping for IP Address assignment, Extended Telnet RFC 2217, Telnet, Reverse Telnet, Modbus to Modbus/TCP protocol conversion support, PPP			
Security	SSHv2, SSL/TLS			
Software	Patented device-initiated RealPort® COM port redirector			
Status LEDs	Link, Activity, Power, Status			
Operating Systems	AIX, HP-UX, Linux®, SCO® OpenServer™ 5, SCO® OpenServer™ 6, Solaris™ Intel, Solaris™ SPARC, Windows XP®, Windows Server® 2003, Windows Server® 2008, Windows Vista®; Note: TCP/UDP Socket Services are operating system independent			
Dimensions (L x W x D)	5.25 in x 3.33 in x 0.95 in (13.34 cm x 8.46 cm x 2.42 cm)			
Weight	2.25 oz (64.00 g)			
Other	Full modem and hardware flow control, Modem emulation, Port buffering, RJ-45/DB-9F crossover cable included for optional serial configuration, Wall mount kit included			
Interfaces				
Serial				
Ports	<table border="1"> <tr> <td>1 RS-232/422/485 RJ-45; Up to 230 Kbps throughput; Signal support for TXD, RXD, RTS, CTS, DTR, DSR, DCD</td> <td>2 RS-232/422/485 RJ-45; Up to 230 Kbps throughput; Signal support for TXD, RXD, RTS, CTS, DTR, DSR, DCD</td> <td>4 RS-232/422/485 RJ-45; Up to 230 Kbps throughput; Signal support for TXD, RXD, RTS, CTS, DTR, DSR, DCD</td> </tr> </table>	1 RS-232/422/485 RJ-45; Up to 230 Kbps throughput; Signal support for TXD, RXD, RTS, CTS, DTR, DSR, DCD	2 RS-232/422/485 RJ-45; Up to 230 Kbps throughput; Signal support for TXD, RXD, RTS, CTS, DTR, DSR, DCD	4 RS-232/422/485 RJ-45; Up to 230 Kbps throughput; Signal support for TXD, RXD, RTS, CTS, DTR, DSR, DCD
1 RS-232/422/485 RJ-45; Up to 230 Kbps throughput; Signal support for TXD, RXD, RTS, CTS, DTR, DSR, DCD	2 RS-232/422/485 RJ-45; Up to 230 Kbps throughput; Signal support for TXD, RXD, RTS, CTS, DTR, DSR, DCD	4 RS-232/422/485 RJ-45; Up to 230 Kbps throughput; Signal support for TXD, RXD, RTS, CTS, DTR, DSR, DCD		
Ethernet				
Ports	1 RJ-45 10/100 Mbps 10/100Base-T (auto-sensing); Full or half duplex			
Power Requirements				
Power Input	9-30VDC			
Power Supply	12VDC extended temperature power supply sold separately; Bare-wire "pigtail" power connector included			
Power Consumption	Typical: 4 W; Max: 6 W			
Surge Protection	4 kV burst (EFT) per EN61000-4-4, 2 kV surge per EN61000-4-5			
Environmental				
Operating Temperature	-35° C to +74° C (-31° F to 165° F)			
Storage Temperature	-40° C to +85° C (-40° F to -185° F)			
Relative Humidity	5% to 95% (non-condensing)			
Ethernet Isolation	1500VAC min per IEEE802.3/ANSI X3.263			
Serial Port Protection (ESD)	+15 kV air 6 AP and +8 kV contact discharge per IEC 100-4-2			
Approvals				
Safety	UL/CUL60950, IEC60950, CB			
Emissions/Immunity	CE, FCC Part 15 (Class A), EN55024, EN55022 Class A, AS/NZS 3548, VCCI V-3/99 .05			

PortServer TS H MEI - Front



PortServer TS H MEI - Back



Visit www.digi.com for part numbers.

DIGI SERVICE AND SUPPORT - You can purchase with confidence knowing that Digi is here to support you with expert technical support and a strong five-year warranty. www.digi.com/support

Digi International
877-912-3444
952-912-3444
info@digi.com

Digi International France
+33-1-55-61-98-98
www.digi.fr

Digi International KK
+81-3-5428-0261
www.digi-intl.co.jp

Digi International (HK) Limited
+852-2833-1008
www.digi.cn

BUY ONLINE • www.digi.com

91001210
F1/909

© 2003-2009 Digi International Inc. All rights reserved. Digi, Digi International, the Digi logo, PortServer and RealPort are trademarks or registered trademarks of Digi International Inc. in the United States and other countries worldwide. All other trademarks are the property of their respective owners.

