



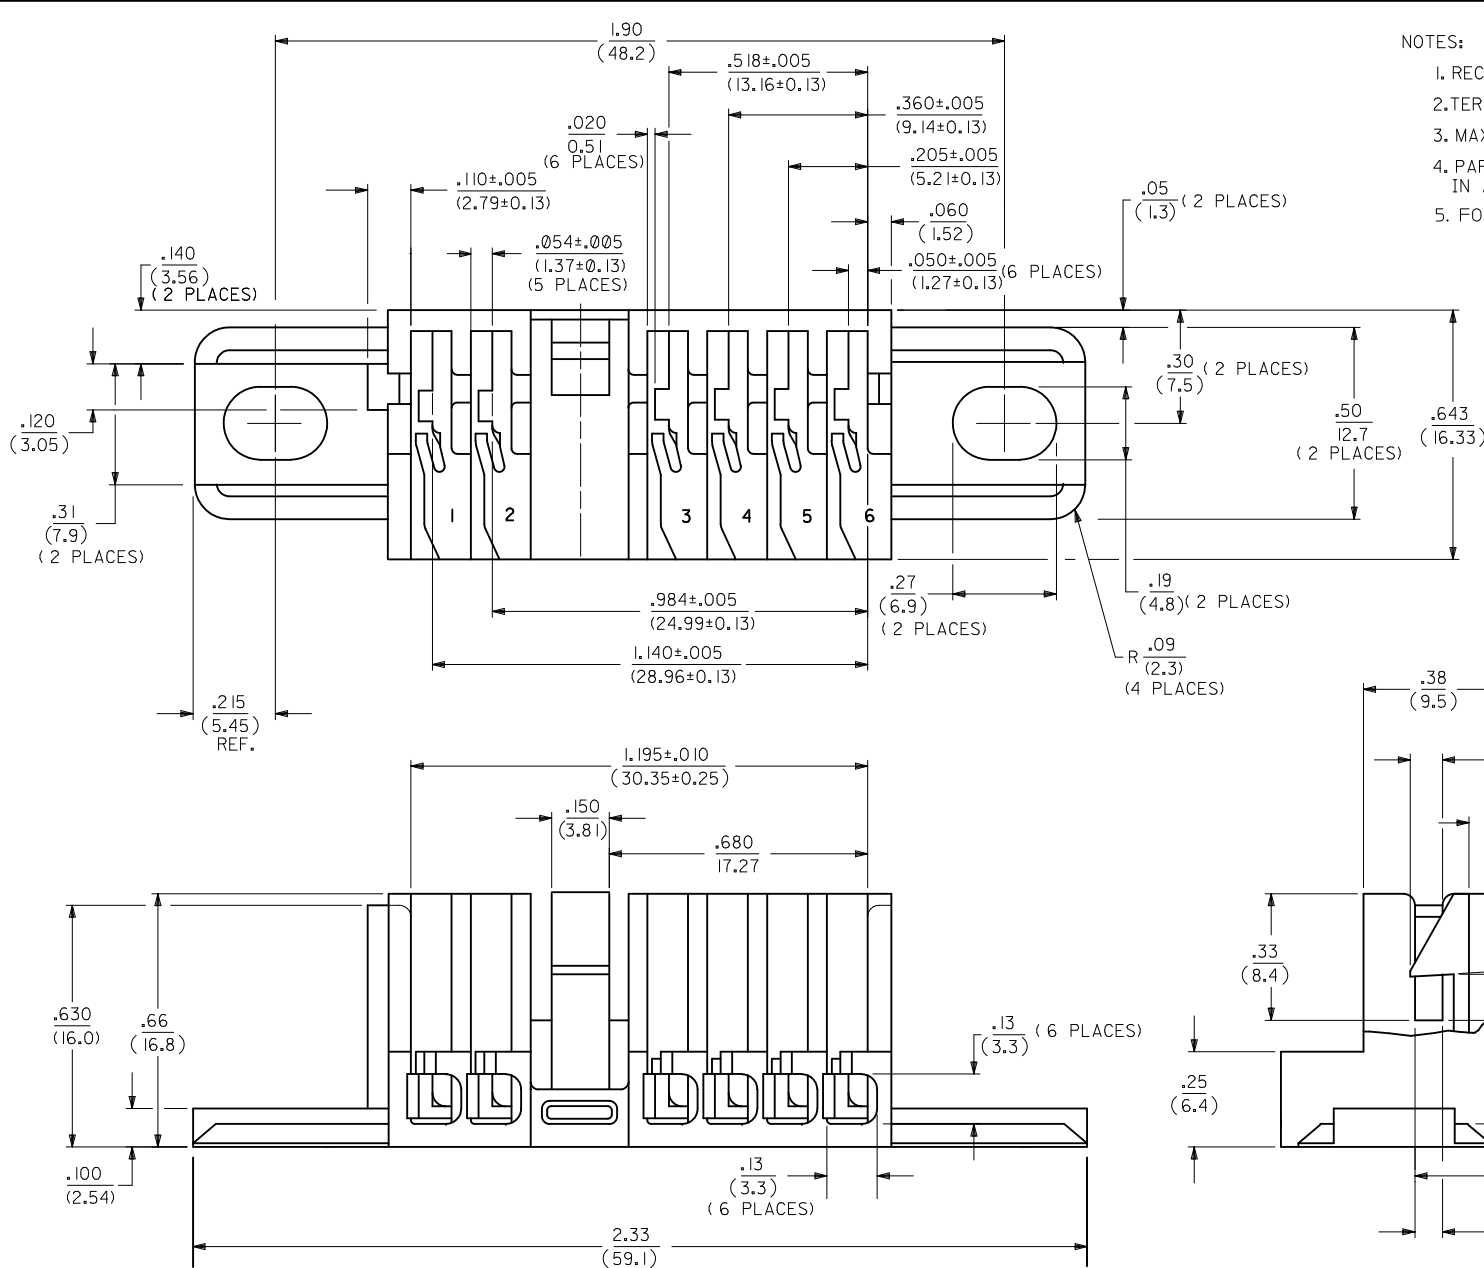

NOTES:

1. RECOMMENDED BOARD THICKNESS (1.60±0.13)/.063±.005.
2. TERMINAL USED, MOLEX 08-(30 THRU 35)-*.
3. MAXIMUM WIRE SIZE-18 AWG WITH (0.8)/.03 INSULATION.
4. PARTS TO BE MOISTURIZED AND SEALED IN A PLASTIC BAG.
5. FOR PACKAGING INFORMATION: SEE PK-42242-001.

MATERIAL: NYLON, TYPE 6/6, 94V-2

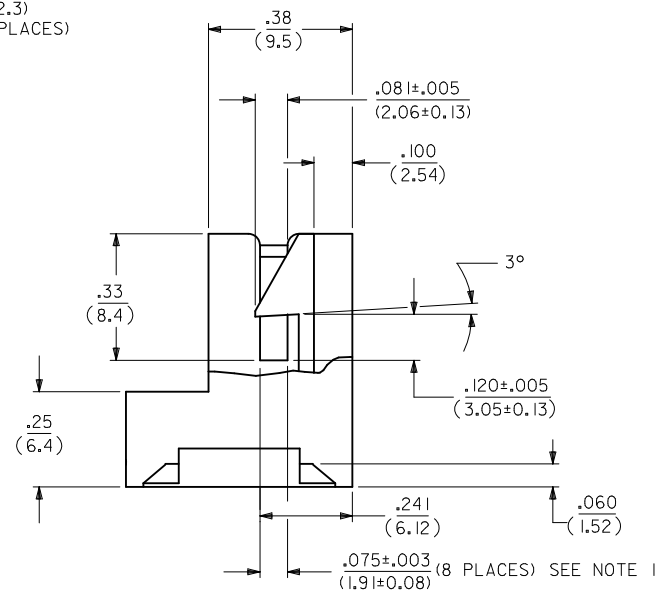

ADD PKG SPECS EC NO: UCP2012-3608 DRAWN: AELHAG 2012/05/04 CHKD: JIBELL 2012/05/04 APPR: FSMITH 2012/05/29	DESCRIPTION	QUALITY SYMBOLS F=0 E=0 F=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 4:1	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION		
			mm	INCH	DRAWN BY ES	DATE 1989/02/07	TITLE HOUSING (RIGHT ANGLE P.C. BOARD)				
			4 PLACES ± --- ± ---	CHECKED BY GF	DATE 1989/02/07						
			3 PLACES ± --- ± .010	APPROVED BY		DATE					
			2 PLACES ± 0.25 ± .014	MATERIAL NO.		DOCUMENT NO.					SHEET NO.
			1 PLACE ± 0.36 ± ---	009-02-7061		SD-42242-1000					1 OF 1
			0 PLACE ± ±	ANGULAR ±1/2°							
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS								
			SIZE C				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				