

10

9

8

7

6

5

4

3

2



1

注記:

NOTES:

1. 適合リセプタクルハウジング: 3191-04R*
TO BE MATED WITH RECEPTACLE HOUSING :
3191-04R*

2. ASSEMBLIES MAY CONTAIN SOLID OR SWAGED (HOLLOW) PINS.

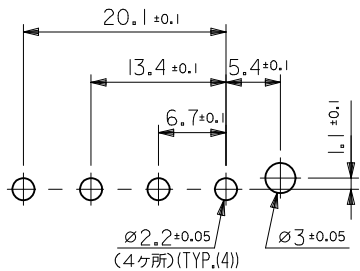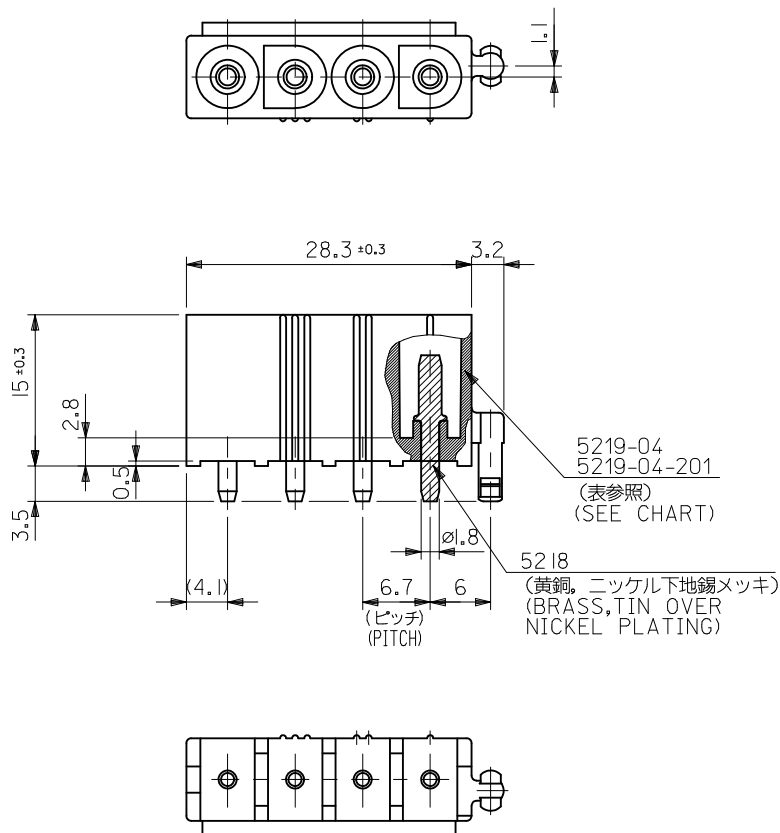

基板取付穴推奨寸法

RECOMMENDED P.C. BOARD HOLE DIMENSIONS

5219-04A-201	39-28-7048	NYLON66,94V-0
5219-04A	15-31-1046	NYLON66,94V-2
ENG. NO.	EDP NO.	ハウジングの材質 MATERIAL

ADD NOTE 2 EC NO: UCP2012-0046 DRWN: AELHAG 2011/07/08 CHKD: JBELL 2011/07/15 APPR: FSMITH 2011/09/02	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 2:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION
		10 UNDER	± 0.2	DRAWN BY K. KOHAMA	DATE '00/05/29	TITLE NEW INTERNATIONAL CONN 4 POS. HEADER		
		10 OVER 30 UNDER	± 0.25	CHECKED BY M. FUKUSHIMA	DATE '00/05/29			
		30 OVER	± 0.3	APPROVED BY M. FUKUSHIMA	DATE '00/05/29			
			ANGULAR ±3 °	MATERIAL NO.		DOCUMENT NO.		SHEET NO.
N	REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-5219-003		1 OF 1
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

9

8

7

6

5



4

3

2

10 9 8 7 6 5 4 3 2 1

CIRCUITS	EDP NO.	ENGINEERING NO.
4	15-31-1046	5219-04A


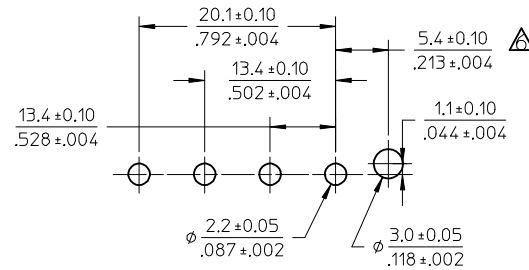



RECOMMENDED P.C.B. HOLE DIM.

NOTES:

- 1) MATERIAL:
HOUSING: NYLON 6/6, UL94V-2, COLOR: NATURAL
TERMINAL: C2700W BRASS
- 2) FINISH: 0.000003/(.0000001) MIN. TIN OVERALL OVER
0.000001/(.00000004) MIN. NICKEL OVERALL
- 3) PRODUCT SPECIFICATION: NONE
- 4) PACKAGING: PK-5219-002
- 5) MATES WITH: 3191-04R SERIES

- 6) DIFFERENCE OF DIMENSION IS INTENTIONAL TO PREVENT PART RISING FROM P.C.B.
- 7) PARTS CONFORM TO CLASS 'B' REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.
- 8) ASSEMBLIES MAY CONTAIN SOLID OR SWAGED (HOLLOW) PINS.

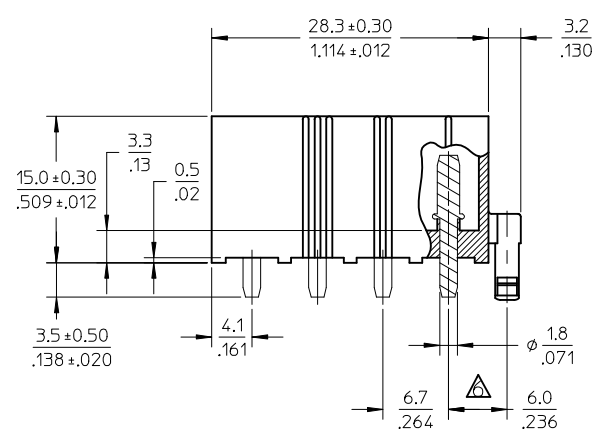

ADD PKG SPECS EC NO: UCP2013-4695 2013/04/30 DRW:AEHLHAG CHKD:JBELL APPR:FSM/TH 2013/05/13	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ◻=0	GENERAL TOLERANCES (UNLESS SPECIFIED) <table><tr><td></td><td>mm</td><td>INCH</td></tr><tr><td>4 PLACES</td><td>± ---</td><td>± ---</td></tr><tr><td>3 PLACES</td><td>± ---</td><td>± .005</td></tr><tr><td>2 PLACES</td><td>± .013</td><td>± .010</td></tr><tr><td>1 PLACE</td><td>± .025</td><td>± ---</td></tr><tr><td colspan="3">ANGULAR ± 1 °</td></tr></table>		mm	INCH	4 PLACES	± ---	± ---	3 PLACES	± ---	± .005	2 PLACES	± .013	± .010	1 PLACE	± .025	± ---	ANGULAR ± 1 °			DIMENSION STYLE IN/MM		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
					mm	INCH																				
				4 PLACES	± ---	± ---																				
				3 PLACES	± ---	± .005																				
				2 PLACES	± .013	± .010																				
1 PLACE	± .025	± ---																								
ANGULAR ± 1 °																										
DRAWN BY A.ASO		DATE 1979/04/08		TITLE NEW INTERNATIONAL CONN. HEADER AND ASSY																						
CHECKED BY MENOMOTO		DATE 1979/04/10																								
APPROVED BY		DATE		MOLEX INCORPORATED																						
MATERIAL NO. 15-31-1046		DOCUMENT NO. SD-5219-04A*					SHEET NO. 1 OF 1																			
K3		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																							

9 8 7 6 5 4 3 2 1