

5

4

3

2

1

F



E

D




C

B

A

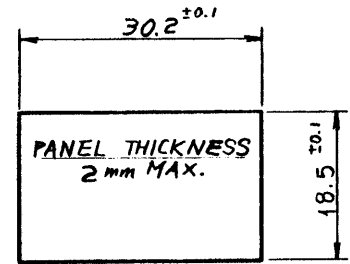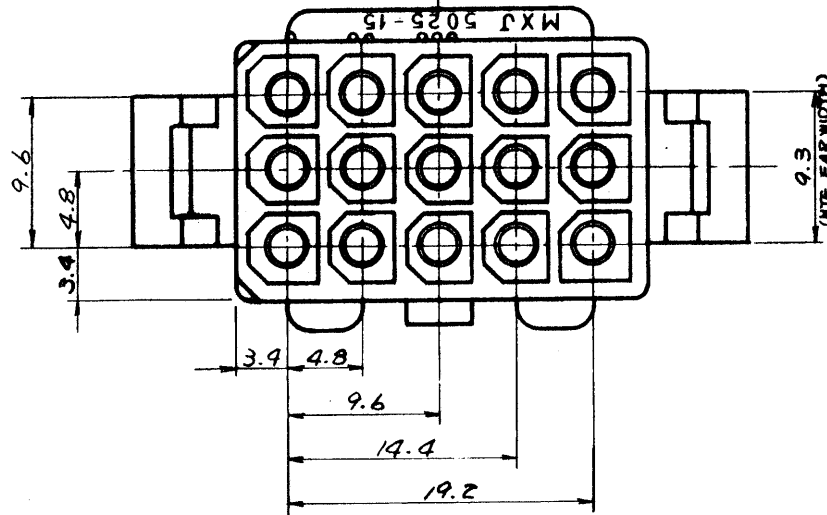

MOUNTING HOLE DETAIL
(SCALE 1:1)

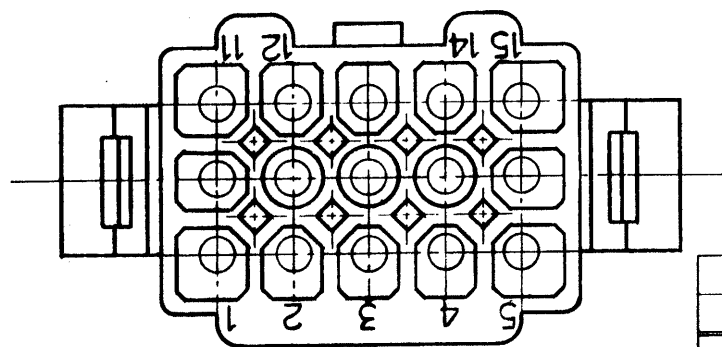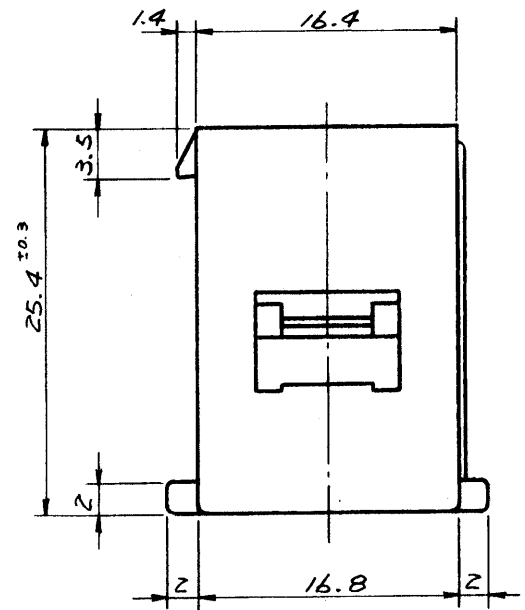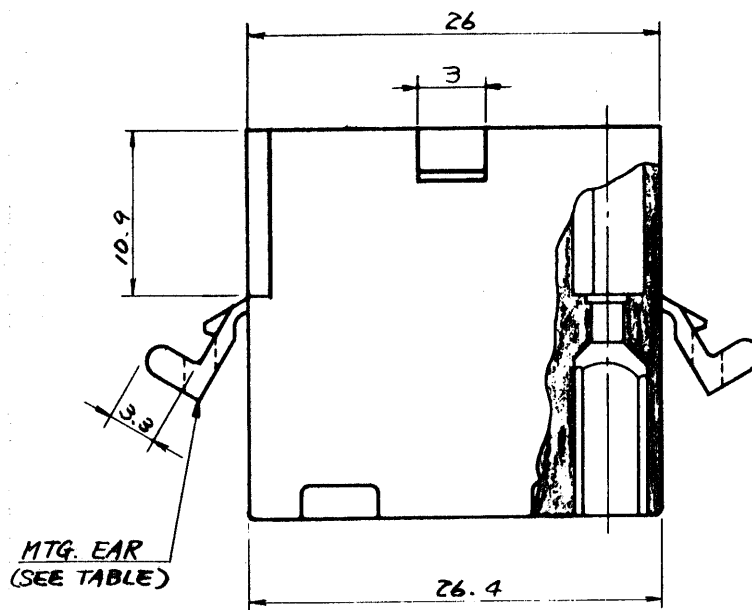

GENERAL TOLERANCES

10 UNDER	±0.2
10 OVER 30 UNDER	±0.25
30 OVER	±0.3
ANGLE	±3°

	5025-15P1	NO
	5025-15P	YES
EDP NO.	ENG. NO.	MTG. EAR

					公差 (Tolerances)	所要数 (Req)	DRWG. <i>Y. Awano</i> 9/30/77
					.000 → ±0.005 .00 → ±0.05		DSN'D <i>M. Bando</i> 10/10/77
					.0 → ±0.1 . → ±0.3		CHK'D <i>16 Shin</i>
					材料 (MAT'L)	女	APP'D
					NYLON 66, 94V-2		molex MOLEX-JAPAN CO., LTD. 日本モレックス株式会社
					熱処理 (H.T.)		
					HRc #		
D	ADDED -15P1 ECN NO. 917	9/5/77	<i>44</i>		仕上げ (Finish)	No.	REV.
C	REMOVED "X" ECN NO. 748	9/10/77	<i>44</i>		#	SD - 5025-15P*	D
B	リブ, ハテルスロットカーキット NO.	12/6/77	<i>44</i>		Scale 2/1	名称 (Name)	MINI. FIT CONN. 15POS. PLUG HSG.
A	REVISED	10/20/77	<i>44</i>				
O	PROPOSED	9/30/77	<i>44</i>				
記号 LTR	変更内容 (Rev.)	Date	Name				

5

4

3

2

1

F



E

D




C

B

A

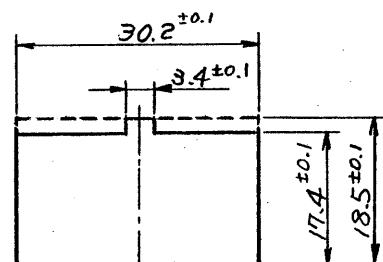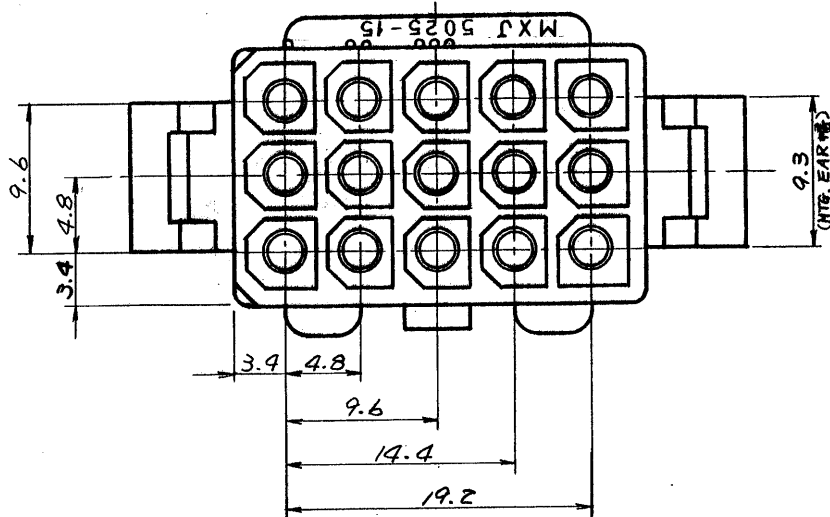

パネル板厚 2mm MAX

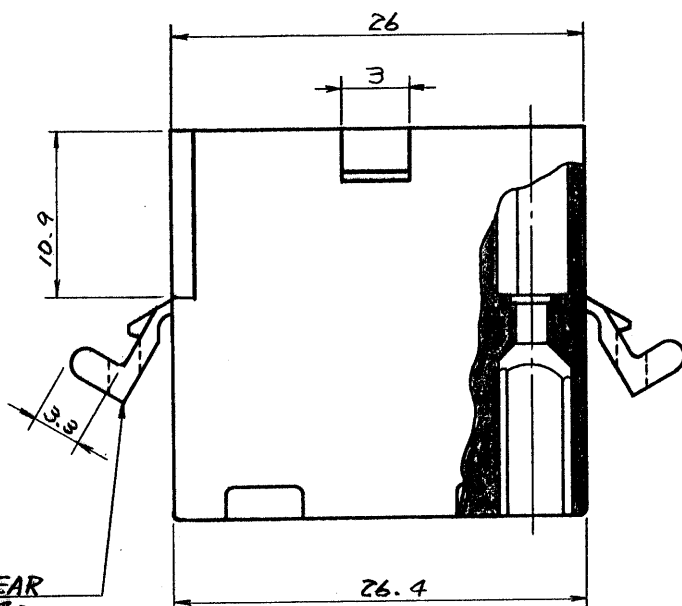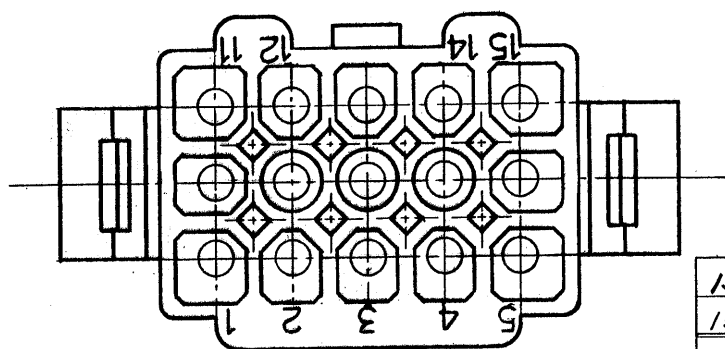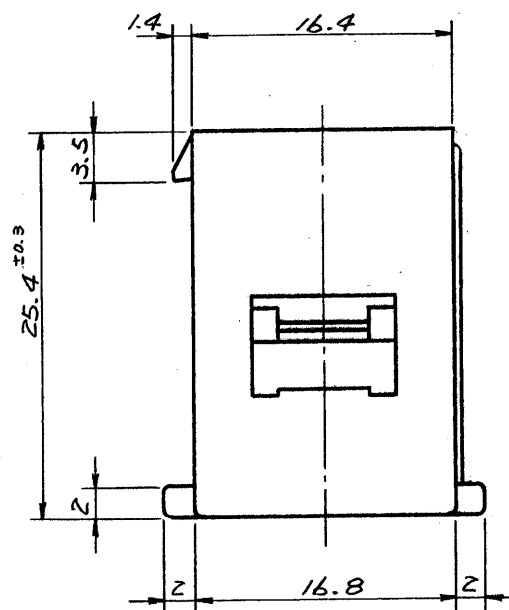パネルスロット寸法
(SCALE 1:1)MTG. EAR
(表参照)

一般公差

10未満	±0.2
10以上30未満	±0.25
30以上	±0.3
角度	±3°

15-31-1153	5025-15P1	無
15-31-1151	5025-15P	有
EDP NO.	ENG. NO.	MTG. EAR

				公差 (Tolerances)	所要数 (Req)	DRWG. <i>Y. Awano</i> 9/30/77
				.000 → ±0.005 .00 → ±0.05		DSN'D <i>M. ENO</i> 10/14/77
				.0 → ±0.1 . → ±0.3		CHK'D <i>K. Sano</i>
				材料 (MAT'L)	☆	APP'D <i>WMS</i>
E	REVISED	ECN NO. 1499	11/30/79	NYLON 66, 94V-2		molex MOLEX-JAPAN CO., LTD. 日本モレックス株式会社
D	ADDED -15P1	ECN NO. 917	9/5/78	熱処理 (H.T.)		
C	REMOVED "X"	ECN NO. 748	3/8/78	HRc ———		
B	リット, パネルスロットサキット NO.		12/4/77	仕上げ (Finish)		
A	REVISED		10/28/77	———		
O	PROPOSED		9/30/77	Scale <i>2/1</i>	No. SD-5025-15P*	REV. E
記号 (LTR)	変更内容 (Rev.)	Date	Name	名称 (Name)	MINI. FIT CONN. 15POS. PLUG HSG.	