

SPECIFICATIONS




Model Number: MX3B1

Part Number: 028421

October 12, 2005

Mechanical Drawing:

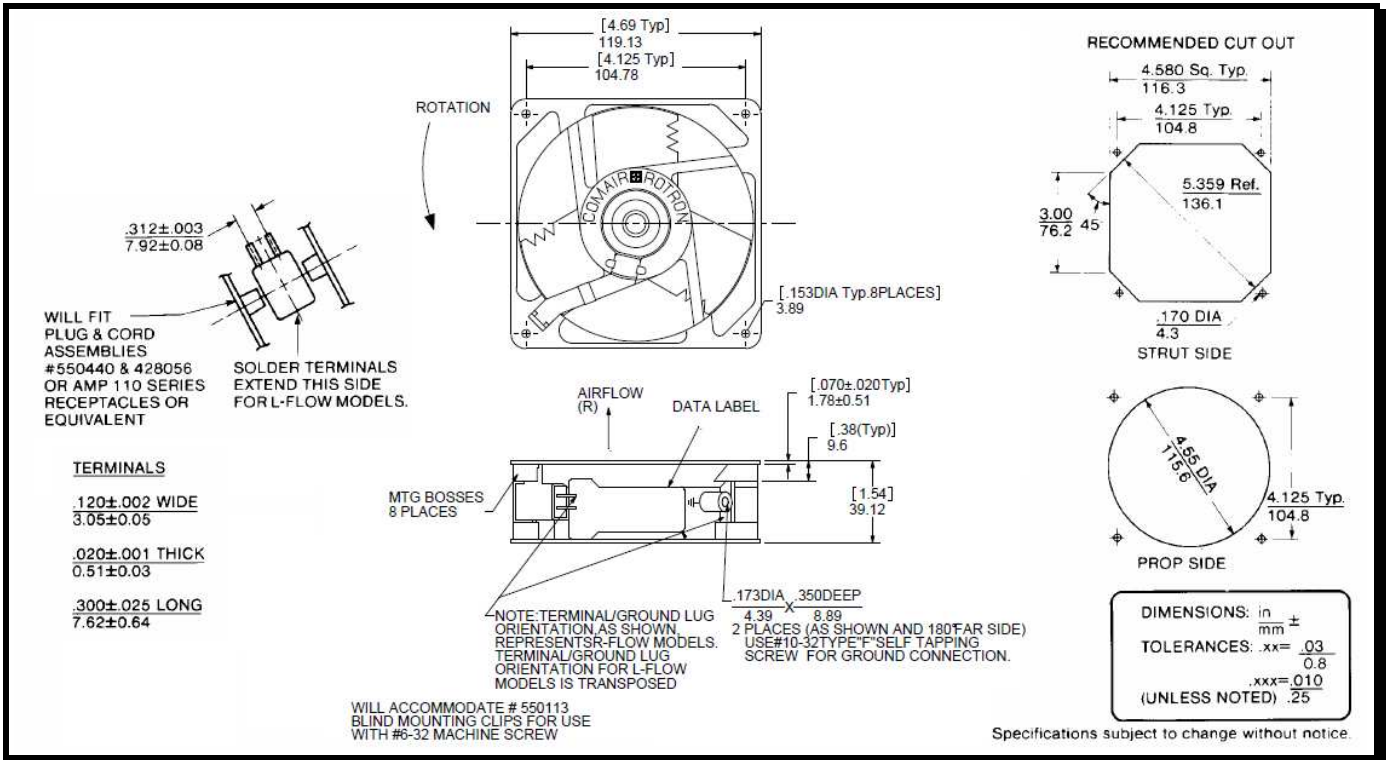

Motor:

Nominal Voltage	= 220/230 VAC
Frequency	= 50/60 Hz
Nominal Running Current	= 0.100 / 0.090 amps
Locked Rotor Current	= 0.145 amps
Running Power	= 17.0 / 16.0 watts
Average Speed	= 2700 / 3100 RPM
Bearings	= Ball
Air Flow	= 92 / 108 CFM
Acoustic	= 43.4 / 51.0 dBA

Construction:

Venturi: Zinc Alloy, Black.
Propeller: Plastic, Black, UL 94V-0

Life Expectancy:

This fan is designed for continuous duty life of 55,000 hours at 40°C.

Additional Features:

Shaded pole induction motor
Automatic Restart Capability
Impedance Protection
Feather Edge Propeller
Operating Temperature: -10°C to 70°C
Storage Temperature: -40°C to 85°C

Termination:

2 Terminals

Agency Approvals:

UL, CSA, VDE, CE