

INTERCONNECTS

SERIES 350, 450, 801, 803 • 2,54 GRID (0,64 DIA. PINS), LOW PROFILE HEADERS & VERSATILE SOCKETS • SINGLE & DOUBLE ROW STRIPS




FIG. 1




FIG. 2

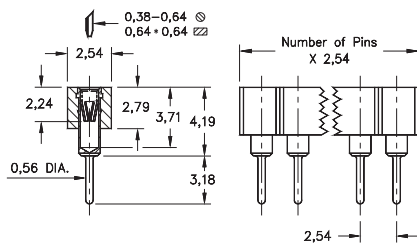


FIG. 3

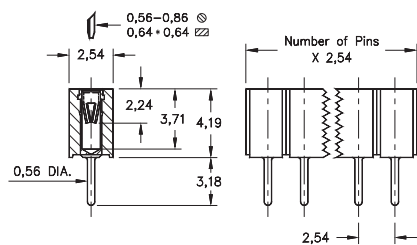


FIG. 4

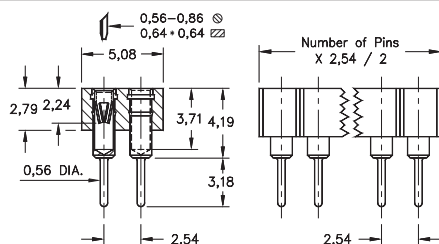


FIG. 5

- Series 350 and 450 single and double row pin headers use MM #0290 pins. See page 215 for details
- Series 801 and 803 single and double row low profile sockets use MM #1303 receptacles. See page 180 for details
- Series 801 and 803 receptacles use Hi-Rel, 6-finger BeCu #16 contact rated at 4.5 amps. Receptacles accept 0,64 diameter and 0,64 square pins. See page 256 for details
- Insulators are high temperature thermoplastic, suitable for all soldering operations



ORDERING INFORMATION

FIG. 1	Series 350...001		Single Row 0,64 Pin / 0,46 Solder Tail	
	350-XX-1-00-001000 Specify number of pins 01-64			
FIG. 2	Series 450...001		Double Row 0,64 Pin / 0,46 Solder Tail	
	450-XX-2-00-001000 Specify number of pins 02-64			
RoHS-2 2011/65/EU XX=Plating Code See Below For Electrical, Mechanical & Environmental Data, See page 264				
SPECIFY PLATING CODE XX=		10	90	40
Pin Plating 		0,25µm Au	5,08µm Sn/Pb	5,08µm Sn

FIG. 3	Series 801...003		Low Profile Socket (short insulator)		
	801-XX-0-10-003000 Specify number of pins 01-64				
FIG. 4	Series 801...013		Low Profile Socket (long insulator)		
	801-XX-0-10-013000 Specify number of pins 01-36				
FIG. 5	Series 803...003		Double Row Low Profile Socket		
	803-XX-0-10-003000 Specify number of pins 02-72				
RoHS-2 2011/65/EU XX=Plating Code See Below For Electrical, Mechanical & Enviromental Data, See page 264					
SPECIFY PLATING CODE XX=				41	43
Sleeve (Pin) 				5,08µm Sn	5,08µm Sn
Contact (Clip) 				0,25µm Au	0,76µm Au

