


HONEYWELL
PART NUMBER

11SM727

PRODUCT CODE

TWY2026

REV	DOCUMENT	CHANGED BY	CHECK
4	0038444	KVS 09APR08	ASD

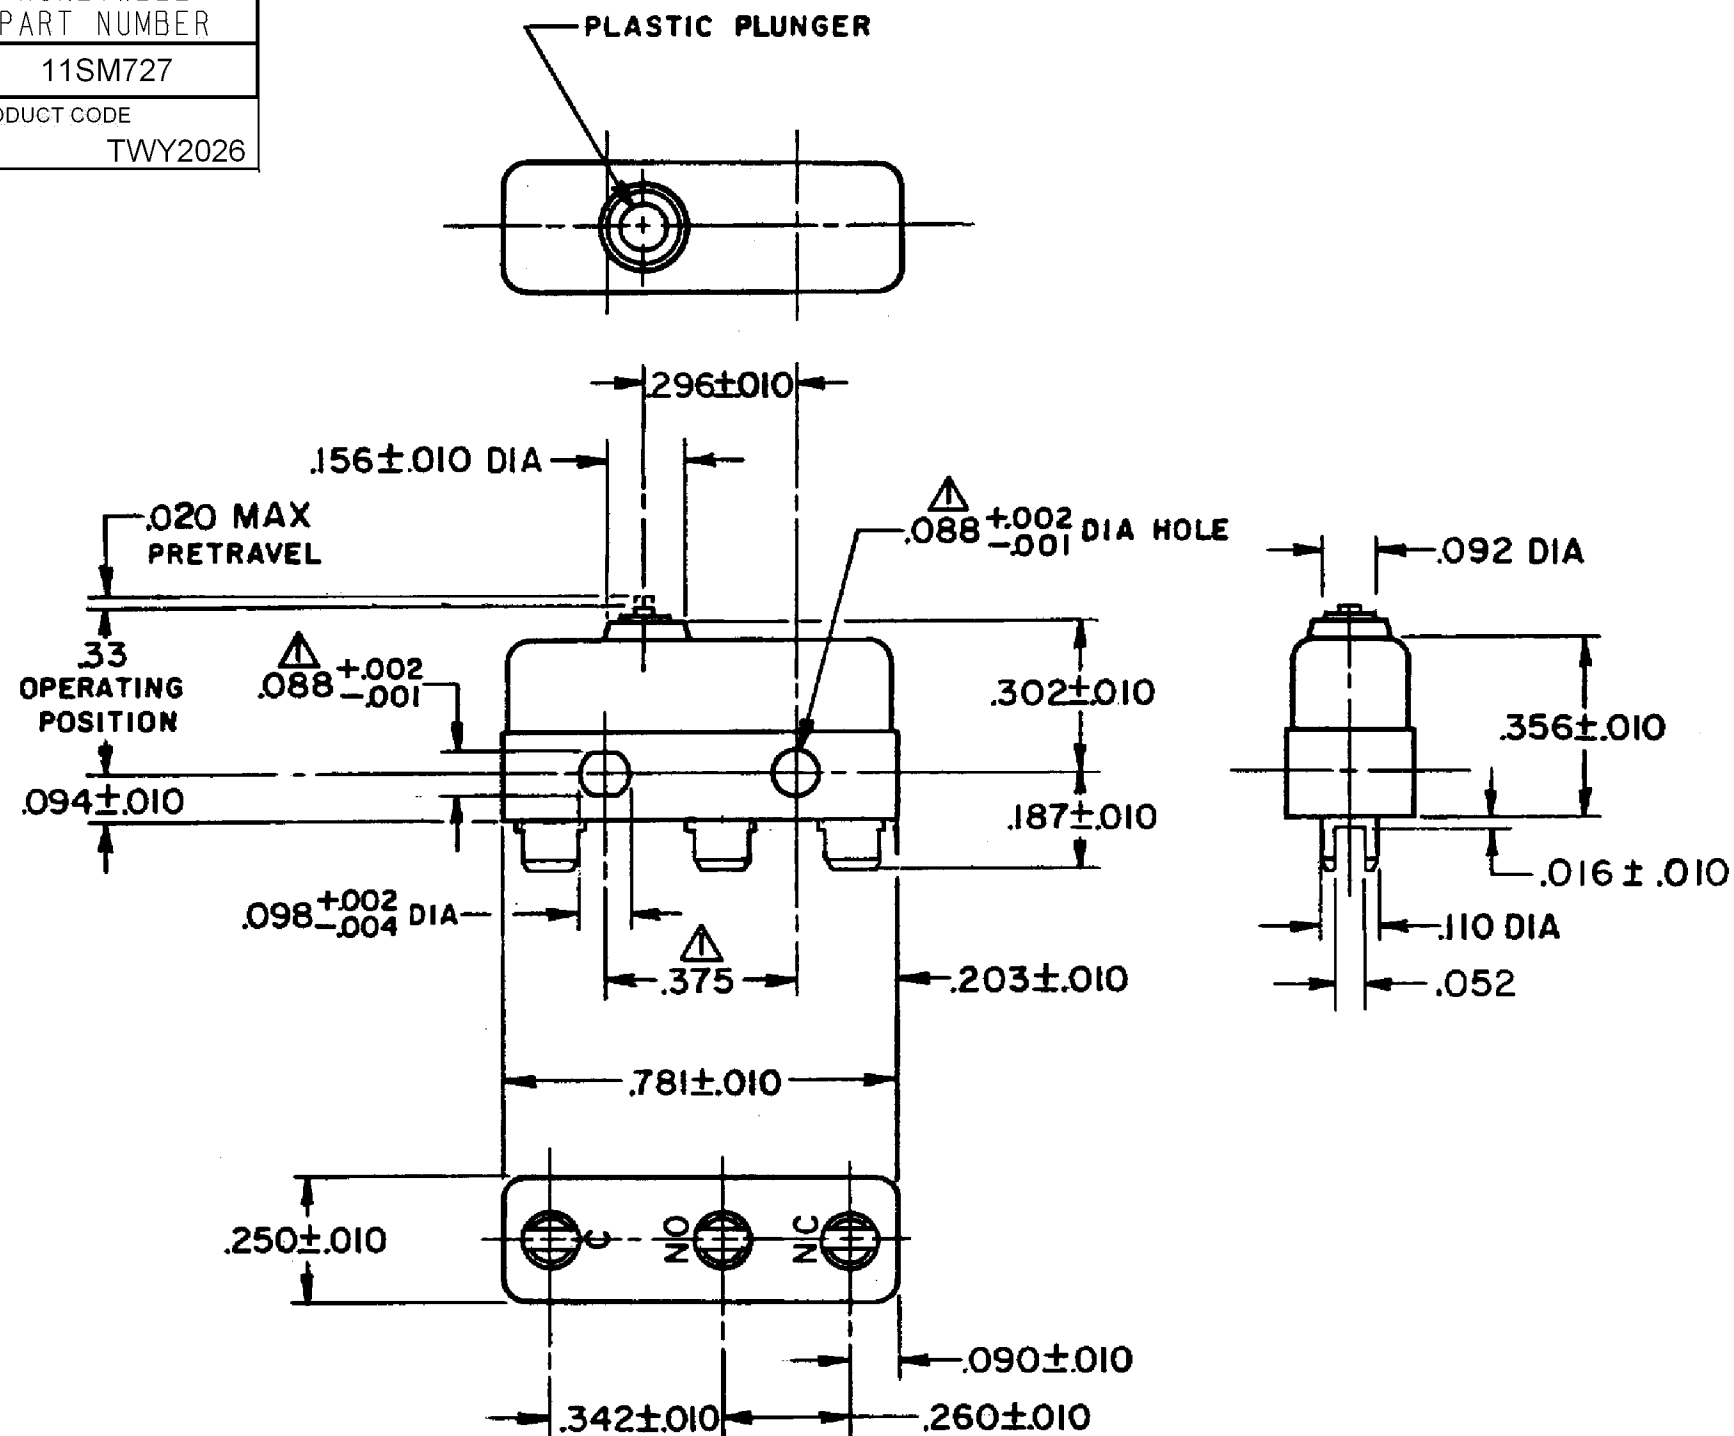

NOTES

- △ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375±.002 CENTERS
- 2 - TERMINALS ARE PLATED FOR SOLDERING

RELEASE NO.	PR-14758
REPLACES	X84437-SM

CHARACTERISTICS

OPERATING FORCE -- 56 GRAM MAX

RELEASE FORCE-- -- 14 GRAM MIN

DIFFERENTIAL TRAVEL-- -- .002 MAX

OVERTRAVEL-- -- -- .005 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SPDT

30 VOLTS DC RATING

	SEA LEVEL	50,000 FT
INDUCTIVE	3 AMP	2.5 AMP
RESISTIVE	5 AMP	5 AMP

MAXIMUM INRUSH 24 AMP

APPROVALS	UL, CSA	4A, 250 VAC	UL	CS	BRAND	L119
-----------	---------	-------------	----	----	-------	------

DESIGN UNITS: INCH

TOLERANCES UNLESS NOTED:

NO PLACE	X	±
ONE PLACE	.X	±
TWO PLACE	.XX	±
THREE PLACE	.XXX	±
FOUR PLACE	.XXXX	±
ANGLES		±

THIRD ANGLE PROJECTION



DRAWN	VK	13FEB 08
CHECK	RJ	13FEB 08

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.

INTERPRET PER ANSI Y14.5M-1982
OTHER HONEYWELL ENGINEERING
STANDARDS MAY APPLY

RASTER

Honeywell

TITLE

SWITCH - BASIC

SIZE	TYPE	DRAWING NAME	REV
B	I	11SM727	4
SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1