
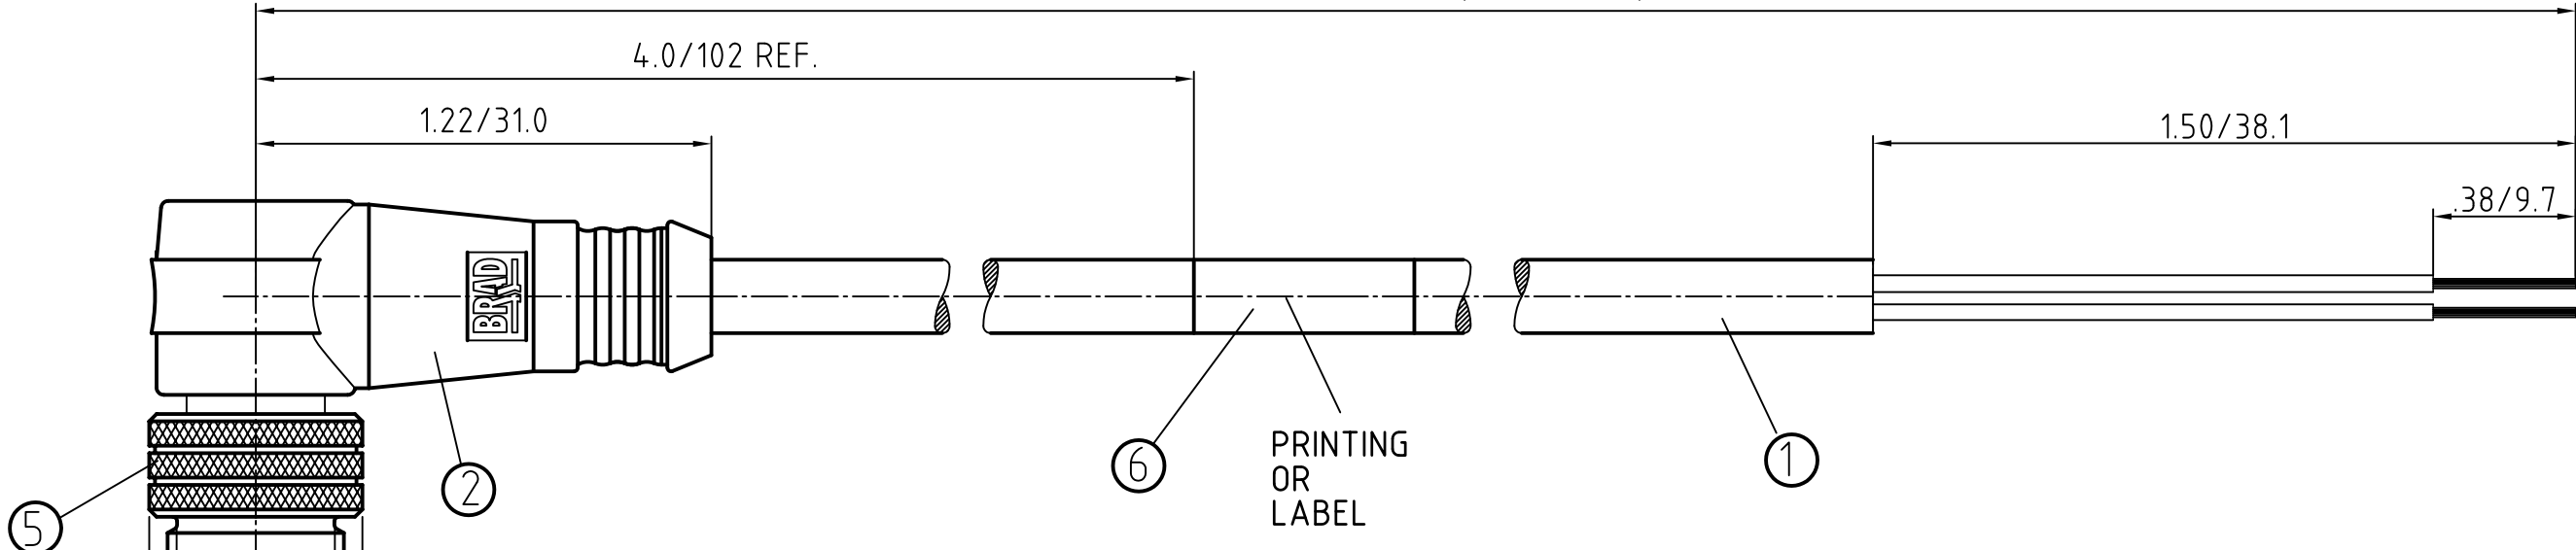
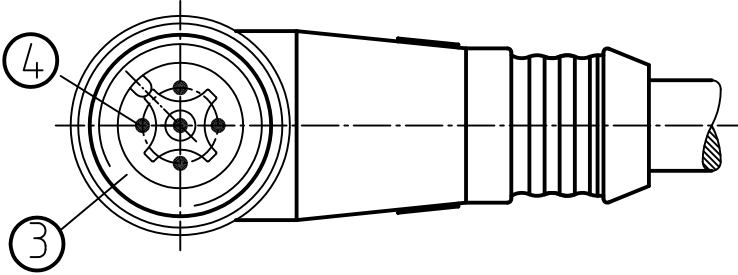
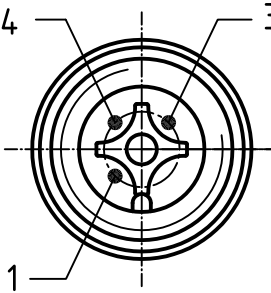
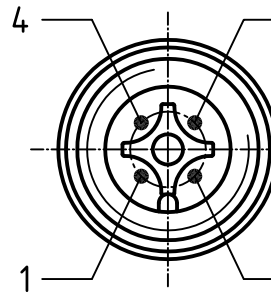


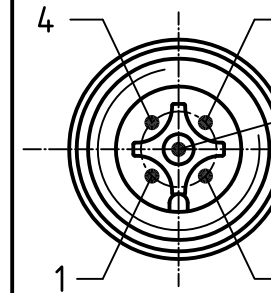

F
E
D
C
B
A

10	9	8	7	6	5	4	3	2	1
FINISHED LENGTH (SEE TABLE)									
									
									
CONNECTOR SPECIFICATION:									
VOLTAGE RATING		250 VAC/VDC							
AMPERAGE RATING		max. 4 AMPS							
PROTECTION		IP67							
OPERATING TEMPERATURE		-20°C TO 105°C							
UL CERTIFICATIONS		UL RECOGNIZED, FILE NO. E152210							
ASSEMBLY IS		RoHS COMPLIANT							
ITEM	COMPONENT	MATERIAL	FINISH						
6	LABLE	MYLAR	BLACK/YELLOW						
5	COUPLER	BRASS	NICKEL PLATED						
4	PIN CONTACT	COPPER ALLOY	GOLD OVER NICKEL						
3	INSERT	NYLON	BLACK						
2	OVERMOLD	POLYURETHANE (PUR)	YELLOW						
1	CABLE- 22/3-5 (COPPER STRANDING) 3/4/5 CONDUCT. 300V	JACKET: PVC	JACKET: YELLOW						

PRINTING
OR
LABEL

MALE FACE VIEW		
3-POLE	4-POLE	5-POLE
		
WIRING DIAGRAM		
1 BROWN 3 BLUE 4 BLACK	1 BROWN 2 WHITE 3 BLUE 4 BLACK	1 BROWN 2 WHITE 3 BLUE 4 BLACK 5 GREY

DESCRIPTION EC NO: WEU2010-0261 DRWN: LSTEMMLE 2010/01/13 CHKD: RE APPR: NSTAUDIG 2010/01/25	QUALITY SYMBOLS <div>▽ = 0</div> <div>▽C = 0</div>	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE 2:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION			
		4 PLACES 3 PLACES 2 PLACES 1 PLACE	mm	INCH	DRAWN BY ----		MICRO-CHANGE CORDSET 3/4/5-P. M 90 SINGLE KEY 22/3-5 YELLOW PVC CABLE					
			±---	±---	DATE ----							
			±---	±---	CHECKED BY RE							
			±---	±.01	DATE 2010/01/14		MOLEX INCORPORATED					
			±0.3	±---	APPROVED BY NSTAUDIG							
		ANGULAR ± --- °			DATE 2010/01/25							
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			MATERIAL NO. SEE TABLE SHEET 2		DOCUMENT NO. SD-120065-029			SHEET NO. 1 OF 1		
					SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

F

E

D

C

B

A

F

E

D

C

B

A

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
3	1200651497	803007A09M020	6.56' +3.5" -0 [2.0M +89 -0]

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
4	1200651662	804007A09M020	6.56' +3.5" -0 [2.0M +89 -0]
4	1200651665	804007A09M040	13.12' +6.5" -0 [4.0M +165 -0]
4	1200651666	804007A09M050	16.40' +6.5" -0 [5.0M +165 -0]
4	1200651668	804007A09M060	19.69' +6.5" -0 [6.0M +165 -0]
4	1200651669	804007A09M100	32.81' +12.5" -0 [10.0M +318 -0]

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
5	1200651724	805007A09M020	6.56' +3.5" -0 [2.0M +89 -0]
5	1200651726	805007A09M040	13.12' +6.5" -0 [4.0M +165 -0]
5	1200651727	805007A09M050	16.40' +6.5" -0 [5.0M +165 -0]
5	1200651728	805007A09M060	19.69' +6.5" -0 [6.0M +165 -0]
5	1200652123	805007A09M100	32.81' +12.5" -0 [10.0M +318 -0]

DESCRIPTION EC NO: WEU2010-0261 DRWN: LSTEMMLE 2010/01/13 CHKD: RE APPR: NSTAUDIG 2010/01/25	QUALITY SYMBOLS <div>▽ = 0</div> <div><div>C</div> = 0</div>	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
			mm	INCH	DRAWN BY DATE		MICRO-CHANGE CORDSET 3/4/5-P. M 90 SINGLE KEY 22/3-5 YELLOW PVC CABLE			
		4 PLACES	±---	±---	---					
		3 PLACES	±---	±---	CHECKED BY DATE		MOLEX INCORPORATED			
		2 PLACES	±---	±.01	RE 2010/01/14					
		1 PLACE	±0.3	±---	APPROVED BY DATE					
		ANGULAR ± --- °			NSTAUDIG 2010/01/25					
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			MATERIAL NO.		DOCUMENT NO.		SHEET NO.	
					SEE TABLE		SD-120065-029		1 OF 1	
					SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				