


FED. MFG. CODE 91929

CATALOG LISTING

15AS16

L FORD CONNECTOR
P/N E43B-14A624-CA

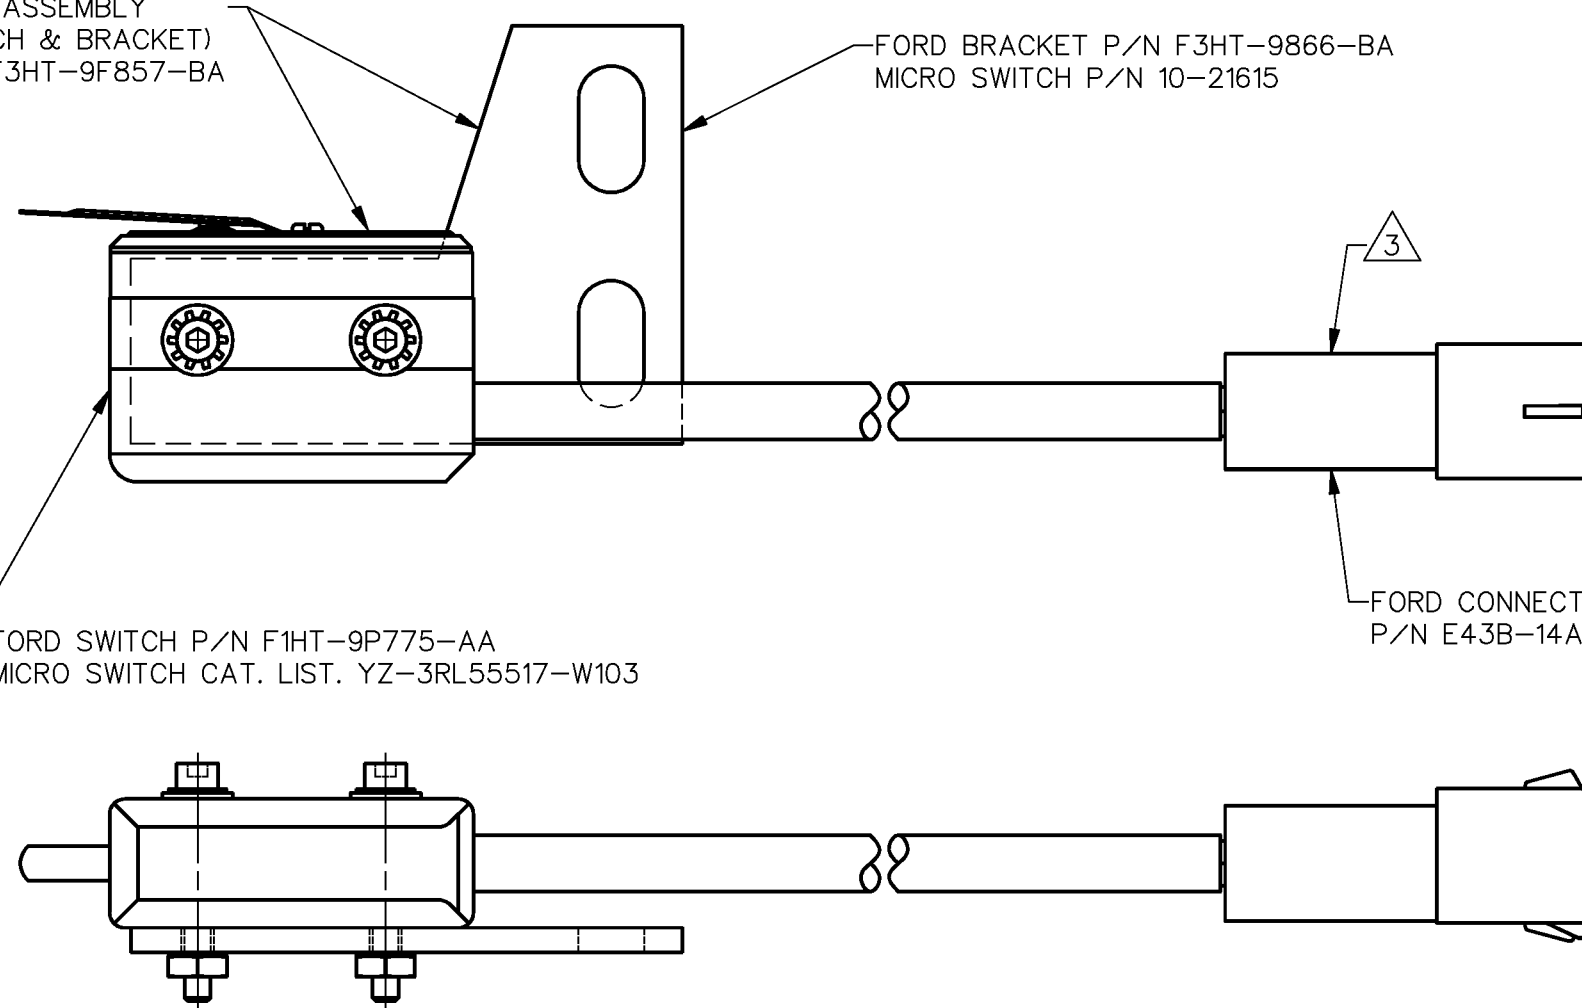

1 - SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE
2 - FORD ASSEMBLY PART NUMBER "F3HT-9F857-BA" STAMPED
^ ON BRACKET

3 — ON BRACKET
TERMINAL CONNECTOR: PEC—PLASTICS ENG. DIV. — CONNECTOR P/N E43B—14A624—CA
ALTAIR INTERNATIONAL — TERMINALS P/N E8EB—14461—HA
STERLING PLASTICS — SPACER P/N EOAB—14A468—AA

4 — LEADWIRE ORIENTATION: COMMON TERMINAL — BLACK WIRE
NORMALLY OPEN TERMINAL — WHITE WIRE

ANSI Y14.5M-1982 APPLIES

ISSUE	2
-------	---

REVISIONS	
A	CO- 83499
	WJC
4	OCT 96

--	--

0

RAWN

DDM

REPLACES

-20265

USE NO. P

REL	
-----	--

HECK	
------	--

5

92	CHEN
----	------

5	18	5
---	----	---

	CHECK	☐
--	-------	--------------------------

16 SEP 91

WJC

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH


CHARACTERISTICS

OPERATING FORCE	— — —	9 OZ MAX
RELEASE FORCE	— — — —	1/2 OZ MIN
DIFFERENTIAL TRAVEL	— — —	.065 MAX
OVERTRAVEL	— — — — —	.060 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P N O

THIRD ANGLE PROJECTION



SCALE	FULL
-------	------

DO NOT SCALE PRINT

**UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE**

ONE PLACE (.0) ±.030

TWO PLACE (.00) $\pm .015$

THREE PLACE (.000) ± .

ANGLES	±
--------	---

WEIGHT .78 LBS MAX