

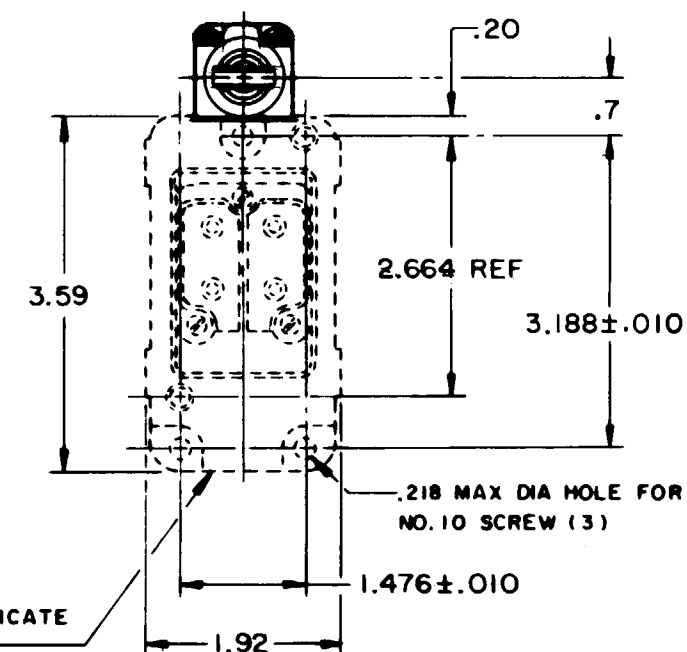
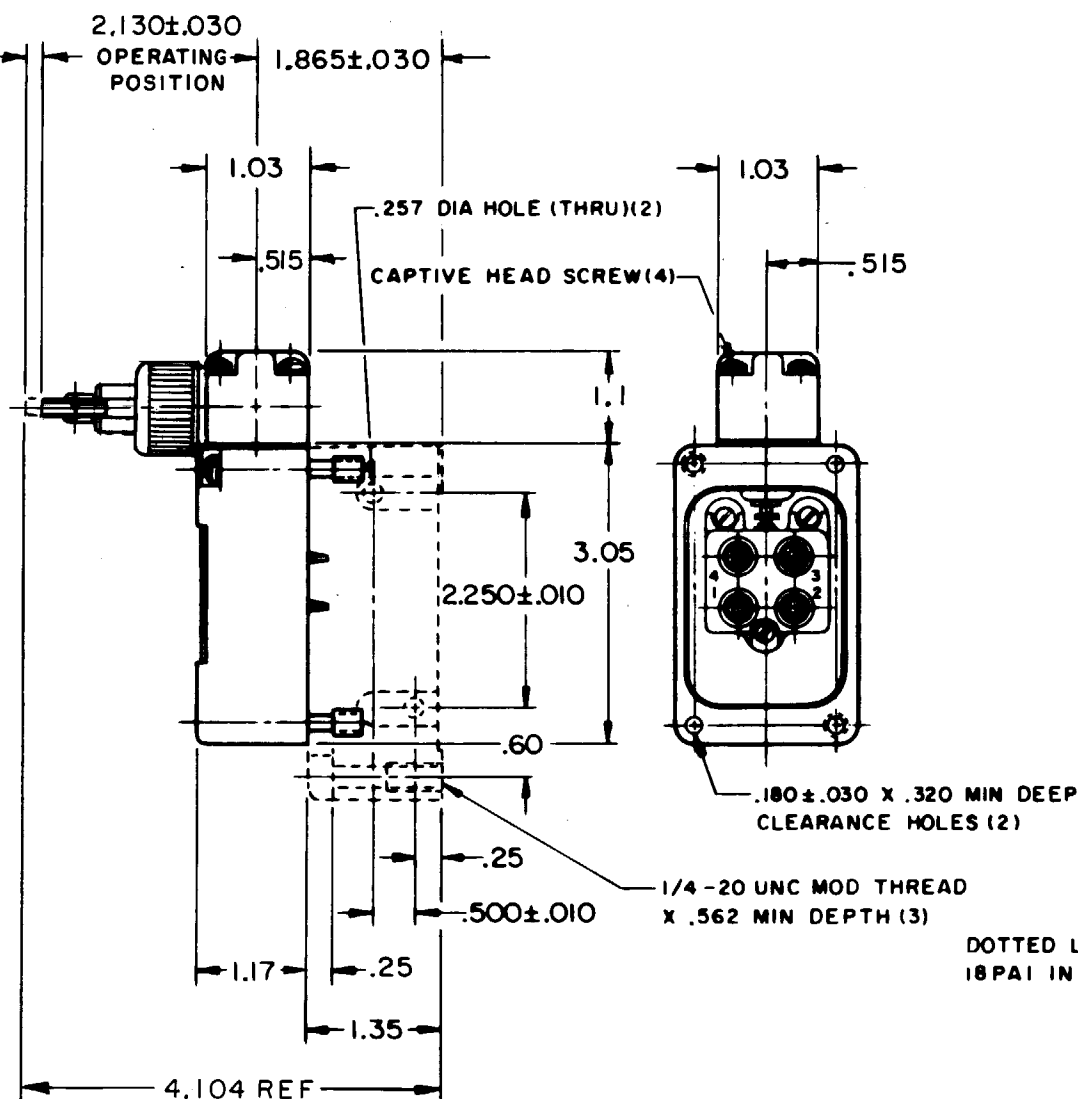
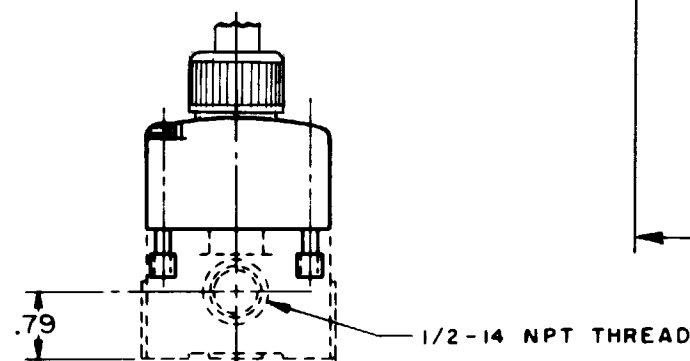
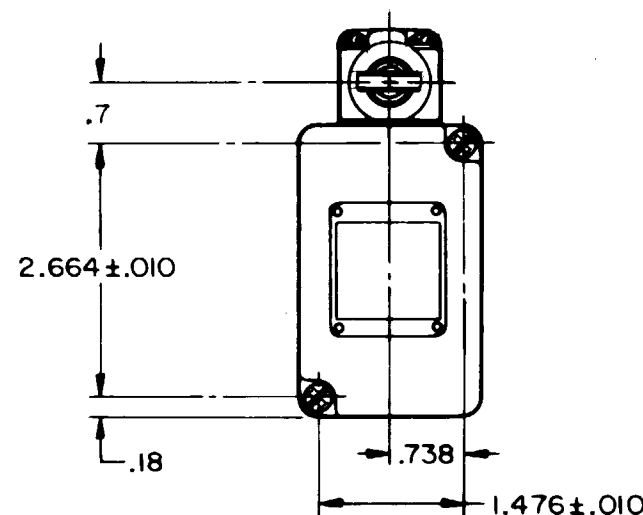




CATALOG LISTING
203LS1

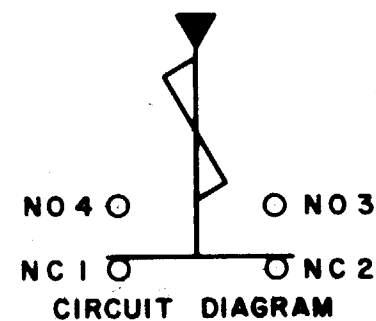

DOTTED LINES INDICATE
18 PAI IN PLACE

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS		ELECTRICAL DATA	SCALE 1/2 TO 1
OPERATING FORCE — — — 9 LB MAX		CONTACT ARRANGEMENT (SEE CIRCUIT DIAGRAM)	DO NOT SCALE PRINT
RELEASE FORCE — — — 2 LB MIN			UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES TOLERANCES ARE:
DIFFERENTIAL TRAVEL — — — .040 MAX		10A-120, 240, OR 480 VAC, 1/3 HP - 120 VAC 3/4 HP - 240 VAC; 0.8A - 115 VDC; 0.4A - 230 VDC .1A - 550 VDC PILOT DUTY: 600 VAC MAX	ONE PLACE (.0) ±.030
OVERTRAVEL — — — .219 MIN			TWO PLACE (.00) ±.015
B SWITCH-BASIC REPLACEMENT — — — 2MN9			THREE PLACE (.000) ±.005
			ANGLES ±
			WEIGHT

NOTE-

4- ROLLER LEVER MAY BE LOCKED IN ANY POSITION THRU 360°