


HONEYWELL
PART NUMBER

23SX78-T2

PRODUCT CODE
VDP5710

REV	DOCUMENT	CHANGED BY	CHECK
8	0087951	NMN 28MAR12	CMH

PLASTIC PLUNGER

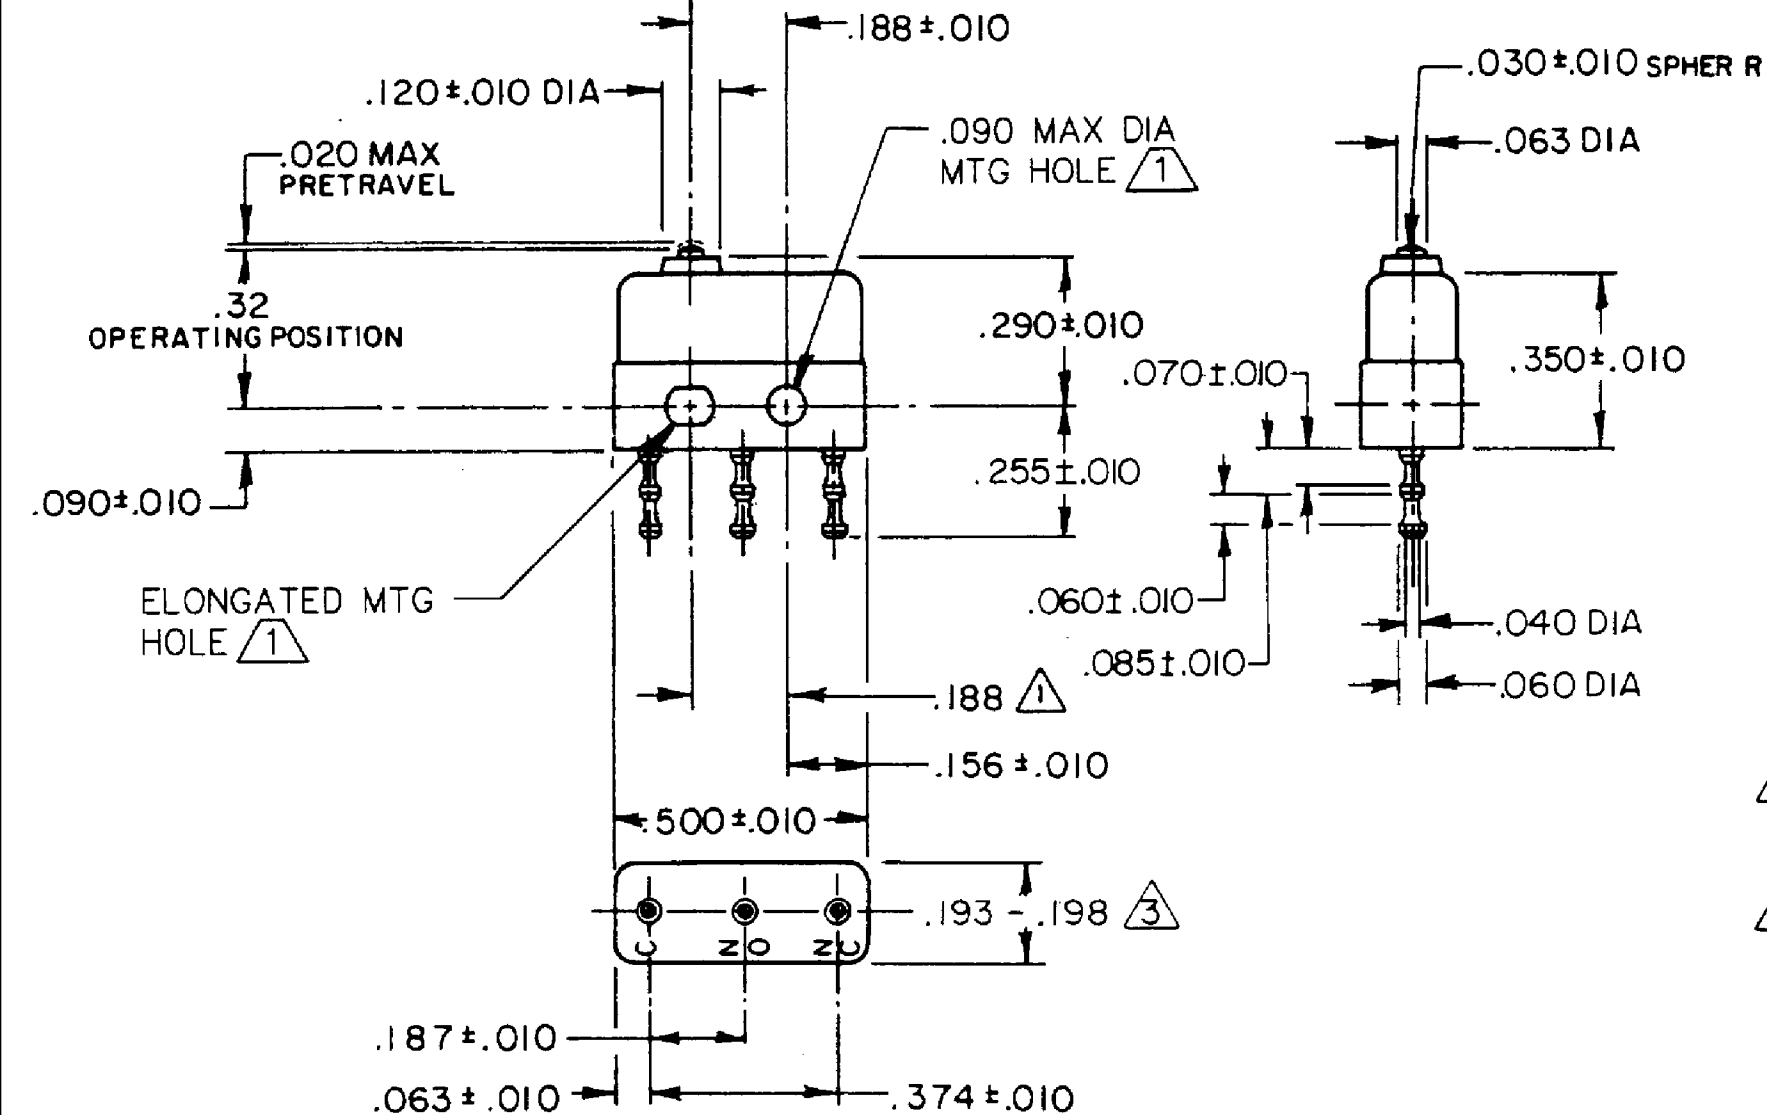

NOTES

- ① MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .087 MAX DIA ON .188±.002 CENTERS
- 2 - TERMINALS ARE PLATED FOR SOLDERING
- ③ - MOVABLE CONTACT MATERIAL - GOLD PLATED, GOLD ALLOY
- 4 - STATIONARY CONTACT MATERIAL - GOLD ALLOY
- 5 - SWITCH WILL WITHSTAND TEMPERATURE OF 185°F

RELEASE NO.
PR-14600REPLACES
X82942-SX

CHARACTERISTICS

OPERATING FORCE - - - 5 OZ MAX

RELEASE FORCE - - - - 1 OZ MIN

DIFFERENTIAL TRAVEL - - - .005 MAX

OVERTRAVEL - - - - - .004 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SPDT

30 VOLTS DC RATING

	SEA LEVEL	50,000 FT
INDUCTIVE	0.5 AMP	0.5 AMP
RESISTIVE	1 AMP	1 AMP

MAXIMUM INRUSH 2 AMP

APPROVALS	KEMA, CE	1A 250 V ~ T125 25E3	UL, CSA	1A 125 VAC

DESIGN UNITS: INCH

TOLERANCES UNLESS NOTED:

NO PLACE	X	±
ONE PLACE	.X	±
TWO PLACE	.XX	±
THREE PLACE	.XXX	±
FOUR PLACE	.XXXX	±
ANGLES		±

THIRD ANGLE PROJECTION



DRAWN	SPK	25FEB08
CHECK	RJ	25FEB08

THIS DRAWING COVERS A PROPRIETARY ITEM
AND IS THE PROPERTY OF HONEYWELL.
THIS DRAWING IS NOT TO BE COPIED OR USED
WITHOUT THE PERMISSION OF HONEYWELL.

INTERPRET PER ANSI Y14.5M-1982
OTHER HONEYWELL ENGINEERING
STANDARDS MAY APPLY

RASTER

Honeywell

TITLE

SWITCH - BASIC

SIZE	TYPE	DRAWING NAME	REV
B	I	23SX78-T2	8
SCALE	-	WEIGHT:	SHEET 1 OF 1