Number of contacts

9–37
50

Mounting height





Low-Profile Versions

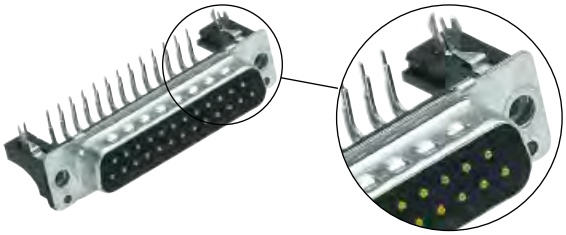

Turned solder pins, angled with snap-in-clips and grounding board locks

D-Sub

Identification	No. of contacts	Part No.		Part No.	
Performance levels ▶ Explanations see page 05.04 Other performance levels on request		Performance level 3		Performance level 2	
Male connector metal shell with dimples		2.54 mm pitch		2.54 mm pitch	
	9	09 66 162 781	.	09 66 162 681	.
	15	09 66 262 781	.	09 66 262 681	.
	25	09 66 362 781	.	09 66 362 681	.
	37	09 66 462 781	.	09 66 462 681	.
available on request	50	09 66 562 781	.	09 66 562 681	.

Please insert digit for flange thread or fitted female screw locks

M3 ▶	5
4-40 UNC ▶	6
fitted screw locks 4-40 UNC ▶	7