

2 PB363

PAGE 1 OF 1

REPLACES

RELEASE NO. PR-9301

M

DRAWING
NUMBER

2

ISSUE

REVISIONS

A CO-
93593
PPF
26 OCT 98

CHECK

26 OCT 98

CHECK

JAF

18 AUG 80

CHECK



CEB

18 AUG 80

CHECK

TRF


DRAWN

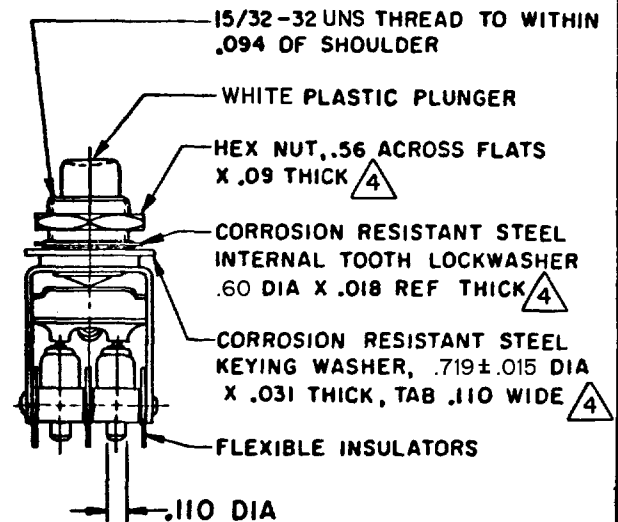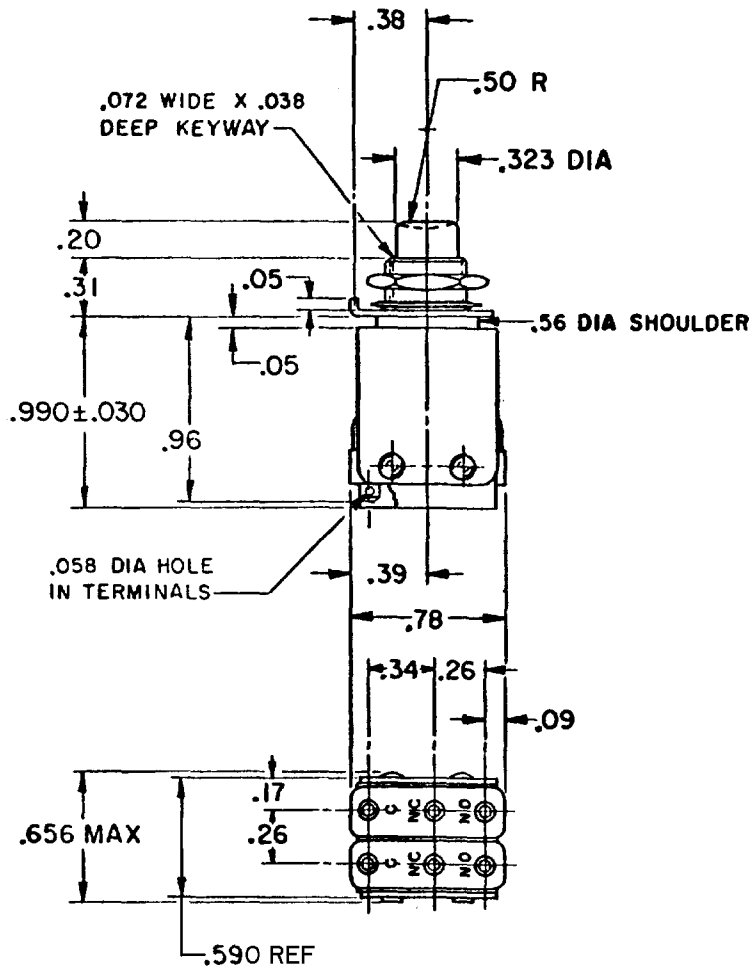

NOTES

- 1 - UNIT INCLUDES "IISM" TYPE BASIC SWITCH (2)
- 2 - TERMINALS ARE PLATED FOR SOLDERING
- 3 - SWITCHES DO NOT NECESSARILY OPERATE SIMULTANEOUSLY
- (4) MOUNTING HARDWARE FURNISHED UNASSEMBLED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.



CHARACTERISTICS

OPERATING FORCE ----- 30 OZ APPROX
 PRETRAVEL ----- .040 APPROX
 DIFFERENTIAL TRAVEL ----- .050 MAX
 TOTAL TRAVEL ----- .110 APPROX

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T (2)

250 VAC ----- 5 AMP
 30 VOLTS DC RATING
 INDUCTIVE ----- SEA LEVEL ----- 3 AMP
 50,000 FT ----- 2.5 AMP
 RESISTIVE ----- SEA LEVEL ----- 5 AMP
 50,000 FT ----- 5 AMP
 MAXIMUM INRUSH ----- 24 AMP

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
 APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR
 REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

	DIM. mm	TOL. mm/in	DIM. in	TOL. mm/in
NO PLACES	±	17.04	±	0.67.03
ONE PLACE	±	0.4/016	±	0.38/015
TWO PLACES	±	0.16/008	±	0.13/005
THREE PLACES	±		±	
ANGLES				

DESIGN UNITS ☐ SI METRIC

☒ US CUSTOMARY

WEIGHT