


REV	DOCUMENT	CHANGED BY	CHECK
6	0038114	KVS 03JUN08	ASD

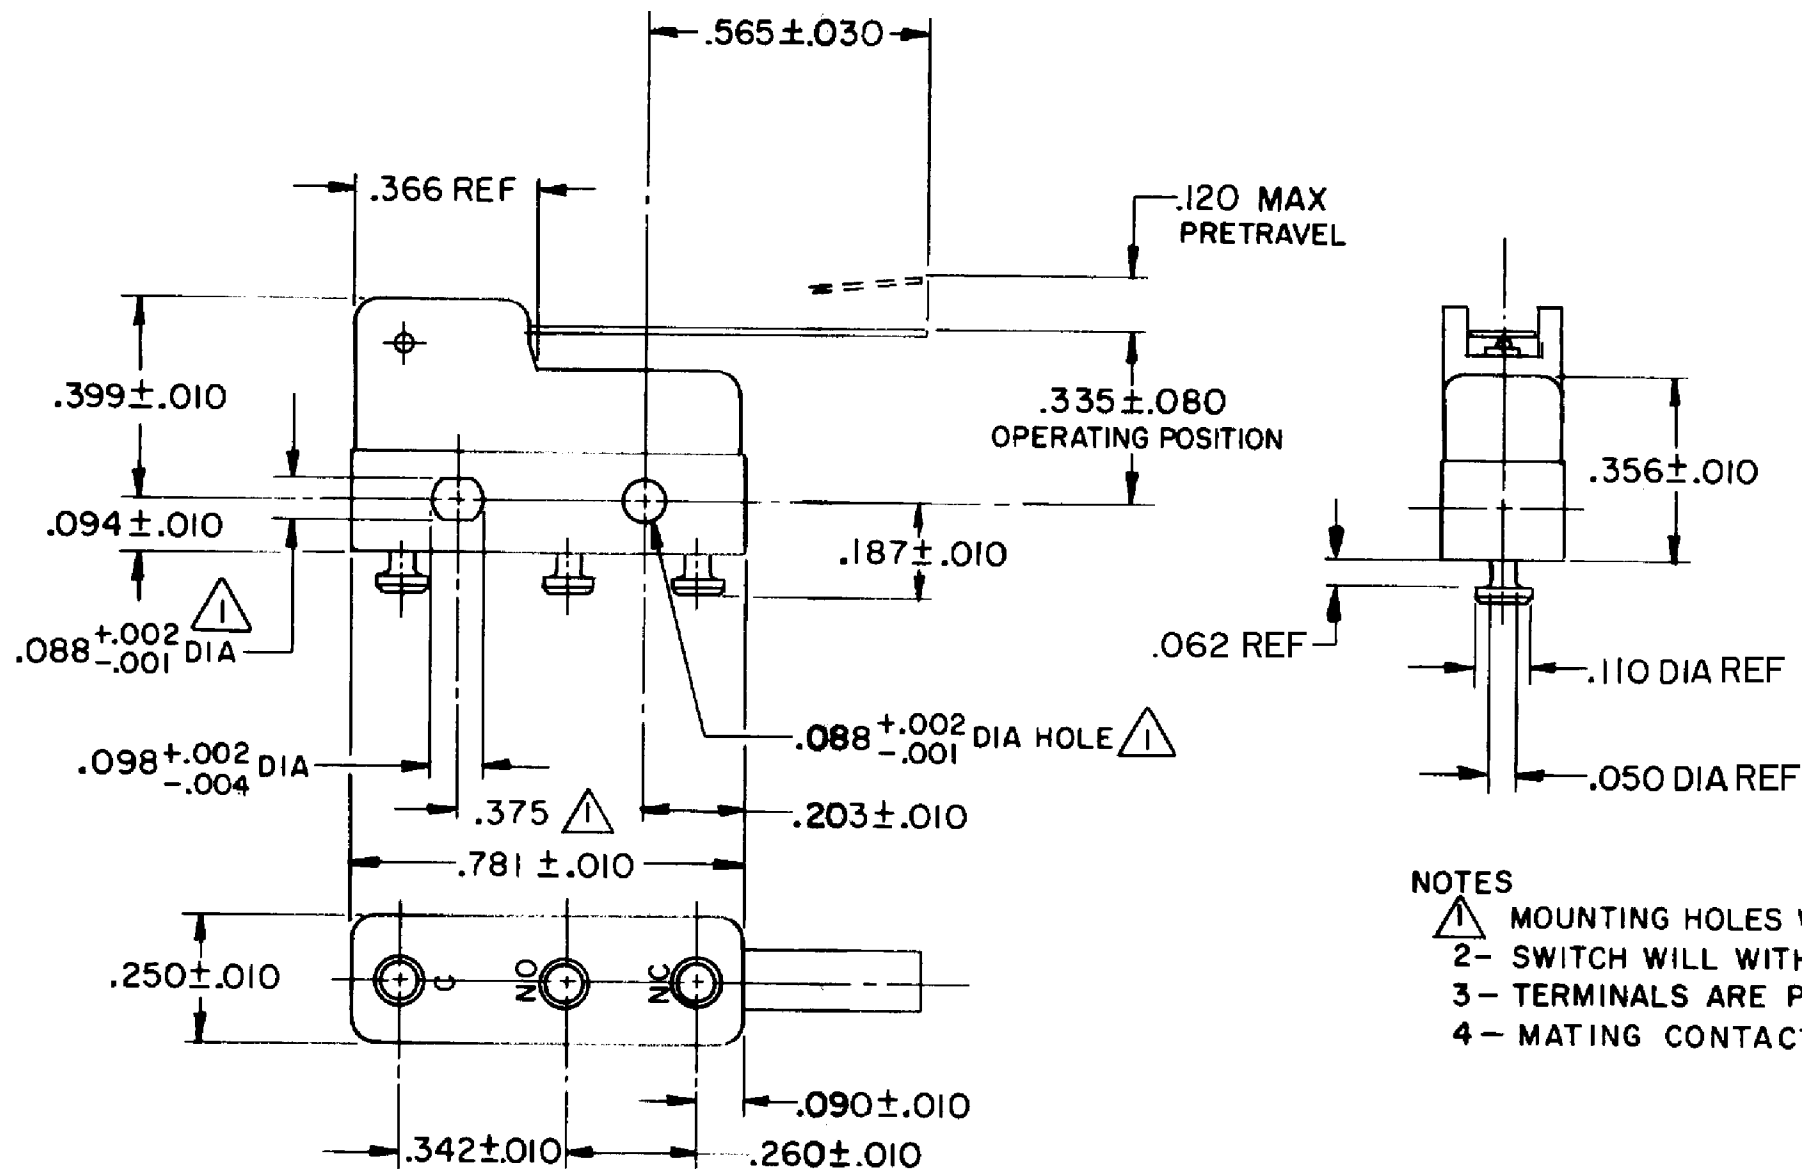

1- MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ± .002 CENTERS
 2- SWITCH WILL WITHSTAND TEMPERATURE OF 250°F
 3- TERMINALS ARE PLATED FOR SOLDERING
 4- MATING CONTACT SURFACES ARE 24K SOLID GOLD OVERLAY

RELEASE NO.	PR - 2823
REPLACES	

CHARACTERISTICS		ELECTRICAL DATA			DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± - ONE PLACE .X ± 0.030 TWO PLACE .XX ± 0.015 THREE PLACE .XXX ± 0.005 FOUR PLACE .XXXX ± - ANGLES ± -		DRAWN	VK	07 NOV 07	Honeywell			
OPERATING FORCE – – 30 GRAM MAX		CONTACT ARRANGEMENT S P D T					CHECK	RJ	07 NOV 07				
RELEASE FORCE– – – – 5 GRAM MIN		30 VOLTS DC RATING			THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		TITLE SWITCH - BASIC						
DIFFERENTIAL TRAVEL– – – .027 MAX		SEA LEVEL 50,000 FT											
OVERTRAVEL – – – – – .026 MIN		INDUCTIVE 1/2 AMP 1/2 AMP					INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY						
		RESISTIVE 1 AMP 1 AMP											
		MAXIMUM INRUSH 2 AMP			THIRD ANGLE PROJECTION 		SIZE		TYPE	DRAWING NAME		REV	
APPROVALS		KEMA, CE	1A, 250V ~ T85 1E4					B	I	311SM43-T		6	
		UL, CSA	1A, 125 VAC					BRAND	L22	SCALE -		WEIGHT .006 LB MAX	SHEET 1 OF 1