


Number of contacts

9–50

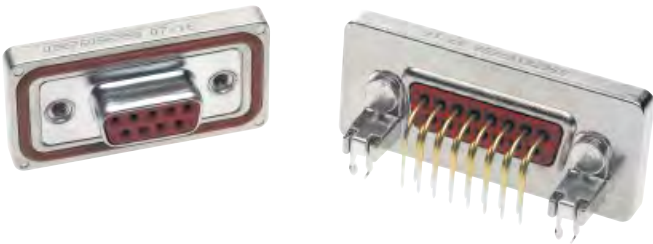

IP 67, angled turned solder pins,
with rear metal mounting plate, bracket and board lock

Identification		No. of contacts	Part No.	
D-Sub			S4 ¹⁾	
	Male connector metal shell with dimples	9 15 25 37 50	09 67 609 09 67 615 09 67 625 09 67 637 09 67 650	. 658 . 658 . 658 . 658 . 658
	Please insert digit for flange thread	4-40 UNC ▶ 7 M3 ▶ 9		
	Female connector metal shell	9 15 25 37 50	09 67 609 09 67 615 09 67 625 09 67 637 09 67 650	. 758 . 758 . 758 . 758 . 758
	Please insert digit for flange thread	4-40 UNC ▶ 6 M3 ▶ 8		

¹⁾ S4 = 0.76 µm (30 µinch) Au or PdNi equivalent