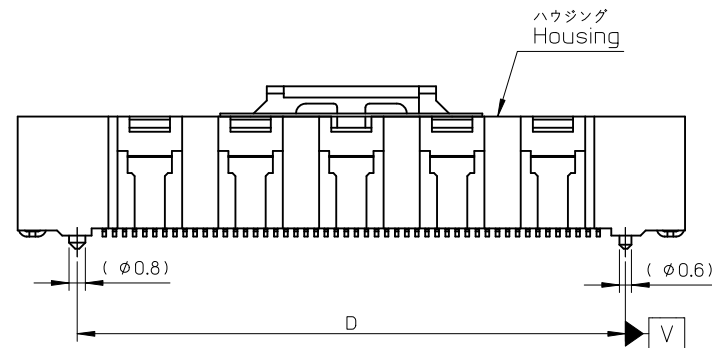
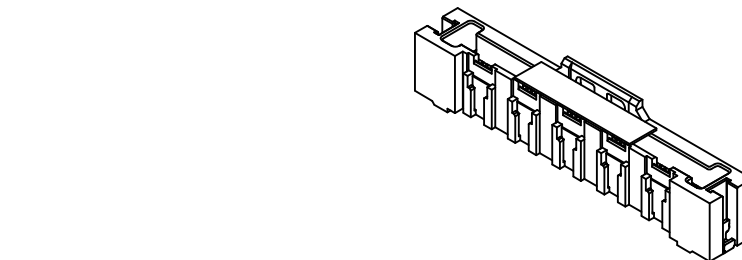
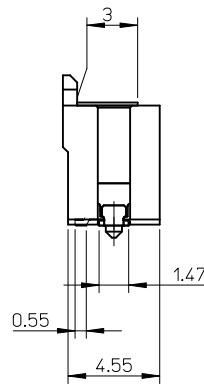
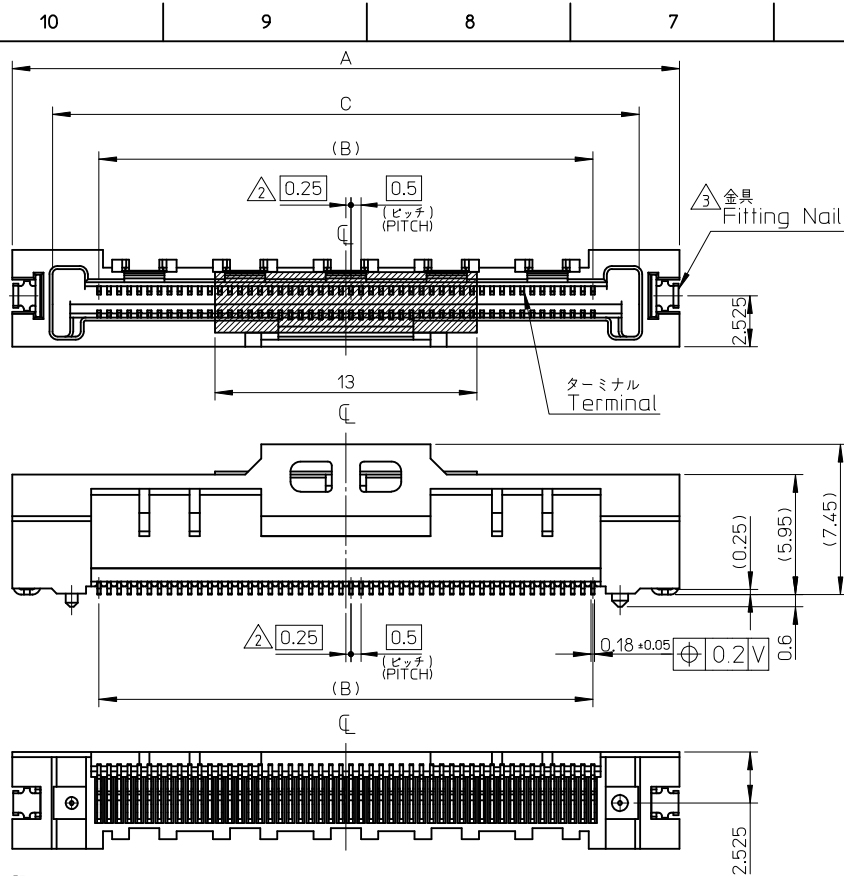



参考基板レイアウト
P.C. BOARD PATTERN
DIMENSION (REF.)
(マウント面)
(MOUNTING SIDE)

注記 NOTE



1. 使用材料
MATERIAL
ハウジング
HOUSING : 液晶ポリマー (LCP), ガラス充填,
UL 94V-0 色: 黒色
LIQUID CRYSTAL POLYMER (LCP),
GLASS FILLED, UL 94V-0 COLOR: BLACK
ターミナル
TERMINAL : 銅合金 (t=0.18)
ニッケル下地 金メッキ (コンタクト、テール部)
COPPER ALLOY (t=0.18)
GOLD PLATING (CONTACT, TAIL AREA) OVER NICKEL PLATING.
金具
FITTING NAIL : 銅合金 (t=0.25)
ニッケル下地 錫メッキ
COPPER ALLOY (t=0.25)
TIN OVER NICKEL PLATING.

- △ N=偶数に適用 (N: 極数)
APPLY FOR N-EVEN IN CIRCUIT
△ パターン剥離止め用金具
FITTING NAIL FOR PREVENTION OF PEELING
OF P.C.B. PATTERN.
△ 適合ジャケット: 501783-**09
製品詳細寸法はSD-501783-001を参照下さい。
APPLICABLE JACKET: 501783-**09
RE DETAILED DIMENSION, SEE "SD-501783-001."
△ 適合ジャケットカバー: 501784-**09
製品詳細寸法はSD-501784-001を参照下さい。
APPLICABLE JACKET: 501784-**09
RE DETAILED DIMENSION, SEE "SD-501784-001."
6. ELV及びRoHS適合品
ELV AND RoHS COMPLIANT


REVISED	EC NO. J2010-1937	2010/03/25	DRWN:Y MORI	2010/03/25	CHKD:MATSUURA	2010/03/25	APPR:KMORI KAWA	2010/05/10	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE —//—	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
										10 UNDER	±0.2	DRAWN BY	DATE	TITLE 0.5 FFC TO BOARD CONN REC HSG ASSY(ST)			
										10 OVER 30 UNDER	±0.25	CHECKED BY	DATE				
										30 OVER	±0.3	APPROVED BY	DATE	MOLEX MOLEX INCORPORATED			
										ANGULAR	±1 °	H. IJIMA	06/01/13				
										DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO. 501786-**-11		SHEET NO. 1 OF 2			
												SIZE A3					
										THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

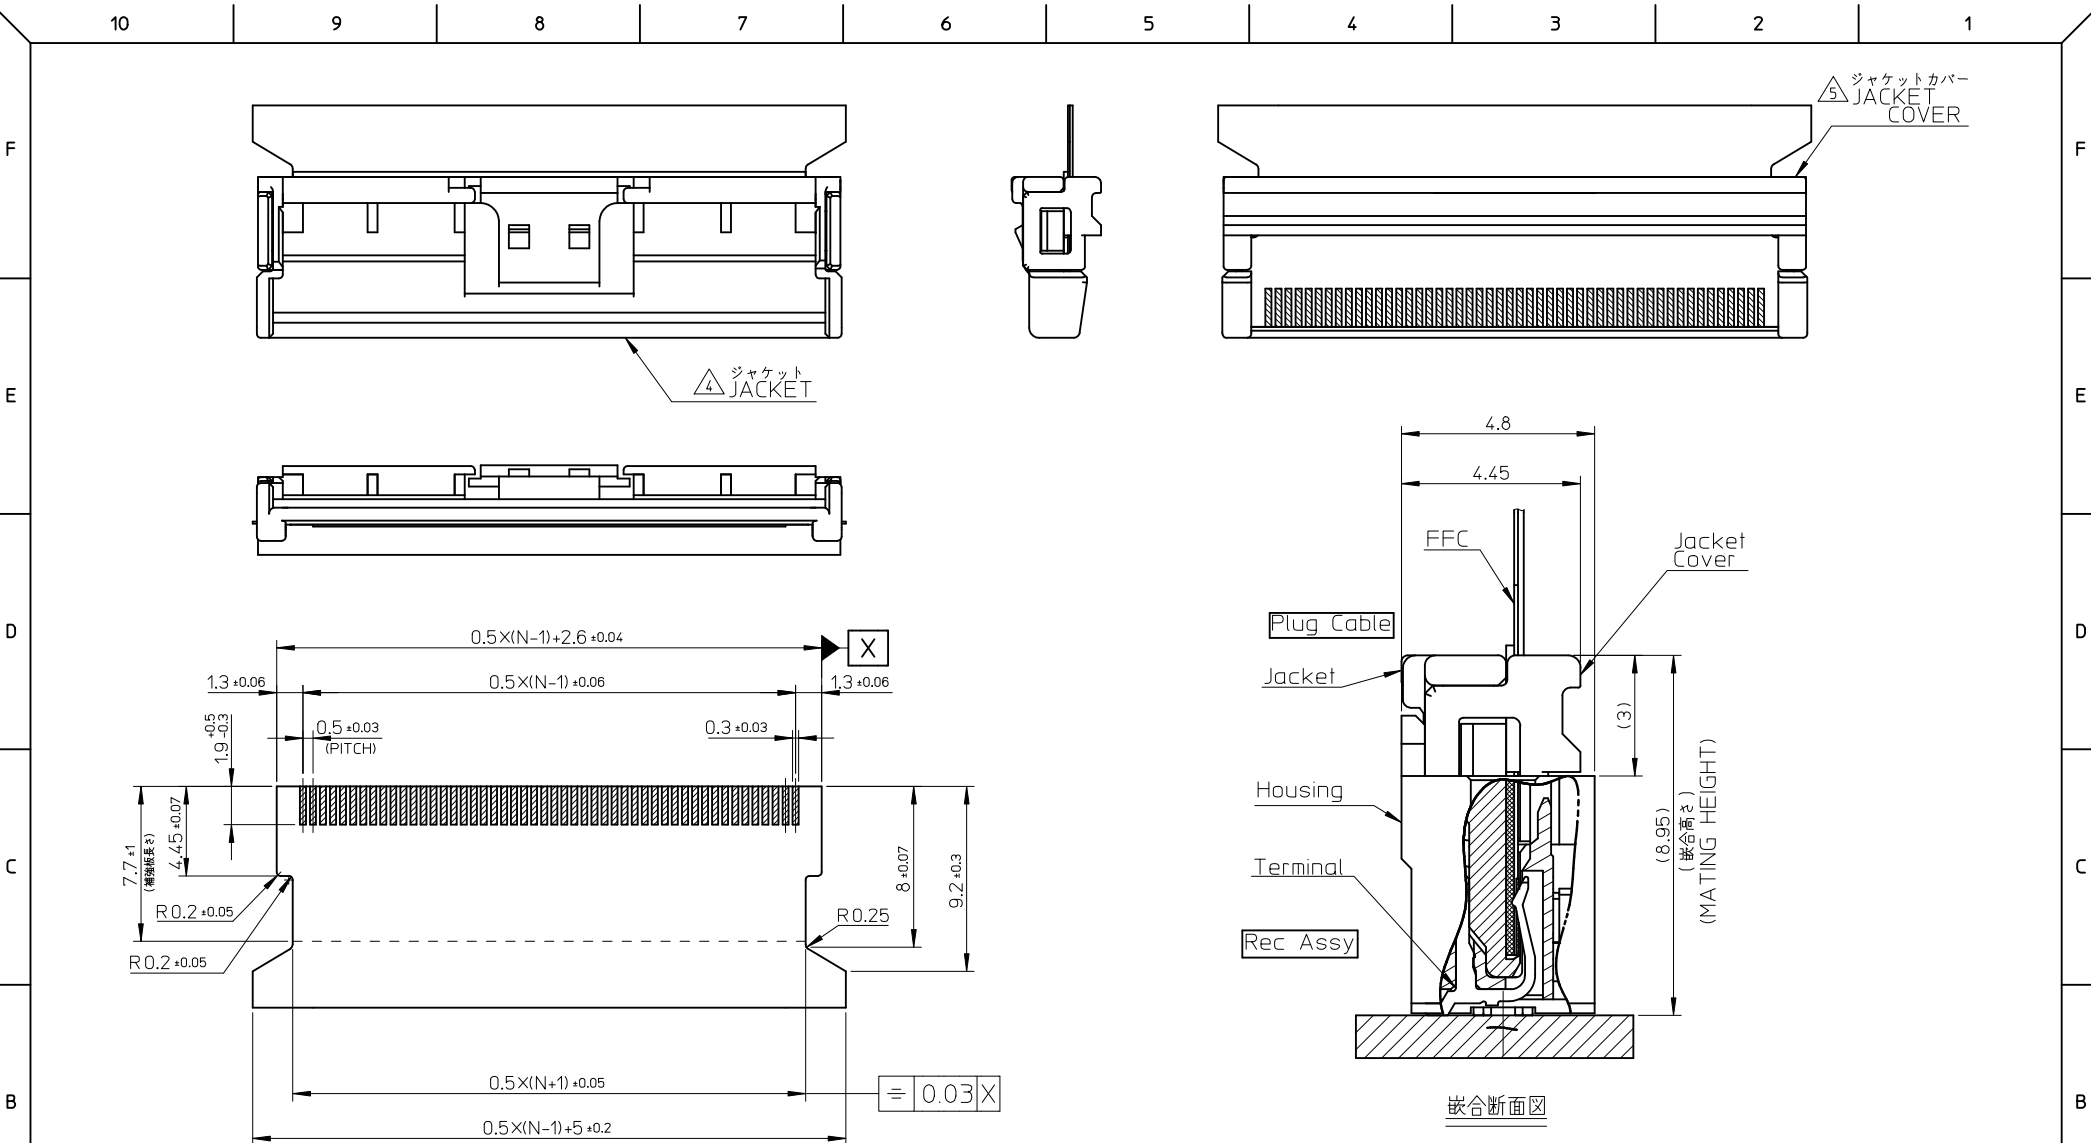

コネクタ接点部		適合FFC推奨寸法 APPLICABLE FFC RECOMMENDED DIMENSION (仕上がり厚さ: コネクタ接点部 0.3±0.03)		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 1:1		DESIGN UNITS METRIC		THIRD ANGLE PROJECTION	
SEE SHEET 1 OF 2		2010/03/25		10 UNDER		DRAWN BY		DATE		TITLE		0.5 FFC TO BOARD CONN REC HSG ASSY(ST)	
EC NO: J2010-1937		2010/03/25		10 OVER 30 UNDER		H. IJIMA		06/01/13		CHECKED BY		K. TAKAHASHI	
DRWN: YMORI		2010/03/25		30 OVER		DATE		06/01/13		APPROVED BY		H. HIRATA	
CHKD: MATSUURA		2010/05/10		ANGULAR		DATE		06/01/13		MATERIAL NO.		501786-**11	
APPR: KMORI KAWA		2010/05/10		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DATE		06/01/13		DOCUMENT NO.		SD-501786-001	
REV		A		SIZE		A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		SHEET NO.		2 OF 2	

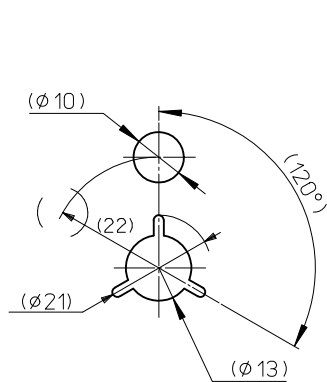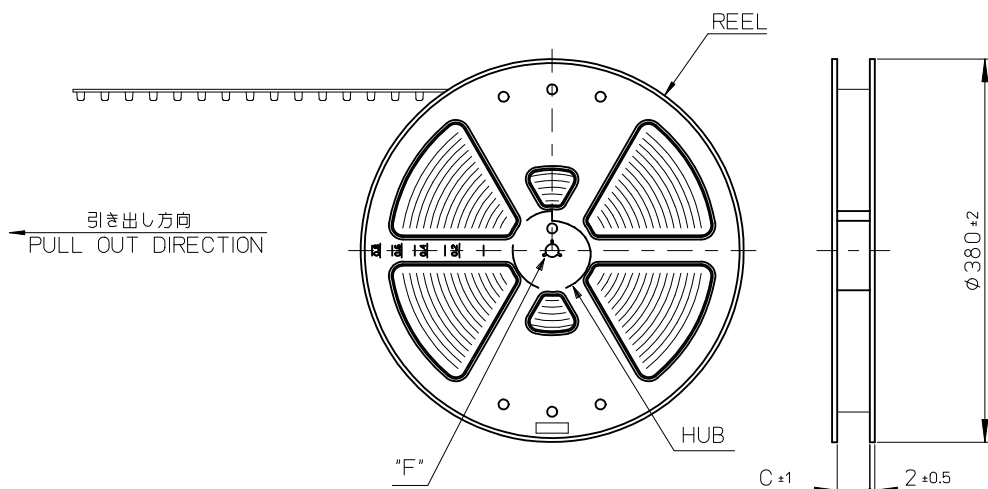


DETAIL "F"




HUB

NOTES

- 梱包数量 : 900 個/リール
NUMBER OF CONNECTORS:900 PCS/REEL
- リードテープ長さ
LEAD TAPE LENGTH

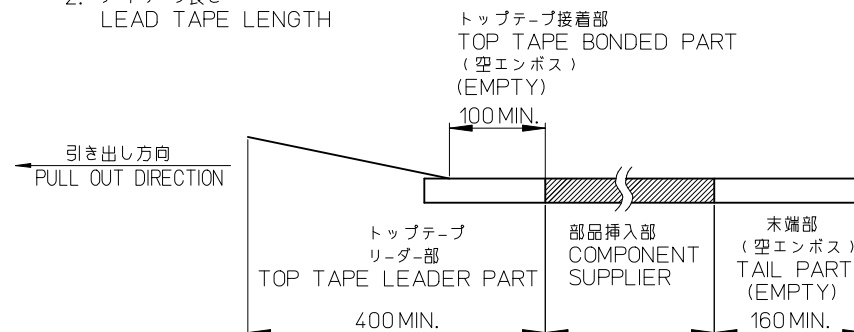

- トップテープの剥離強度 : 0.1~1.27N(10~130gf)
(剥離方向は下図参照)
剥離速度 : 300mm/MIN. (参考)
PEEL-OFF FORCE OF TOP TAPE : 0.1~1.27N(10~130gf)
(PEELING DIRECTION AS SHOWN IN FOLLOWING FIG.)

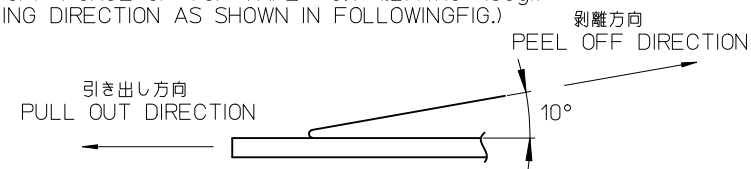

- 製品詳細寸法については図面 SD-501786-001を参照下さい。
RE DETAILED DIMENSION, SEE SD-501786-001.
- 材料(MATERIAL)
キャリアテープ(CARRIER TAPE) : ポリスチレン(POLYSTYRENE)
トップテープ(TOP TAPE) : PET, PE, PE
リール(REEL) : ポリスチレン(POLYSTYRENE)<リサイクル材を含む>
<RECYCLE MATERIAL CONTAINED>
- ELV及びRoHS適合品
ELV AND RoHS COMPLIANT

REVISED EC NO.: J2010-1937 DWG. BY: MORI CHKD.: MATSUURA APPD.: KIMORI KAWA	2010/03/25 2010/03/25 2010/05/10	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
			10 UNDER	± 0.2	DRAWN BY H. IJIMA	DATE 06/01/17	TITLE EMBSTP PKG FOR 0.5 FFC TO BOARD ST TYPE				
			10 OVER 30 UNDER	± 0.25	CHECKED BY K. TAKAHASHI	DATE 06/01/17					
			30 OVER	± 0.3	APPROVED BY H. HIRATA	DATE 06/01/17	MOLEX MOLEX INCORPORATED				
			ANGULAR ±3 °		MATERIAL NO. 501786-**90		DOCUMENT NO. SD-501786-002		SHEET NO. 1 OF 2		
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						
A	REV										

10

9

8

7

6


5

4



3

2

1

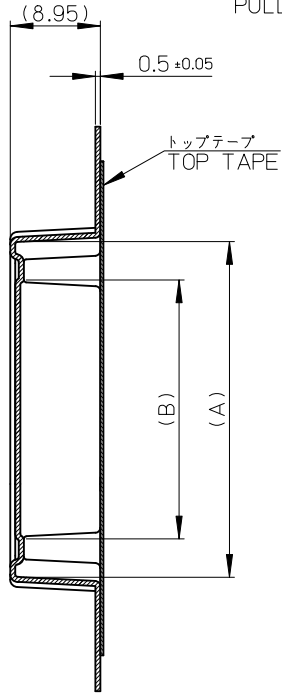引き出し方向
PULL OUT DIRECTION

SECT. Y-Y

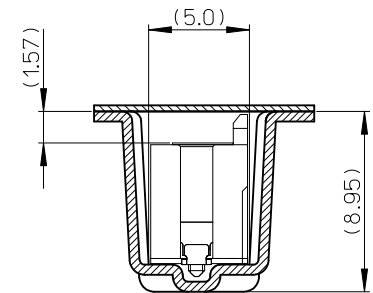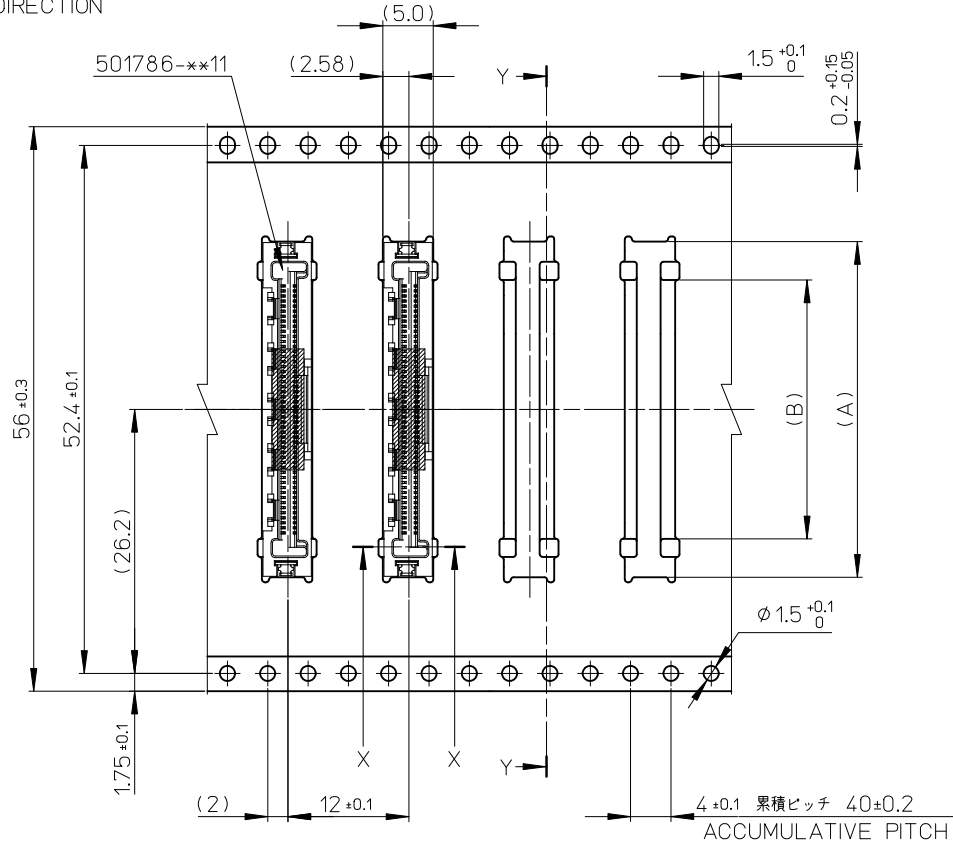

SECT. X-X

56mm幅キャリアテープ
56mm WIDTH CARRIER TAPE

56	57.4	25.68	33.3	501786-5090	50
キャリアテープ幅 CARRIER TAPE WIDTH	C	B	A	オーダー番号 ORDER NO.	極数 CKT

SEE SHEET 1 OF 2 EC NO.: J2010-1937 DRWN: YMORI 2010/03/25 CHKD: MATSUURA 2010/03/25 APPR: KMORI KAWA 2010/05/10 A	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	± 0.2	DRAWN BY H. IJIMA	DATE 06/01/17	TITLE EMBSTP PKG FOR 0.5 FFC TO BOARD ST TYPE MOLEX INCORPORATED				
		10 OVER 30 UNDER	± 0.25	CHECKED BY K. TAKAHASHI	DATE 06/01/17					
		30 OVER	± 0.3	APPROVED BY H. HIRATA	DATE 06/01/17					
		ANGULAR ± 3 °		MATERIAL NO. 501786-**90		DOCUMENT NO. SD-501786-002		SHEET NO. 2 OF 2		
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						
	REV									

9

8

7

6

5

4

3

2