
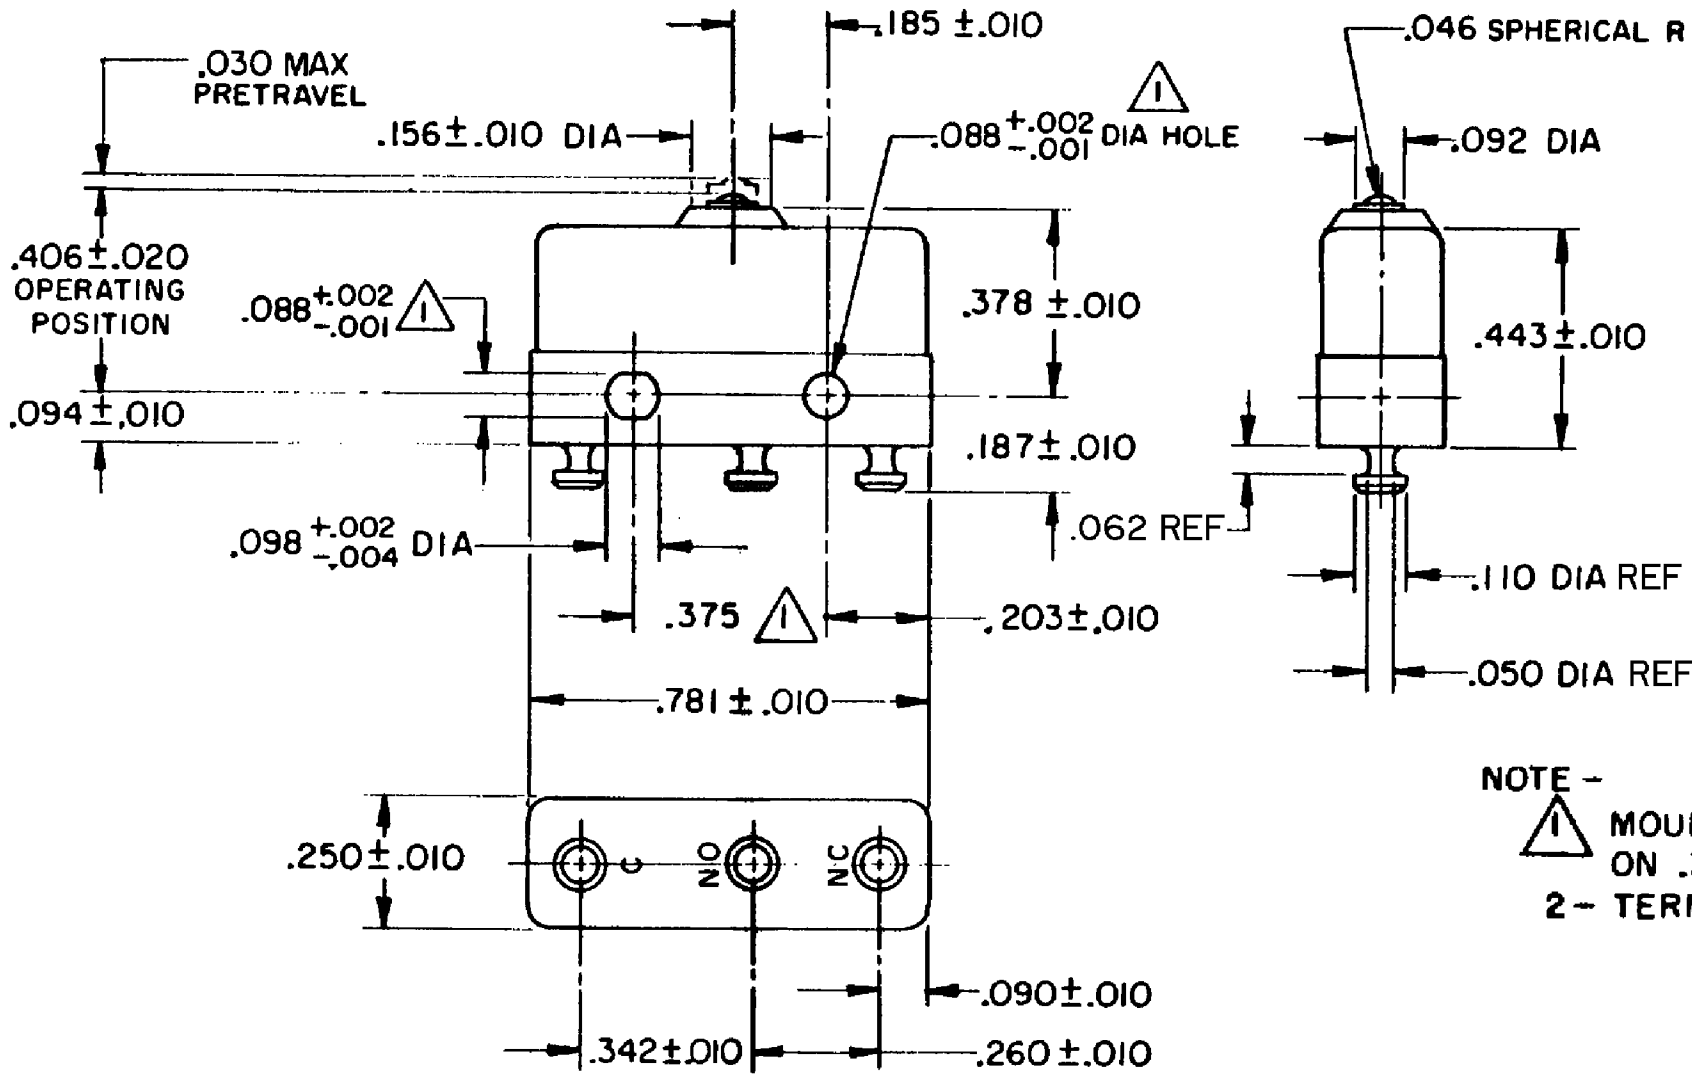


HONEYWELL PART NUMBER
51SM1-T
PRODUCT CODE TYD0100

REV	DOCUMENT	CHANGED BY	CHECK
6	0038225	PRS 04APR08	BLR

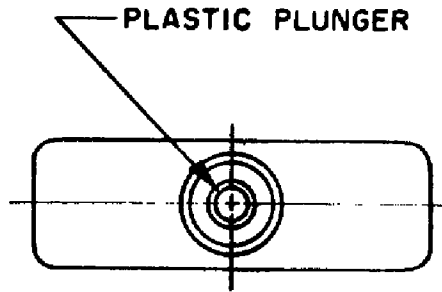

NOTE -
MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ± .002 CENTERS
2 - TERMINALS ARE PLATED FOR SOLDERING

RELEASE NO. SR - 12297

REPLACES -

CHARACTERISTICS		ELECTRICAL DATA			DESIGN UNITS: INCH		DRAWN	VK	23 OCT 07		Honeywell					
OPERATING FORCE – – – – 2 - 5 OZ		CONTACT ARRANGEMENT SPDT			TOLERANCES UNLESS NOTED:		CHECK	RJ	23 OCT 07							
RELEASE FORCE – – – – 1 OZ MIN		30 VOLTS DC RATING			NO PLACE X ± -		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.					TITLE				
		SEA LEVEL 50.000 FT			ONE PLACE .X ± 0.030											
					TWO PLACE .XX ± 0.015											
DIFFERENTIAL TRAVEL – – – .006 MAX		INDUCTIVE	3 AMP	2.5 AMP	THREE PLACE .XXX ± 0.005		INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY					SIZE	TYPE	DRAWING NAME		REV
OVERTRAVEL – – – – – .008 MIN		RESISTIVE	5 AMP	5 AMP	FOUR PLACE .XXXX ± -							B	I	51SM1-T		6
		MAXIMUM INRUSH 24 AMP			ANGLES ± -							SCALE	-	WEIGHT .006 LB MAX	SHEET	1 OF 1
APPROVALS		KEMA, CE	5A. 250V ~ T85 1E4		THIRD ANGLE PROJECTION											
		UL, CSA	5A. 250 VAC		