


5365 Series T-1 Right Angle 2 Wide LED Assembly Description and Features

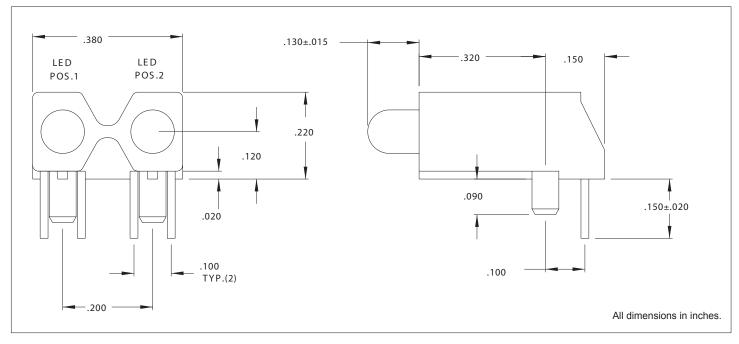

Features

• 2 T-1 LEDs mounted in single block.

· Height and spacing alignment saves assembly cost.

Housing: Black Nylon, UL94V-O

Note: Alternate LEDs are also available in this package as a standard variation. Refer to "Mounting Hole Pattern 5.pdf"

Electro-Optical Characteristics and Ratings

P art Number	E mitted C olor	Typical Intensity (mcd)	R ated C urrent (mA)	Continuous Forward Current Max. (mA)	Forward Voltage		Reverse	Peak	Peak Forward
					Тур. (V)	Max. (V)	Breakdown Voltage Min. (V)	Wavelength (nm)	Current at 1MS-300 PPS (A)
5365F1;1	Red/Red	10	10	30	2.0	3.0	5	650	.1
5365F5;5	Green/Green	16	10	30	2.2	3.0	5	562	.09
5365F7;7	Yellow/Yellow	6.3	10	30	2.1	3.0	5	585	.1



