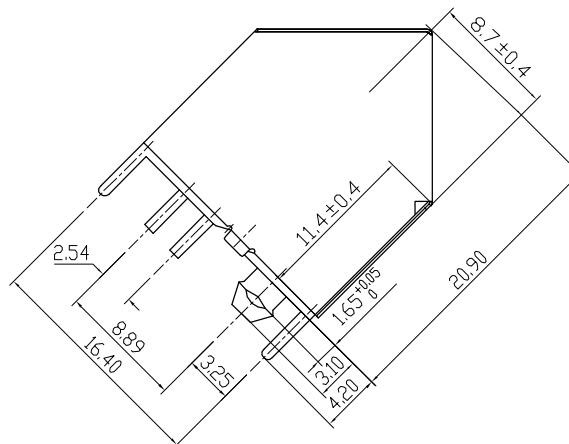


PCB LAYOUT - COMPONENT VIEW



TECHNICAL CHARACTERISTICS



MATERIAL
 INSULATOR MATERIAL: PBT
 FLAMMABILITY RATING UL94-V0
 COLOUR: WHITE
 CONTACT MATERIAL: COPPER ALLOY
 CONTACT TYPE: STAMPED
 CONTACT PLATING: GOLD
 SHIELDING: BRONZE NI PLATED
 QUALITY CLASS: 500 MATING CYCLES

ENVIRONMENTAL
 OPERATING TEMPERATURE: -25 °C UP TO 85 °C
 COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
 CURRENT RATING: 1.5 A
 WORKING VOLTAGE: 125 VAC
 INSULATION RESISTANCE: >500 MOHM
 DIELECTRIC WITHSTANDING VOLTAGE: 1 000 VAC/MN
 CONTACT RESISTANCE: 20 mOHM MAX

SOLDERING
 WAVE PROCESS ONLY

PACKAGING
 TRAY

RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = ± 0.2 .XX = ± 0.15	 WÜRTH ELEKTRONIK	DESCRIPTION: 45° ENTRY SHIELDED 8P8C MODULAR JACK REVERSE MATAL POST TAIL WERI PART NO: 615 008 145 121	SIZE A4
G								
F								
E								
D				APPROVAL: RJ	UNIT: MM SCALE: SHEET: 1/1 DRAW:			
C	07-JUL-10	NEW MEASURES	GG					
B	08-OCT-09	NEW DRAW	JP					
A	23-FEB-09	PDF	JP					
REV	DATE	FILE	BY					