
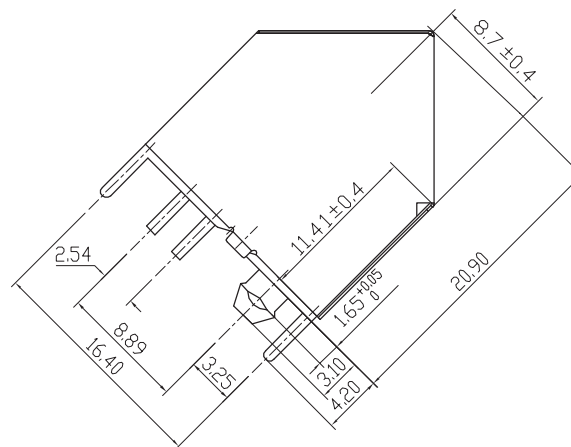


1	2	3	4	5
---	---	---	---	---

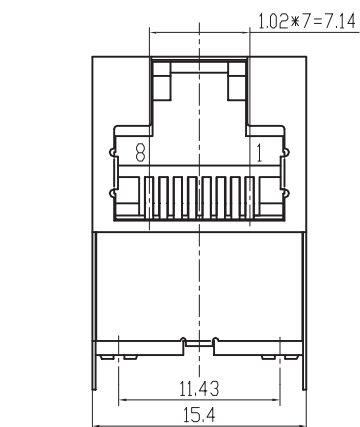

TECHNICAL CHARACTERISTICS


MATERIAL
 INSULATOR MATERIAL: PBT
 FLAMMABILITY RATING UL94-V0
 COLOUR: WHITE
 CONTACT MATERIAL: COPPER ALLOY
 CONTACT TYPE: STAMPED
 CONTACT PLATING: GOLD
 SHIELDING: BRONZE NI PLATED
 QUALITY CLASS: 500 MATING CYCLES

ENVIRONMENTAL
 OPERATING TEMPERATURE: -25 °C UP TO 85 °C
 COMPLIANCE: LEAD FREE AND ROHS


ELECTRICAL
 CURRENT RATING: 1.5 A
 WORKING VOLTAGE: 120 VAC
 INSULATION RESISTANCE: >500 MOHM
 DIELECTRIC WITHSTANDING VOLTAGE: 1 000 VAC/MN
 CONTACT RESISTANCE: 20 mOHM MAX

SOLDERING
 WAVE PROCESS ONLY

PACKAGING
 TRAY

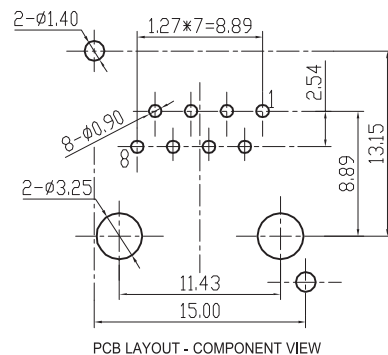

PCB LAYOUT - COMPONENT VIEW

RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = $\pm$ 0.2 .XX = $\pm$ 0.15	 DESCRIPTION: 45° ENTRY SHIELDED 8P8C MODULAR JACK STANDARD METAL POST TAIL WERI PART NO: 615008145221		SIZE A4
G								
F								
E	20-AUG-13	DIM UPDATE	QL					
D	07-JUL-10	NEW MEASURES	GG					
C	29-MAR-10	PLASTIC HOLDER	JC	APPROVAL: RJ	UNIT: MM			
B	08-OCT-09	NEW DRAW	JP		SCALE:			
A	23-FEB-09	PDF	JP		SHEET: 1/1			
REV	DATE	FILE	BY		DRAW:			