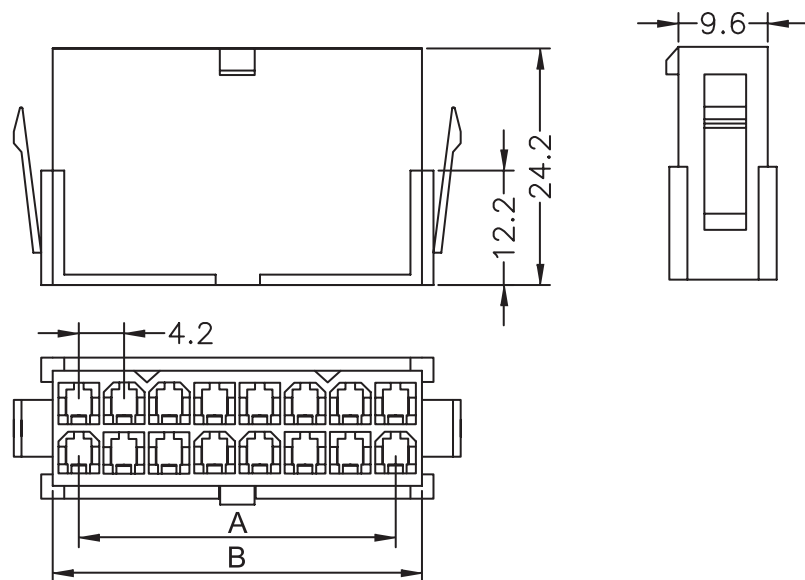


Recommended Panel Cut-out Thickness = 1,40 ±0,40



#### TECHNICAL CHARACTERISTICS

**MATERIAL**  
 INSULATOR: NYLON 66  
 FLAMABILITY RATING: UL94-V0  
 COLOR: WHITE  
 PITCH: 4.20MM

**ENVIRONMENTAL**  
 OPERATING TEMPERATURE: -40 UP TO 105°C  
 COMPLIANCE: LEAD FREE AND ROHS

**ELECTRICAL**  
 CURRENT RATING: 6 TO 9A

NB CIRCUITS □	2-3 □	4-6 □	7-10 □	12-24
AMPERES □	9 □	8 □	7 □	6

WORKING VOLTAGE: 600V AC  
 INSULATOR RESISTANCE: >1000 MOHM  
 DIELECTRIC WITHSTANDING VOLTAGE: 1500VAC/MN

**STANDARD**  
 ⚡ CERTIFIED: E323964 / MODEL NUMBER 649-218


**SOLDERING**  
 WAVE PROCESS ONLY

**PACKAGING**  
 BAG

**DIMENSION**  
 A = 4.20 x (NB PIN / 2 - 1)  
 B = 4.20 x (NB PIN / 2) + 1.30  
 C = 4.20 x (NB PIN / 2) + 6.60

#### RoHS Compliant

PROJECTION:



GENERAL TOLERANCE

.X =  $\pm 0.2$

.XX =  $\pm 0.15$



APPROVAL: RJ

UNIT: MM

SCALE:

SHEET: 1/2

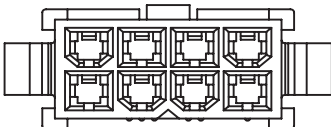
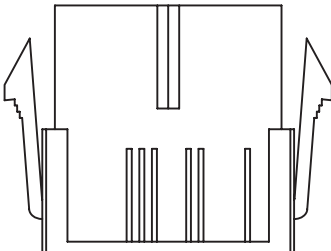
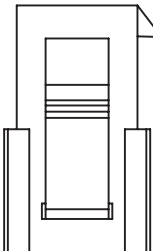


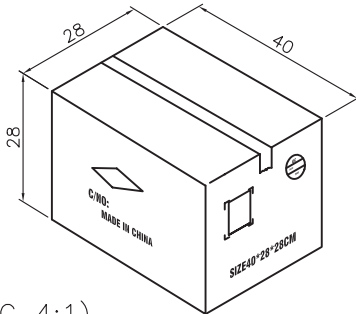


DRAW: DAVID

**DESCRIPTION: 4.20MM MALE DUAL ROW PLUG WITH PANEL MOUNT EARS**

**WERI PART NO: 649 0xx 218 22**

SIZE

**A4**

1				2		3		4		5																																												
								<div>Note: 1.Dimension: Carton Size:40*28*28(cm) 2.Quantity:</div> <table><tr><th>Pin.</th><th>Pcs/Bag</th><th>Pcs/Carton</th><th>Pin.</th><th>Pcs/Bag</th><th>Pcs/Carton</th></tr><tr><td>2</td><td>1000</td><td>7000</td><td>14</td><td>300</td><td>1500</td></tr><tr><td>4</td><td>1000</td><td>4000</td><td>16</td><td>250</td><td>1250</td></tr><tr><td>6</td><td>500</td><td>3000</td><td>18</td><td>200</td><td>1000</td></tr><tr><td>8</td><td>500</td><td>2500</td><td>20</td><td>200</td><td>1000</td></tr><tr><td>10</td><td>500</td><td>2000</td><td>22</td><td>100</td><td>800</td></tr><tr><td>12</td><td>400</td><td>1600</td><td>24</td><td>100</td><td>700</td></tr></table>				Pin.	Pcs/Bag	Pcs/Carton	Pin.	Pcs/Bag	Pcs/Carton	2	1000	7000	14	300	1500	4	1000	4000	16	250	1250	6	500	3000	18	200	1000	8	500	2500	20	200	1000	10	500	2000	22	100	800	12	400	1600	24	100	700	A
Pin.	Pcs/Bag	Pcs/Carton	Pin.	Pcs/Bag	Pcs/Carton																																																	
2	1000	7000	14	300	1500																																																	
4	1000	4000	16	250	1250																																																	
6	500	3000	18	200	1000																																																	
8	500	2500	20	200	1000																																																	
10	500	2000	22	100	800																																																	
12	400	1600	24	100	700																																																	
								Carton (SC 4:1)				B																																										
<table><tr><th colspan="4">RoHS Compliant</th></tr><tr><td>G</td><td></td><td></td><td></td></tr><tr><td>F</td><td></td><td></td><td></td></tr><tr><td>E</td><td></td><td></td><td></td></tr><tr><td>D</td><td></td><td></td><td></td></tr><tr><td>C</td><td></td><td></td><td></td></tr><tr><td>B</td><td></td><td></td><td></td></tr><tr><td>A</td><td></td><td></td><td></td></tr><tr><td>REV</td><td>DATE</td><td>FILE</td><td>BY</td></tr></table>				RoHS Compliant				G				F				E				D				C				B				A				REV	DATE	FILE	BY	<div>PROJECTION: </div>		<div>GENERAL TOLERANCE .X = +/- 0.2 .XX = +/- 0.15</div>		<div> DESCRIPTION: 4.20MM MALE DUAL ROW PLUG WITH PANEL MOUNT EARS WERI PART NO: 6490 xx 21822_TPK</div>				C						
RoHS Compliant																																																						
G																																																						
F																																																						
E																																																						
D																																																						
C																																																						
B																																																						
A																																																						
REV	DATE	FILE	BY																																																			
				APPROVAL: RJ		UNIT: MM SCALE: SHEET: 2/2 DRAW: PEARL		SIZE <b>A4</b>				D																																										