

Recommended Panel Cut-out Thickness = 1,95 ±0,25

TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR: NYLON 66
FLAMABILITY RATING: UL94-V0
COLOR: BLACK
PITCH: 3.00MM

ENVIRONMENTAL
OPERATING TEMPERATURE: -25 UP TO 105°C
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
CURRENT RATING: 5A
WORKING VOLTAGE: 250V AC
INSULATOR RESISTANCE: >1000 MOHM
DIELECTRIC WITHSTANDING VOLTAGE: 1500V AC/MN

STANDARD
UL CERTIFIED: E323964

PACKAGING
BAG


DIMENSION

PINS	A	B	C	D
2	-	3.85	4.21	7.90
4	3.00	6.85	7.21	10.90
6	6.00	9.85	10.21	13.89
8	9.00	12.85	13.21	16.89
10	12.00	15.85	16.21	19.89
12	15.00	18.85	19.21	22.89
14	18.00	21.85	22.20	25.88
16	21.00	24.85	25.20	28.88
18	24.00	27.85	28.20	31.88
20	27.00	30.85	31.22	34.87
22	30.00	33.85	34.22	37.87
24	33.00	36.85	37.22	40.87

RoHS Compliant

G			
F	09-OCT-13	PANEL THICK	QL
E	25-MAR-13	PANEL THICK	AR
D	27-SEP-12	PLASTIC	GG
C	06-JUL-12	PLASTIC	GG
B	18-NOV-09	STANDARD	JP
A	23-AVR-09	PACKAGING	JC
REV	DATE	FILE	BY

PROJECTION:



APPROVAL: RJ

GENERAL TOLERANCE

.X = +/_ 0.2

.XX = +/_ 0.15

UNIT: MM

SCALE:

SHEET: 1/2

DRAW: PEARL


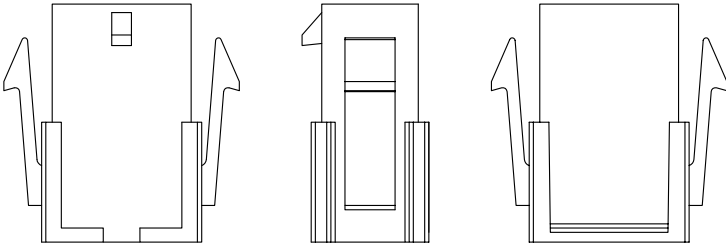


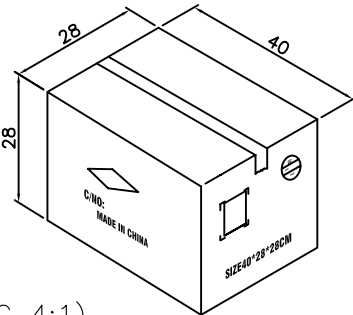





DESCRIPTION: 3.00MM MALE DUAL ROW PLUG WITH MOUNTING EARS

WERI PART NO: 662 0xx 218 22

SIZE

A4

1				2				3				4				5																																																																																																																			
 																Note: 1.Dimension: Carton Size:40*28*28(cm) 2.Quantity: <table><tr><th>Pin.</th><th>Pcs/Bag</th><th>Pcs/Carton</th><th>Pin.</th><th>Pcs/Bag</th><th>Pcs/Carton</th></tr><tr><td>2</td><td>1000</td><td>16000</td><td>14</td><td>500</td><td>5000</td></tr><tr><td>4</td><td>1000</td><td>16000</td><td>16</td><td>500</td><td>4000</td></tr><tr><td>6</td><td>1000</td><td>12000</td><td>18</td><td>500</td><td>4000</td></tr><tr><td>8</td><td>1000</td><td>10000</td><td>20</td><td>500</td><td>2000</td></tr><tr><td>10</td><td>500</td><td>8000</td><td>22</td><td>500</td><td>2000</td></tr><tr><td>12</td><td>500</td><td>5000</td><td>24</td><td>500</td><td>2000</td></tr></table>																Pin.	Pcs/Bag	Pcs/Carton	Pin.	Pcs/Bag	Pcs/Carton	2	1000	16000	14	500	5000	4	1000	16000	16	500	4000	6	1000	12000	18	500	4000	8	1000	10000	20	500	2000	10	500	8000	22	500	2000	12	500	5000	24	500	2000																																																										
Pin.	Pcs/Bag	Pcs/Carton	Pin.	Pcs/Bag	Pcs/Carton																																																																																																																														
2	1000	16000	14	500	5000																																																																																																																														
4	1000	16000	16	500	4000																																																																																																																														
6	1000	12000	18	500	4000																																																																																																																														
8	1000	10000	20	500	2000																																																																																																																														
10	500	8000	22	500	2000																																																																																																																														
12	500	5000	24	500	2000																																																																																																																														
 PE BAG   Carton (SC 4:1)																																																																																																																																			
<table><tr><td colspan="4">RoHS Compliant</td><td colspan="4"></td><td colspan="4"></td><td colspan="4"></td></tr><tr><td>G</td><td></td><td></td><td></td><td colspan="4">PROJECTION:</td><td colspan="4">GENERAL TOLERANCE</td><td colspan="4" rowspan="2">  </td></tr><tr><td>F</td><td></td><td></td><td></td><td colspan="4" rowspan="2"></td><td colspan="4">.X = +/- 0.2</td></tr><tr><td>E</td><td></td><td></td><td></td><td colspan="4">APPROVAL: RJ</td><td colspan="4">.XX = +/- 0.15</td></tr><tr><td>D</td><td></td><td></td><td></td><td colspan="4" rowspan="4"></td><td colspan="4">UNIT: MM</td><td colspan="2">DESCRIPTION: 3.00MM MALE DUAL ROW PLUG WITH MOUNTING EARS</td><td colspan="2">SIZE</td></tr><tr><td>C</td><td></td><td></td><td></td><td colspan="4">SCALE:</td><td colspan="2" rowspan="3">WERI PART NO: 6620 xx 21822_TPK</td><td colspan="2" rowspan="3">A4</td></tr><tr><td>B</td><td></td><td></td><td></td><td colspan="4">SHEET: 2/2</td></tr><tr><td>A</td><td></td><td></td><td></td><td colspan="4">DRAW: PEARL</td></tr><tr><td>REV</td><td>DATE</td><td>FILE</td><td>BY</td><td colspan="4"></td><td colspan="4"></td><td colspan="2"></td><td colspan="2"></td></tr></table>																RoHS Compliant																G				PROJECTION:				GENERAL TOLERANCE								F								.X = +/- 0.2				E				APPROVAL: RJ				.XX = +/- 0.15				D								UNIT: MM				DESCRIPTION: 3.00MM MALE DUAL ROW PLUG WITH MOUNTING EARS		SIZE		C				SCALE:				WERI PART NO: 6620 xx 21822_TPK		A4		B				SHEET: 2/2				A				DRAW: PEARL				REV	DATE	FILE	BY												
RoHS Compliant																																																																																																																																			
G				PROJECTION:				GENERAL TOLERANCE																																																																																																																											
F								.X = +/- 0.2																																																																																																																											
E								APPROVAL: RJ				.XX = +/- 0.15																																																																																																																							
D								UNIT: MM				DESCRIPTION: 3.00MM MALE DUAL ROW PLUG WITH MOUNTING EARS		SIZE																																																																																																																					
C								SCALE:				WERI PART NO: 6620 xx 21822_TPK		A4																																																																																																																					
B								SHEET: 2/2																																																																																																																											
A								DRAW: PEARL																																																																																																																											
REV	DATE	FILE	BY																																																																																																																																