


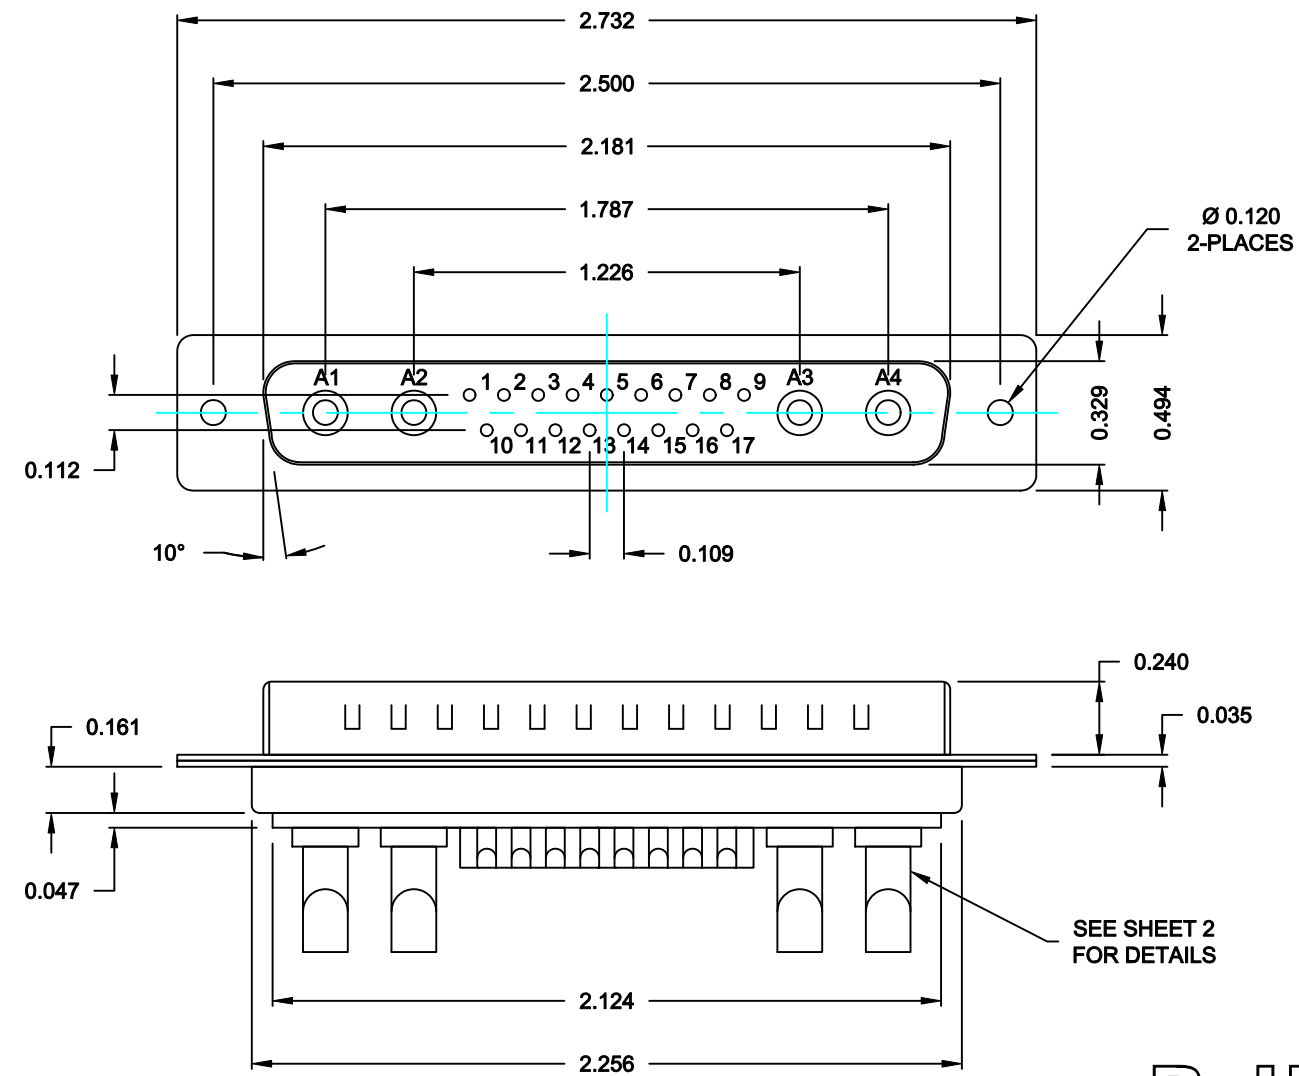

SPECIFICATIONS:

ELECTRICAL:	
INSULATOR RESISTANCE:	5,000 MegOHMS Min.
DIELECTRIC WITHSTANDING:	1,000VAC r.m.s.
OPERATING TEMPERATURE:	-55° C ~ +125° C
POWER CONTACT RESISTANCE:	1.0 MillioHMS Max.
POWER PINS:	SEE PART No. BELOW
SIGNAL CONTACT RESISTANCE:	2.7 MillioHMS Max.
SIGNAL PINS:	5 AMPS
MECHANICAL:	
CONTACT INSERTION FORCE:	4.5 Kg Max.
CONTACT SEPARATOR FORCE:	0.3Kg Min.
MATERIALS:	
CONTACTS:	COPPER ALLOY, FULL GOLD FLASH
INSULATOR:	PBT THERMOPLASTIC, 30% GLASS FILLED, UL94V-0 RATED, 230°C PROCESS TEMP.
SHELL:	STEEL
FINISH:	
SHELL:	NICKEL

680M21WA4PLYY1

20 = 20 AMPS
40 = 40 AMPS

RoHS COMPLIANT

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: M. SIGMON		DATE: 03-18-13	
		CHECKED: X		DATE: X	
NorComp	SCALE: N.T.S.		SHEET 1 OF 2		REV 0
	DWG NO. 680M21WA4PLYY1				

