


CATALOG LISTING
701PB542-RG

PAGE | OF |
1 1

5
ISSUE

CHECK

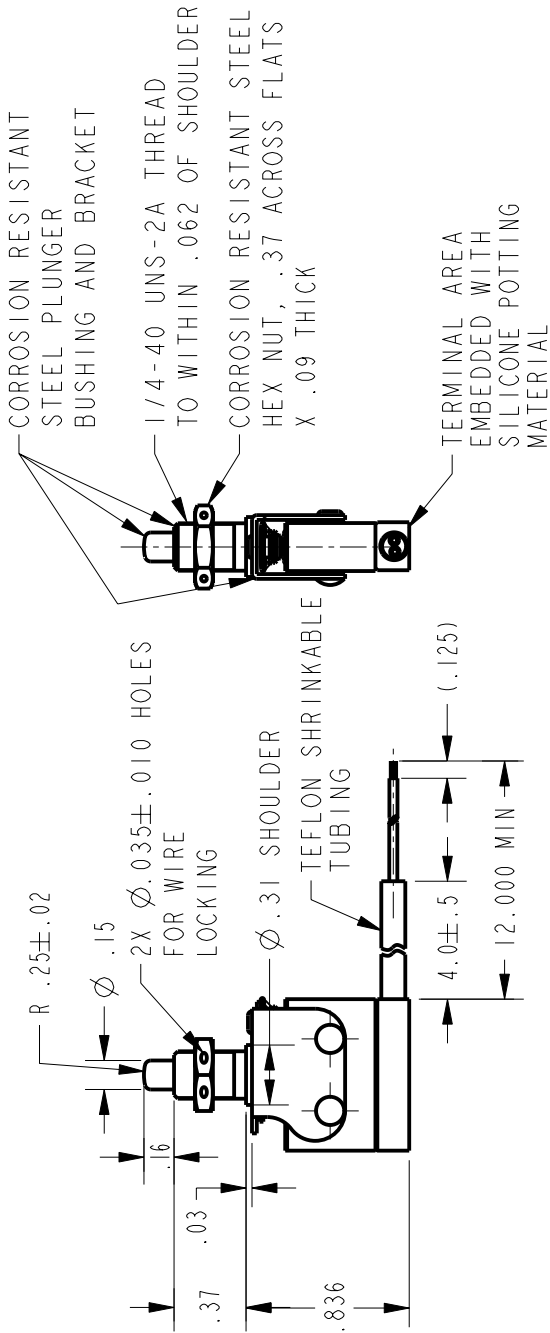

- NOTES
- 1 - UNIT INCLUDES "20HM2-1" BASIC SWITCH
 - 2 - RECOMMENDED FOR MANUAL OPERATION ONLY
 - 3 - FOR USE IN TEMPERATURE RANGE -65° F TO 392° F

ANSI Y14.5M-1982 APPLIES

THIRD ANGLE PROJECTION		DO NOT SCALE PRINT	
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		SCALE	FULL
ELECTRICAL DATA		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
CONTACT ARRANGEMENT 2X S P N C		ONE PLACE (.0)	
28 VOLTS DC RATING INDUCTIVE ---SEA LEVEL---1/4 AMP 70,000 FT---1/4 AMP RESISTIVE ---SEA LEVEL---1/2 AMP 70,000 FT---1/2 AMP		TWO PLACE (.00)	
		THREE PLACE (.000)	
		ANGLES	
		WEIGHT	