


PLUNGER DETAIL
SCALE 5 : 1

SR.10

R.015 MAX

.022

3X NO. 22 WIRE LEAD PER
MIL-W-22759/12
MARKED WITH CIRCUIT
IDENTIFICATION AND
WIRE GAGE (C-22, NC, 22
AND NO-22) PER MIL-W-5088

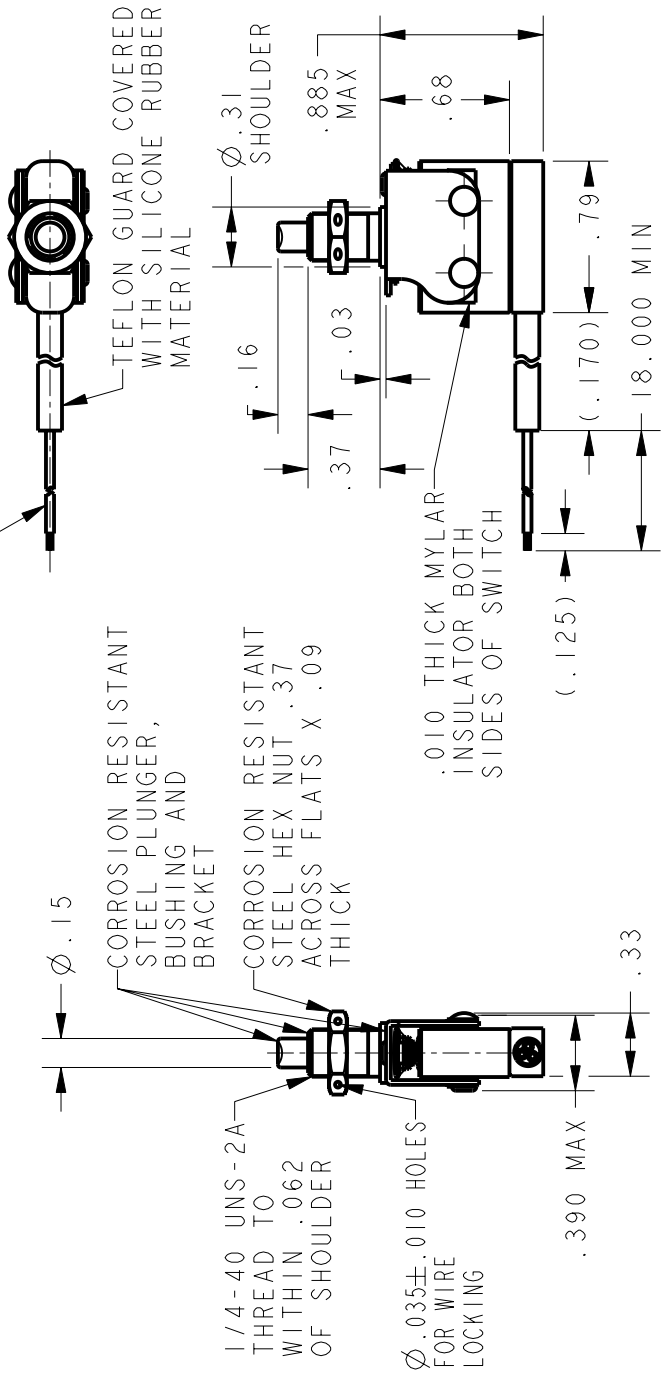

- 1 - UNIT INCLUDES CATALOG LISTING "6HM" TYPE BASIC SWITCH
- 2 - RECOMMENDED FOR MANUAL OPERATION ONLY
- 3 - FOR USE IN TEMPERATURE RANGE -65°F TO +500°F

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS		ELECTRICAL DATA		SCALE	FULL	DO NOT SCALE PRINT
OPERATING FORCE	— — — — — 1 LB APPROX	CONTACT ARRANGEMENT		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		
OVERTRAVEL	— — — — — .135 APPROX	LINE VOLTAGE	INDUCTIVE LOAD	ONE PLACE	(.00)	±.030
		28 VDC	2 AMP	TWO PLACE	(.00)	±.015
		115 VAC (400 CYCLE)	2 1/2 AMP	THREE PLACE	(.000)	±.005
				ANGLES		±
				WEIGHT		