
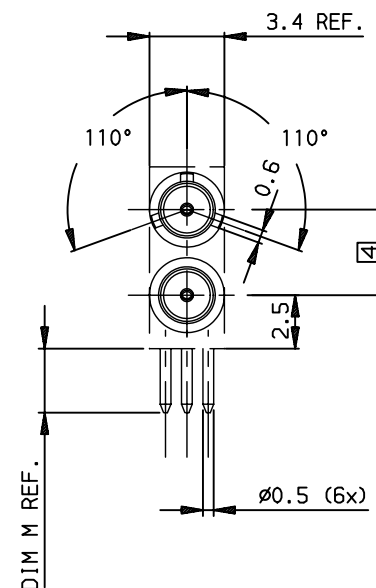


LEAD FREE P/N	DIM M	PCB Thk.	REMARKS
70239-001LF	2.80	1.6mm	
70239-002LF	3.80	2.4mm	
70239-003LF	2.20	1.6mm	CUSTOMER SPECIAL
70239-004LF	2.92	1.6mm	CUSTOMER SPECIAL

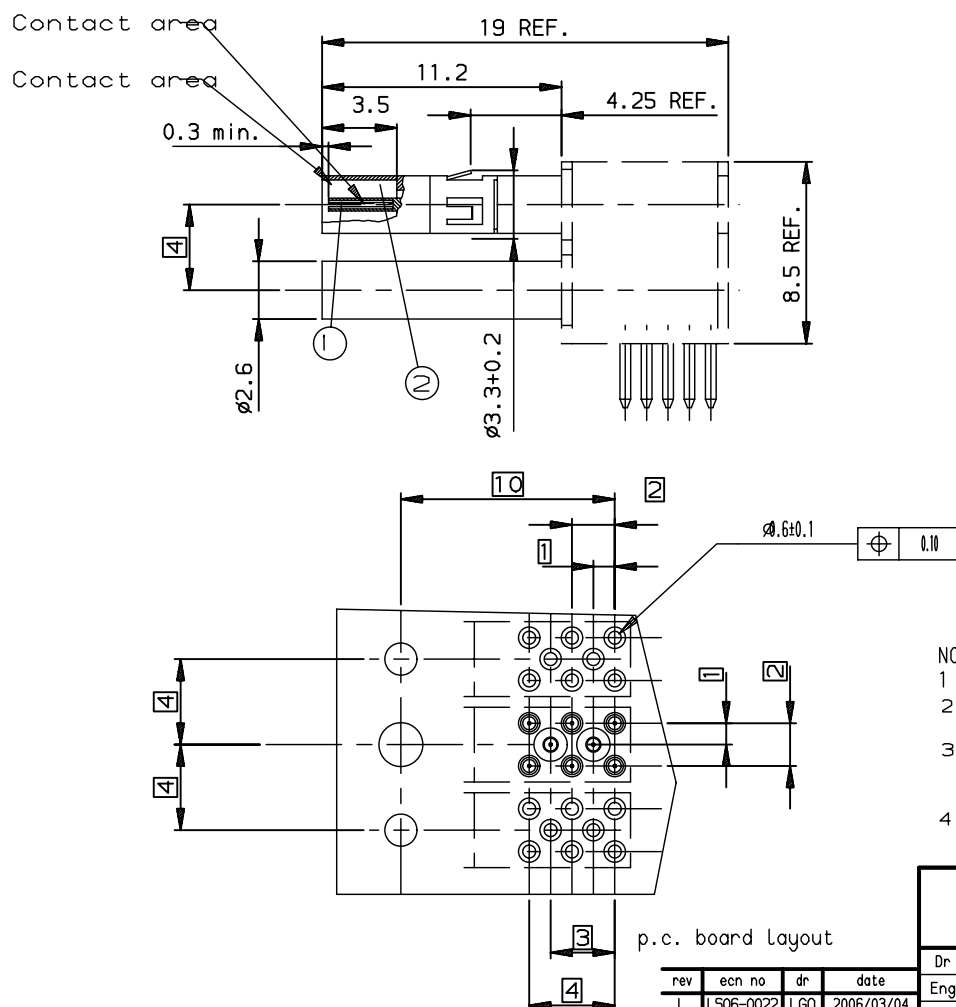

NOTE:

- 1 All dimensions are reference.
- 2 THIS PRODUCT WITH "LF" SUFFIX MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS -22-008.
- 3 THE HOUSING WILL WITHSTAND EXPOSURE TO 260 DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.6mm MINIMUM THICK CIRCUIT BOARD.
- 4 PACKAGING SPEC: SEE GS-14-920

European Views

www.fciconnect.com			surface ISO 1302			tolerance std ISO 406 ISO 1101		projection 		mm 	
			TOLERANCES UNLESS OTHERWISE SPECIFIED								
Dr	GOISNARD	2006/03/04	ANGULAR	LINEAR	0.X	±0.1	size A3	Scale 4			
Eng	GOISNARD	2006/03/04			0.XX	±0.1					
Chr	LEGARE	2006/03/04			0.XXX	±0.1					
Appr	LEGARE	2006/03/04	Product family				METRAL	Spec ref -			
			title R/A FEMALE 50ohm MINI COAX				dwg no 70239	Rev. N			
catalog no			-				CUSTOMER		sheet 1 of 1		

rev	ecn no	dr	date
L	L506-0022	LGO	2006/03/04
M	L507-0214	LGO	2007/08/20
N	L508-0057	LGO	2008/02/18
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

1.27µm Au Min.
Positions 1 & 2
Plating on contact area