



THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.


REVISION						
REV.	DESCRIPTION	DATE	APPROVED			
В	Updated Panel Cutout	11-09-11	LY			

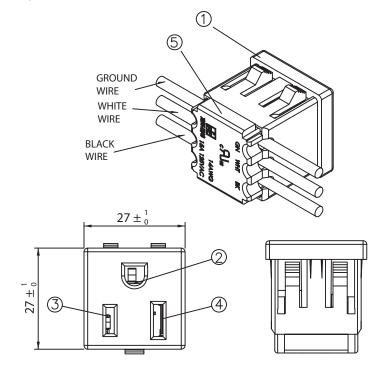












## **CONTROLLED**

5	Cover Insulator NYLON			
4	Contact PIN Brass Strip t=0.7mm Ni-Plated			
3	Contact PIN Brass Strip t=0.7mm	1		
2	Contact PIN Brass Strip t=0.7mm			
1	Body Insulator NYLON 1			

Dim range	Tolerance +/-	Qualtek Electronics Corp.  PPC DIVISION		
(mm)	(mm)	Part Number:	739W-X2/40	RoHS Compliant
0-1	0.15	Description: AC RECEPTACLE		
1-6	0.20			
6-18	0.30		LINUT	DEV D
18-50	0.50		UNIT: mm	REV. B
50-120	0.70	Drawn / Date	Checked / Date	Approved / Date
120-250	0.90	R.Nuti	10-02-07	JJH / 10-02-07
250-500	1.20	10-02-07		3311/ 10-02-07

## NOTES:

USE 14AWG SOLID COPPER WIRE ONLY

RATING: 15A 125V AC APPROVALS: UL,cUL

PANEL THICKNESS: 0.8~1.8mm

**RoHS COMPLIANT**