





MICRO SWITCH
a Honeywell Division

FED.MFG.CODE 91929

**SMALL PRECISION
LIMIT SWITCH**

CATALOG LISTING

914CE16-18

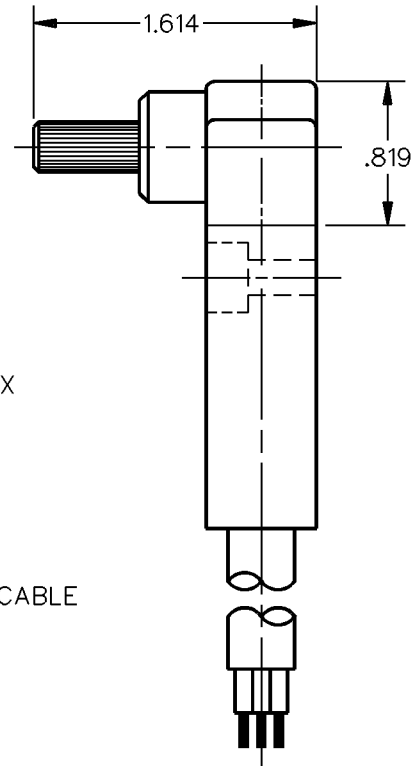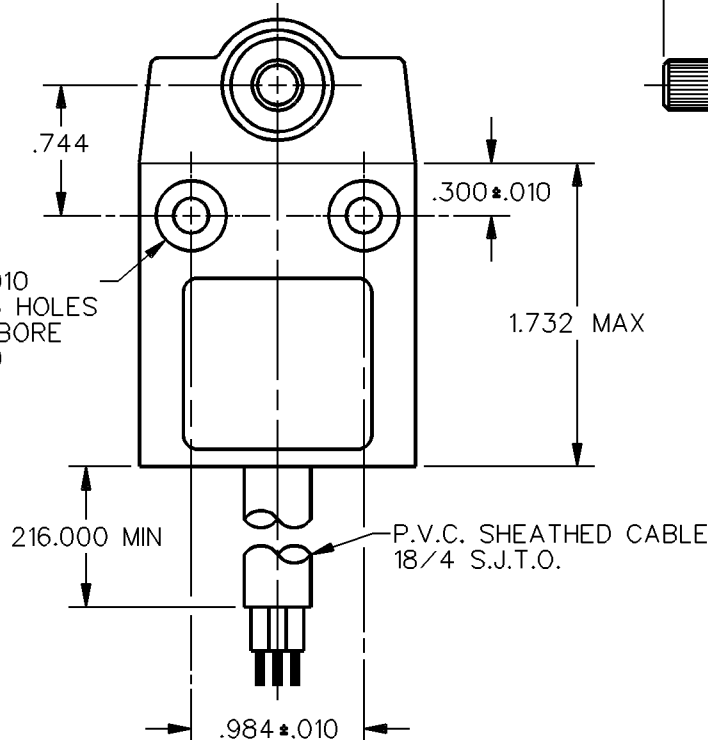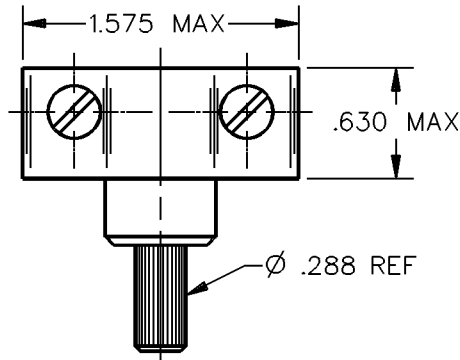


Ø .200 ± .010
MOUNTING HOLES
(Ø .40 C'BORE
.24 DEEP)

P.V.C. SHEATHED CABLE
18/4 S.J.T.O.

- NOTES
1 - ZINC HOUSING FINISHED WITH GRAY PAINT
2 - SWITCH WILL ACTUATE IN BOTH DIRECTIONS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS		ELECTRICAL DATA		SCALE FULL		DO NOT SCALE PRINT	
OPERATING FORCE — — — 3 IN. LB MAX		CONTACT ARRANGEMENT S P D T		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			
RELEASE FORCE — — — 10 IN. OZ MAX		L109 5A 1/10HP 125 OR <u>250</u> VAC  					
PRETRAVEL — — — — — 30° MAX							
DIFFERENTIAL TRAVEL — — — 3° MAX							
OVERTRAVEL — — — — — 40° MIN							
				ONE PLACE (.01) ± .030			
		TWO PLACE (.00) ± .015					
		THREE PLACE (.000) ± .005					
		ANGLES ±					
		WEIGHT					



M 914CE16-18

**DRAWING
NUMBER**

1

ISSUE

REPLACES

RELEASE NO. PR-17749

CHECK

CHECK

CHECK

CHECK

20 OCT 89

MAM

DDM/CAD

DRAWN