
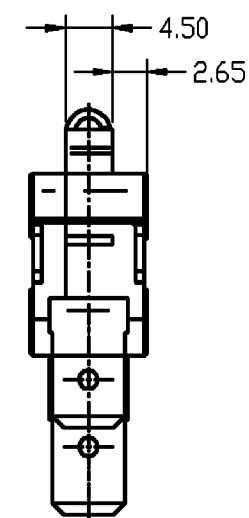
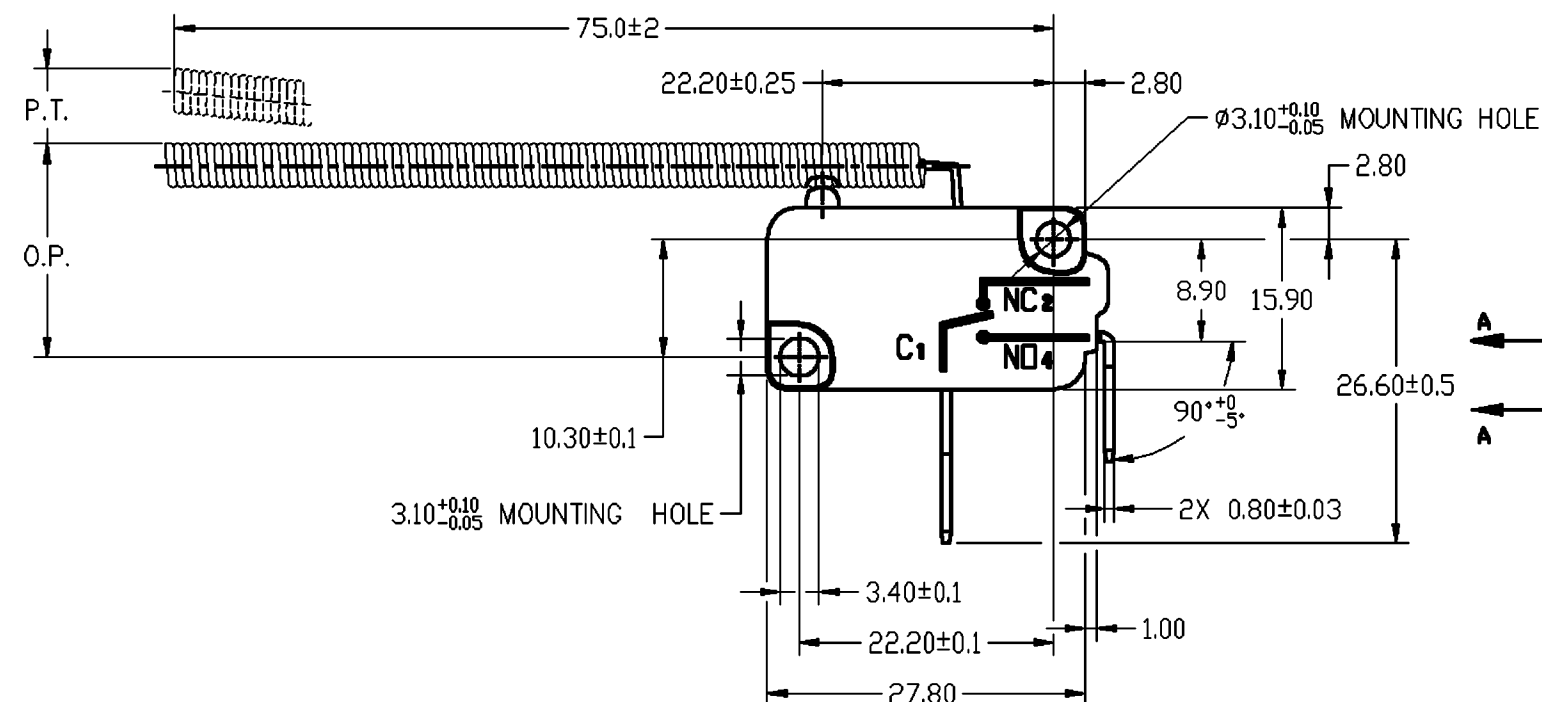
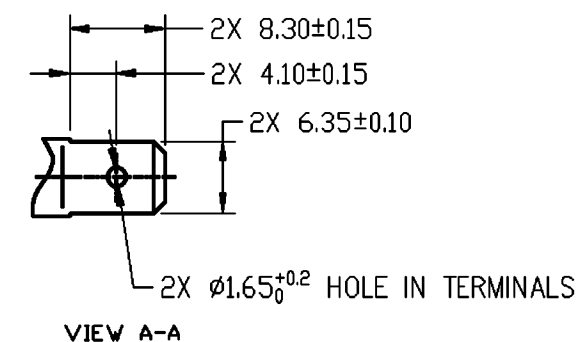


926AS4

REV	DOCUMENT	CHANGED BY	CHECK
C	0072660	AV 14DEC10	KNR

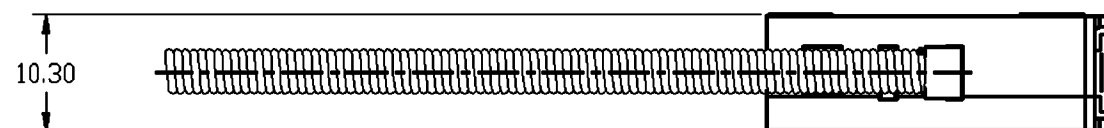

NOTES :-

1. MOUNTING HOLES WILL ACCEPT Ø3 MAX PINS OR SCREWS.
2. TERMINALS WILL ACCEPT 6.3 WIDE QUICK CONNECT RECEPTACLES AND COMPLY WITH EN61058-1 REQUIREMENTS.
3. CONTACTS ARE GOLD PLATED
4. MADE IN CHINA

CHARACTERISTICS		ELECTRICAL DATA		DESIGN UNITS: MM TOLERANCES UNLESS NOTED: NO PLACE X ± - ONE PLACE .X ± 0.4 TWO PLACE .XX ± - THREE PLACE .XXX ± - FOUR PLACE .XXXX ± - ANGLES X ± -		DRAWN	AV	14DEC10	Honeywell			
OPERATING FORCE 40g MAX		CONTACT ARRANGEMENT	BREAK DISTANCE			CHECK	VJJ	14DEC10				
DIFFERENTIAL FORCE		0.1A 125V ~ 0.1A 30V = 25T85µ5E4		THIRD ANGLE PROJECTION 		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH - BASIC			
RELEASE FORCE 10g MIN												
FREE POSITION												
PRETRAVEL 15 MAX												
DIFFERENTIAL TRAVEL 1.2 MAX												
OVERTRAVEL				INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE	TYPE	DRAWING NAME		REV	
FULL OVERTRAVEL FORCE				RASTER			A3	I	926AS4		C	
							SCALE	1:1	SHEET		1 OF 1	