

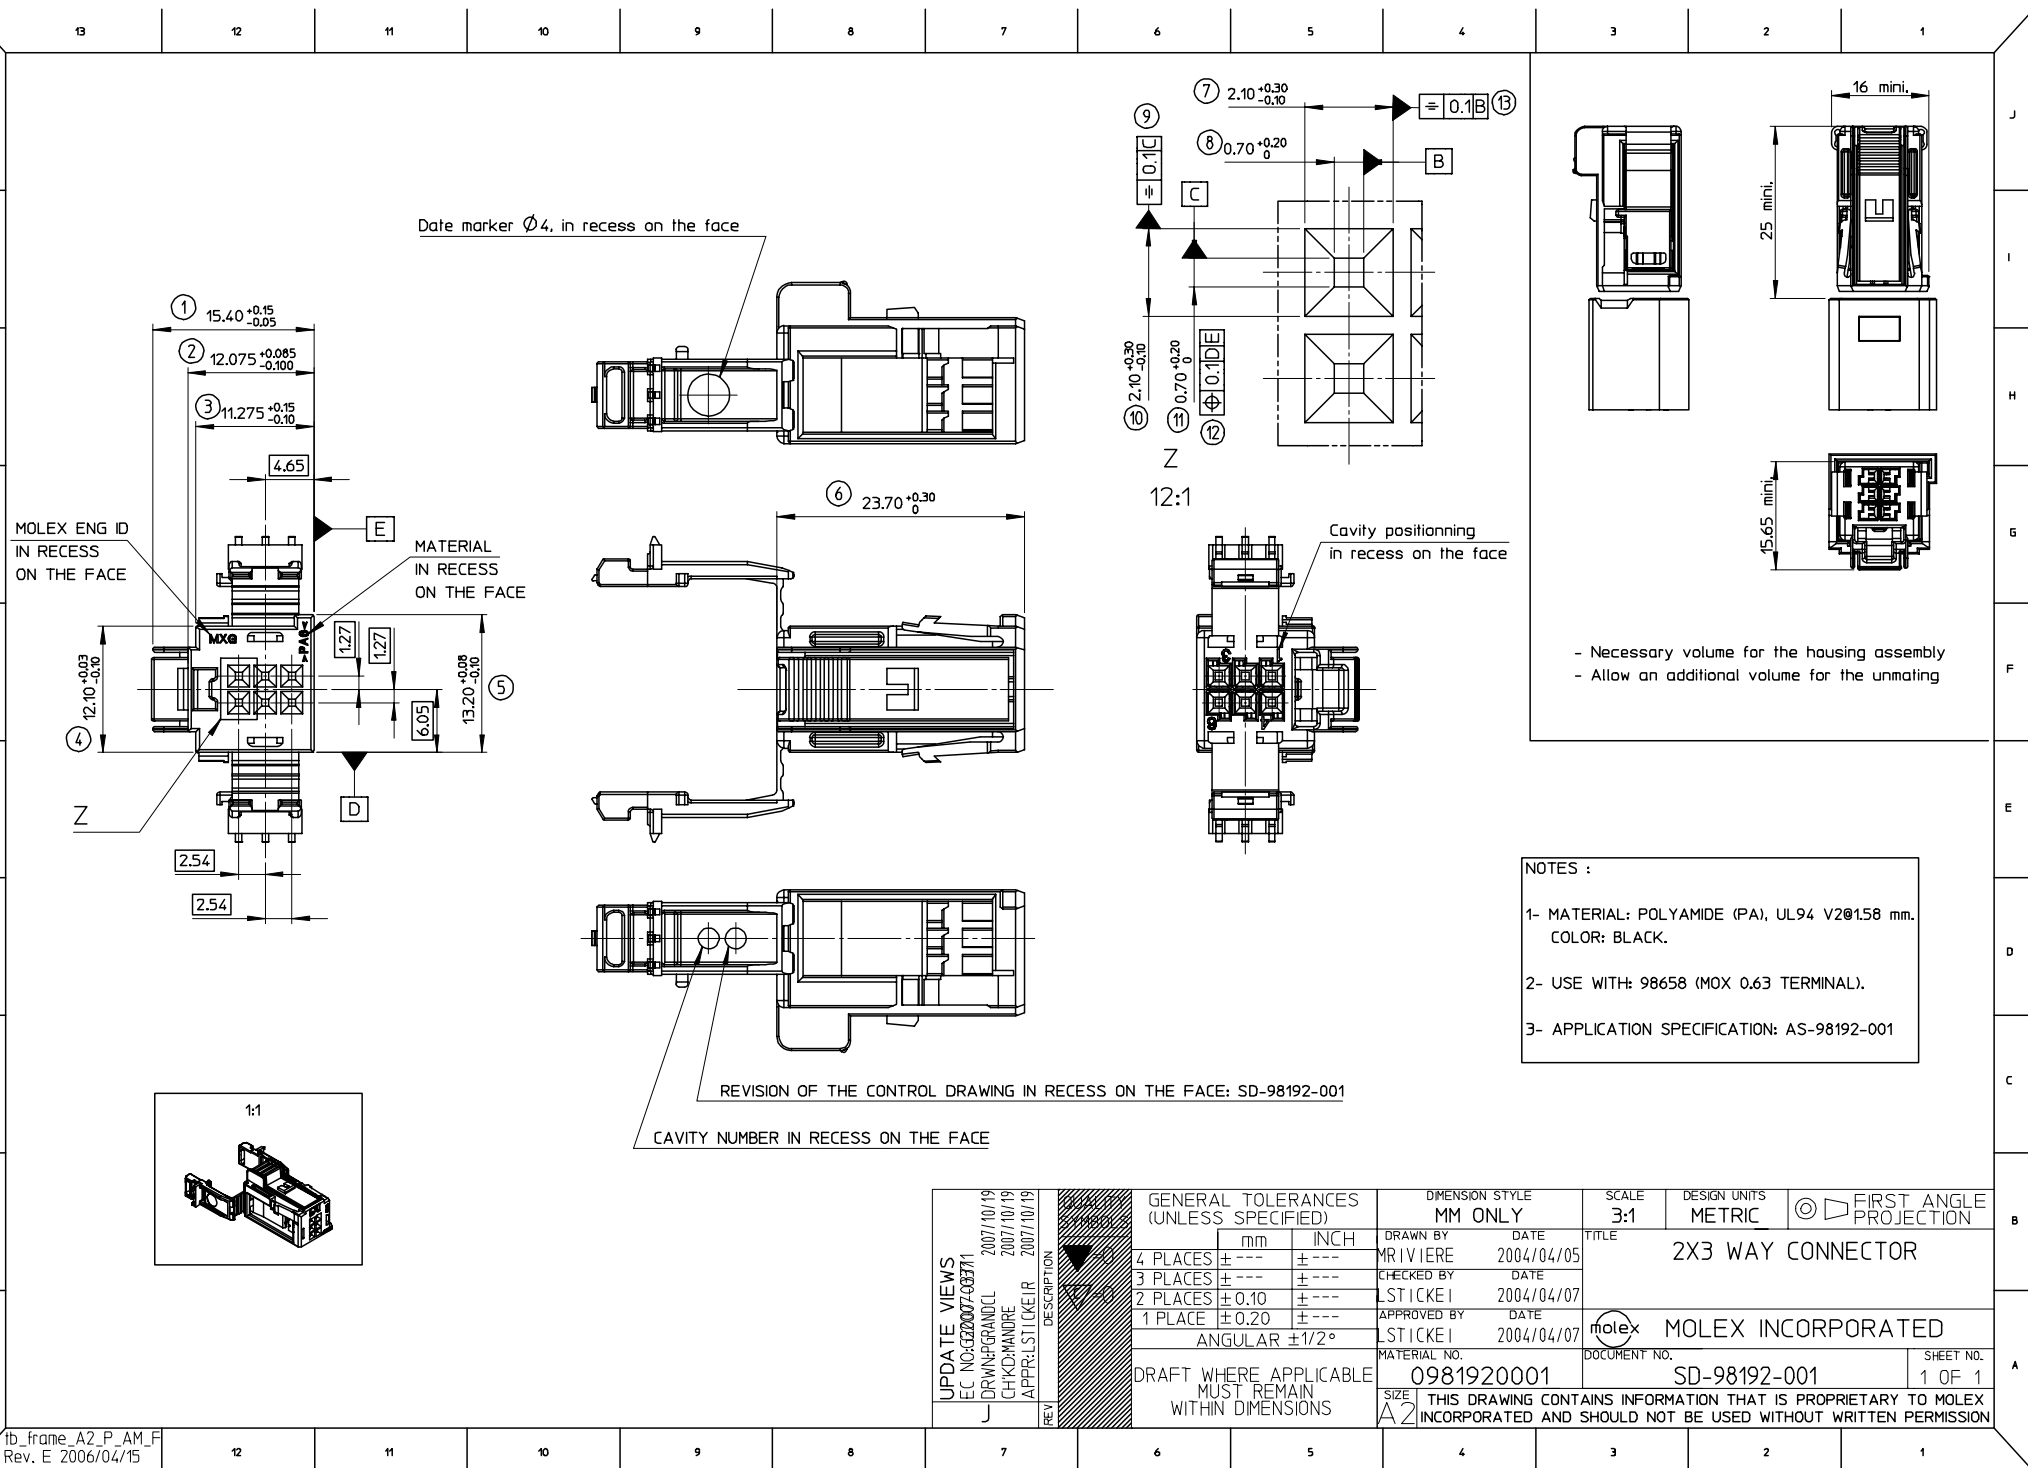
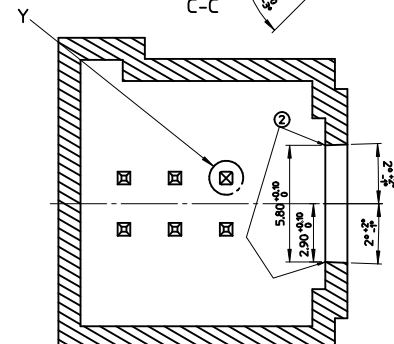
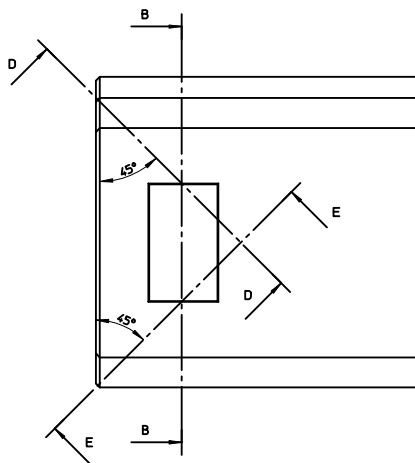
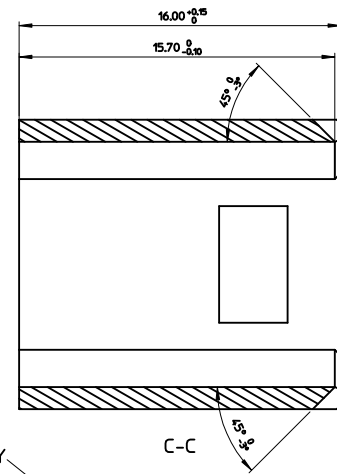

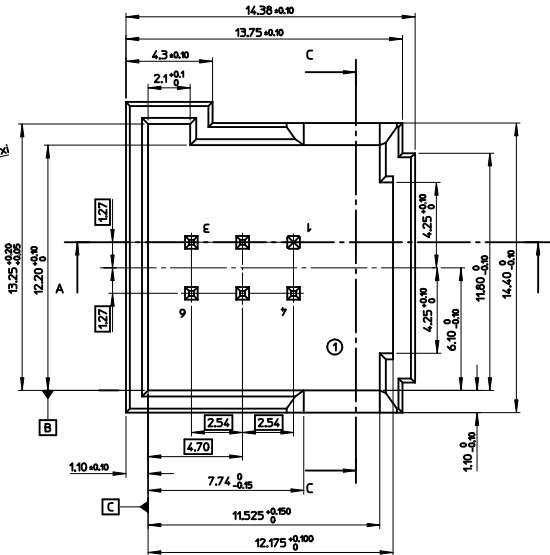
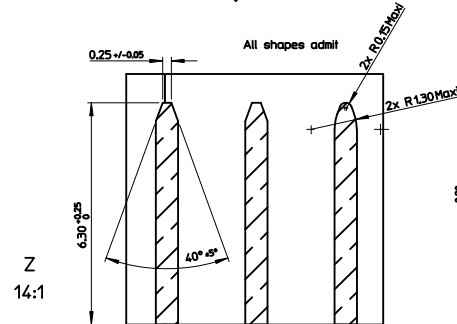
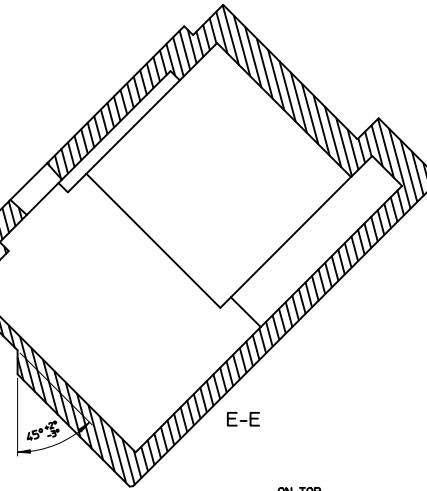


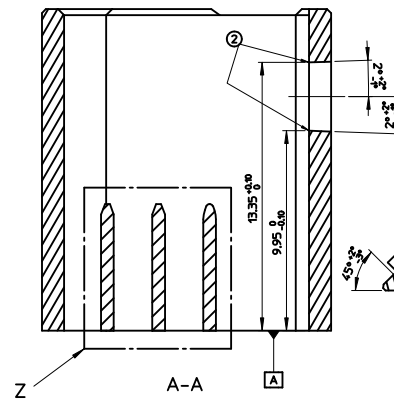

Rev	Date	Revision
A	2000/04/20	FIRST RELEASE

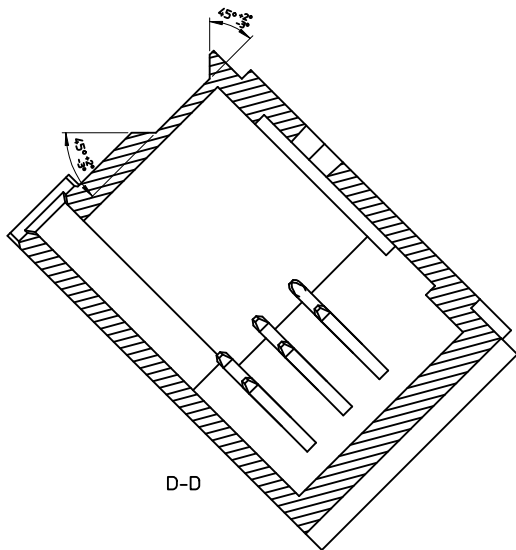

materials :

- Header PBT 20%
- Pin CuSn6 or CuFe12
- Tin plating 0.8 to 3.34µm

marking :

- 1 - The cavity marking must be in recess of the face
- 2 - No burrs allow in this area
- 3 - Chamfers or radii not size 0.5Maxi

FIRST RELEASE EEC NO: G2011-0181 DRW:ND03SANTOS 2011/04/20 CHKD: APPR:CBUCHAN 2011/06/21	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	FIRST ANGLE PROJECTION
		mm INCH	MM ONLY	8:1	METRIC	
		4 PLACES ± --- ± ---	PPOZZO 2000/09/04			
		3 PLACES ± --- ± ---	CHECKED BY DATE			
MATERIAL NO. 0981920001 SD-98192-003 SHEET NO. 1 OF 1		2 PLACES ± 0.05 ± ---	PGRANDCL 2001/02/09			
		1 PLACE ± 0.10 ± ---	APPROVED BY DATE			
		ANGULAR ± 1/2°	CBOUCHAN 2011/06/21			
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				