



A

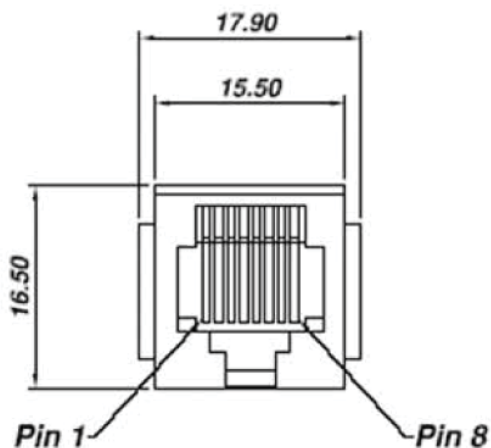

Materials:

- Insulator: P.B.T. Glass Filled, UL94V-0
 - Soldering Temperature: 235°C

- Spring Wire: 0.45MM Dia. Phosphor Bronze Gold Plating over Nickel

- Color: Black


Electrical:

- Insulation Resistance: 500MΩ Min.
- Contact Resistance: 20MΩ Max.
- Rating Current: 1.5A Max.
- Rating Voltage: 120V AC
- Dielectric Withstanding: 1,000V AC at 1 Minute
- Operating Temperature: -40°C ~ +85°C
- Durability: 500 Mating cycles Min.


B

A

C




D

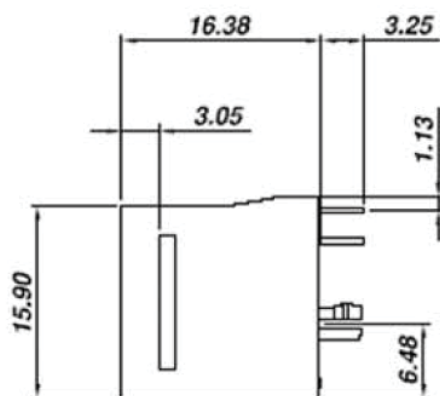

D

E

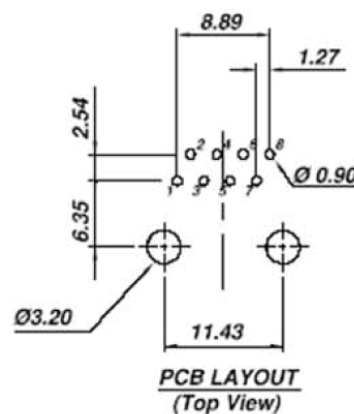

F

Scale	1:1							Name
TOLERANCE						Drawn	12.22.11	Chappel
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°					 		
			Modification	Date	Name			

Item No.	Item Description	Unit	Quantity	Unit Price	Total Price
----------	------------------	------	----------	------------	-------------

A-2014-2-3-R

Title	PCB Jack, 8P8C, 180°, Top Entry, 50μ", with Flange, Black
-------	--

Drawing No.

rev00

Replace

Sheet

RoHS Complaint

ASSMANN
WVSVV components

H

H